



河南盛淼仪器有限公司
HENAN SHENGMIAO INSTRUMENT CO., LTD.

公司简介

Company Profile

河南盛淼仪器有限公司，坐落于孔孟之乡山东济宁，专注于各种规格蜘蛛吊、护坡锚固钻机、隧道锚固钻机、光伏打桩机、护栏打桩机、潜孔钻机、旋挖钻机、悬臂钻机、抗浮锚杆钻机、水井钻机、长螺旋钻机、地质勘探取芯钻机、光伏板安装车、移动照明车、地基打桩机、吊改钻挖改钻、四不像车、履带运输车、随车吊、平板吊、抓木机、高空车、履带底盘总成等工程机械类产品的设计、研发与销售。公司的生产能力和技术水平在同行业中处于先进地位，多年以来为工程制造行业贡献出多种新型特型产品，是业内颇具影响力的机械制造公司之一。

公司秉承“携手共赢，共创辉煌”的发展理念，在近年来成为多家贸易公司的重要供方之一，与国外很多企业建立了长期的合作关系。

公司始终遵循“以质量求生存，以科技求发展”的经营理念，凭借优良的企业文化、先进的生产设备、精湛的技术力量、好的管理方法、可靠的质量和周到的售后服务，用坚定的信念和毅力树立起机械产品品牌和企业形象，促进企业不断壮大和发展。

我们将不断学习先进技术和管理经验，努力为广大客户提供更高品质的产品和服务，我们期待与您携手合作，共创美好明天！

Henan Shengmiao Instrument Co., Ltd. , located in Jining, Shandong Province, the hometown of Confucius and Mencius, specializes in various specifications of spider cranes, slope anchoring rigs, tunnel anchoring rigs, photovoltaic piling rigs, guardrail piling rigs, submerged drilling rigs, rotary drilling rigs, jib drilling rigs, anti-floating anchor drilling rigs, water well drilling rigs, long auger drilling rigs, geologic exploration core drilling rigs, photovoltaic panels installation trucks, mobile lighting trucks, foundation piling rigs, cranes to drilling digging to drilling, The company is specialized in the design, development and sales of construction machinery products, such as four unlike vehicles, crawler trucks, truck cranes, flatbed cranes, wood grabbers, aerial vehicles, crawler chassis assemblies, etc. The production capacity and technical level of the company are among the highest in the industry. The company's production capacity and technical level in the industry in an advanced position, over the years for the engineering manufacturing industry to contribute a variety of new special products, is the industry's influential machinery manufacturing company.

The company adheres to the “win-win, create brilliant” development concept, in recent years has become one of the important suppliers of a number of trading companies, and many foreign enterprises to establish a long-term cooperative relationship.

The company has always followed the “quality of survival, science and technology and development” business philosophy, with excellent corporate culture, advanced production equipment, exquisite technical force, good management methods, reliable quality and considerate after-sales service, with firm beliefs and perseverance to set up a brand of machinery products and corporate image, and to promote the continuous growth and development of enterprises. and development.

We will continue to learn advanced technology and management experience, and strive to provide our customers with higher quality products and services, we look forward to working with you to create a better tomorrow!



目录

contents

03/04-----	公司实力展示	Company Strength Display
05/05-----	履带蜘蛛吊机介绍	Introduction to Crawler Spider Cranes
06/07-----	1.2吨蜘蛛吊机	1.2-ton spider crane
08/09-----	1.5吨蜘蛛吊机	1.5-ton spider crane
10/11-----	3吨蜘蛛吊机	3-ton spider crane
12/13-----	4吨蜘蛛吊机	4-ton spider crane
14/15-----	5吨蜘蛛吊机	5-ton spider crane
16/17-----	8吨蜘蛛吊机	8-TON SPIDER CRANE
18/19-----	10吨蜘蛛吊机	10-ton spider crane
20/21-----	12吨蜘蛛吊机	12-ton spider crane
22/23-----	16吨蜘蛛吊机	16-ton spider crane
24/24-----	型号齐全 现货供应	Complete range of models · In-stock supply

盛淼仪器业务版图

Shengmiao Instruments Business Map

盛淼仪器在国内形成了比较完善的售后服务体系,优质的产品,充足的配件供应,快速高效的售后服务使公司产品畅销全国各地,并远销南非、新西兰、中东、土耳其、马来西亚、蒙古、俄罗斯等二十多个国家和地区。

Shengmiao Instrument Industry has formed a relatively complete after-sales service system in China. High quality products, adequate supply of accessories, and fast and efficient after-sales service have made its products sell well all over the country, and are exported to more than 20 countries and regions, including South Africa, New Zealand, the Middle East, Türkiye, Malaysia, Mongolia, Russia, etc.



生产车间 Workshop



履带蜘蛛吊机 Crawler spider crane

履带蜘蛛吊机是一种采用履带行走结构的起重设备，因其外形类似蜘蛛而得名。

它具有以下主要特点和优势：

稳定性好：采用优质钢材，载重能力大，防滑性能好，适用于各种复杂地形和环境。

适应性强：适用于沼泽、河滩、沙漠、水田、热带雨林、雪地和冰面等复杂的路况，能够在各种地形和环境稳定行走。

操作简便：操作省力，易实现自动化控制，配备电启动和液压散热系统，提高工作效率。

多功能性：具备转向、回转、伸缩、起升、变幅等多项功能，吊臂可根据施工进行灵活调整。

使用范围：

电力施工：在电网施工现场，履带蜘蛛吊机能够精准吊装，确保设备与带电部位的安全距离符合规定。

建筑和市政工程：适用于各种建筑物和屋顶内的钢结构安装工程，以及市政建筑施工如机场、火车站、大坝施工现场等。

狭窄空间作业：特别适合在狭窄空间内工作，如室内玻璃安装、幕墙安装、屋顶工作等。

抢险救灾：适用于救灾抢险工作，能够在复杂地形和恶劣环境下稳定工作。

工厂和汽车制造：用于工厂、汽车制造等车间的设备维护、线路更换和材料提升，特别是在桥式起重机没有足够工作空间的地方。

The Crawler Spider Crane is a lifting device with a crawler traveling structure, so named because of its spider-like appearance.

It has the following main features and advantages:

Good stability: the use of high-quality steel, load capacity, good anti-skid performance, suitable for a variety of complex terrain and environment.

Adaptability: Suitable for complex road conditions such as swamps, river beaches, deserts, paddy fields, tropical rainforests, snow and ice, etc., and capable of stable travel in various terrains and environments.

Simple operation: Effortless operation, easy automation, electric starter and hydraulic cooling system to enhance working efficiency.

Multi-functional: Equipped with various functions such as steering, rotating, telescoping, lifting, luffing, etc. The boom can be flexibly adjusted according to the construction work.

Scope of use :

Electric power construction: In the construction site of electric power network, the crawler spider crane can lift accurately and ensure the safety distance between the equipment and the electrically charged parts comply with the regulations.

Construction and Municipal Engineering: Suitable for steel structure installation in all kinds of buildings and roofs, as well as municipal construction such as airports, railway stations, dam construction sites, etc.

Narrow Space Work: Especially suitable for work in narrow space, such as indoor glass installation, curtain wall installation, roof work, etc.

Disaster Relief: Suitable for disaster relief work and can work stably in complicated terrain and harsh environment. Factory and automobile manufacturing: For equipment maintenance, line replacement and material lifting in factories and automobile manufacturing plants, especially when bridge cranes do not have enough working space. Especially in areas where bridge cranes do not have enough working space.




施工案例 Construction case








1.2吨蜘蛛吊机 1.2-ton spider crane

● 性能特点 Performance Characteristics

- 体积小、自重轻、结构紧凑，广泛用于楼层楼顶吊装，变电站检修等小空间
- 橡胶履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 可加遥控装置 操作便捷
- Small size, light weight, compact structure, widely used in small space such as floor roof lifting, substation maintenance, etc.
- Rubber tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- Remote control can be added for easy operation

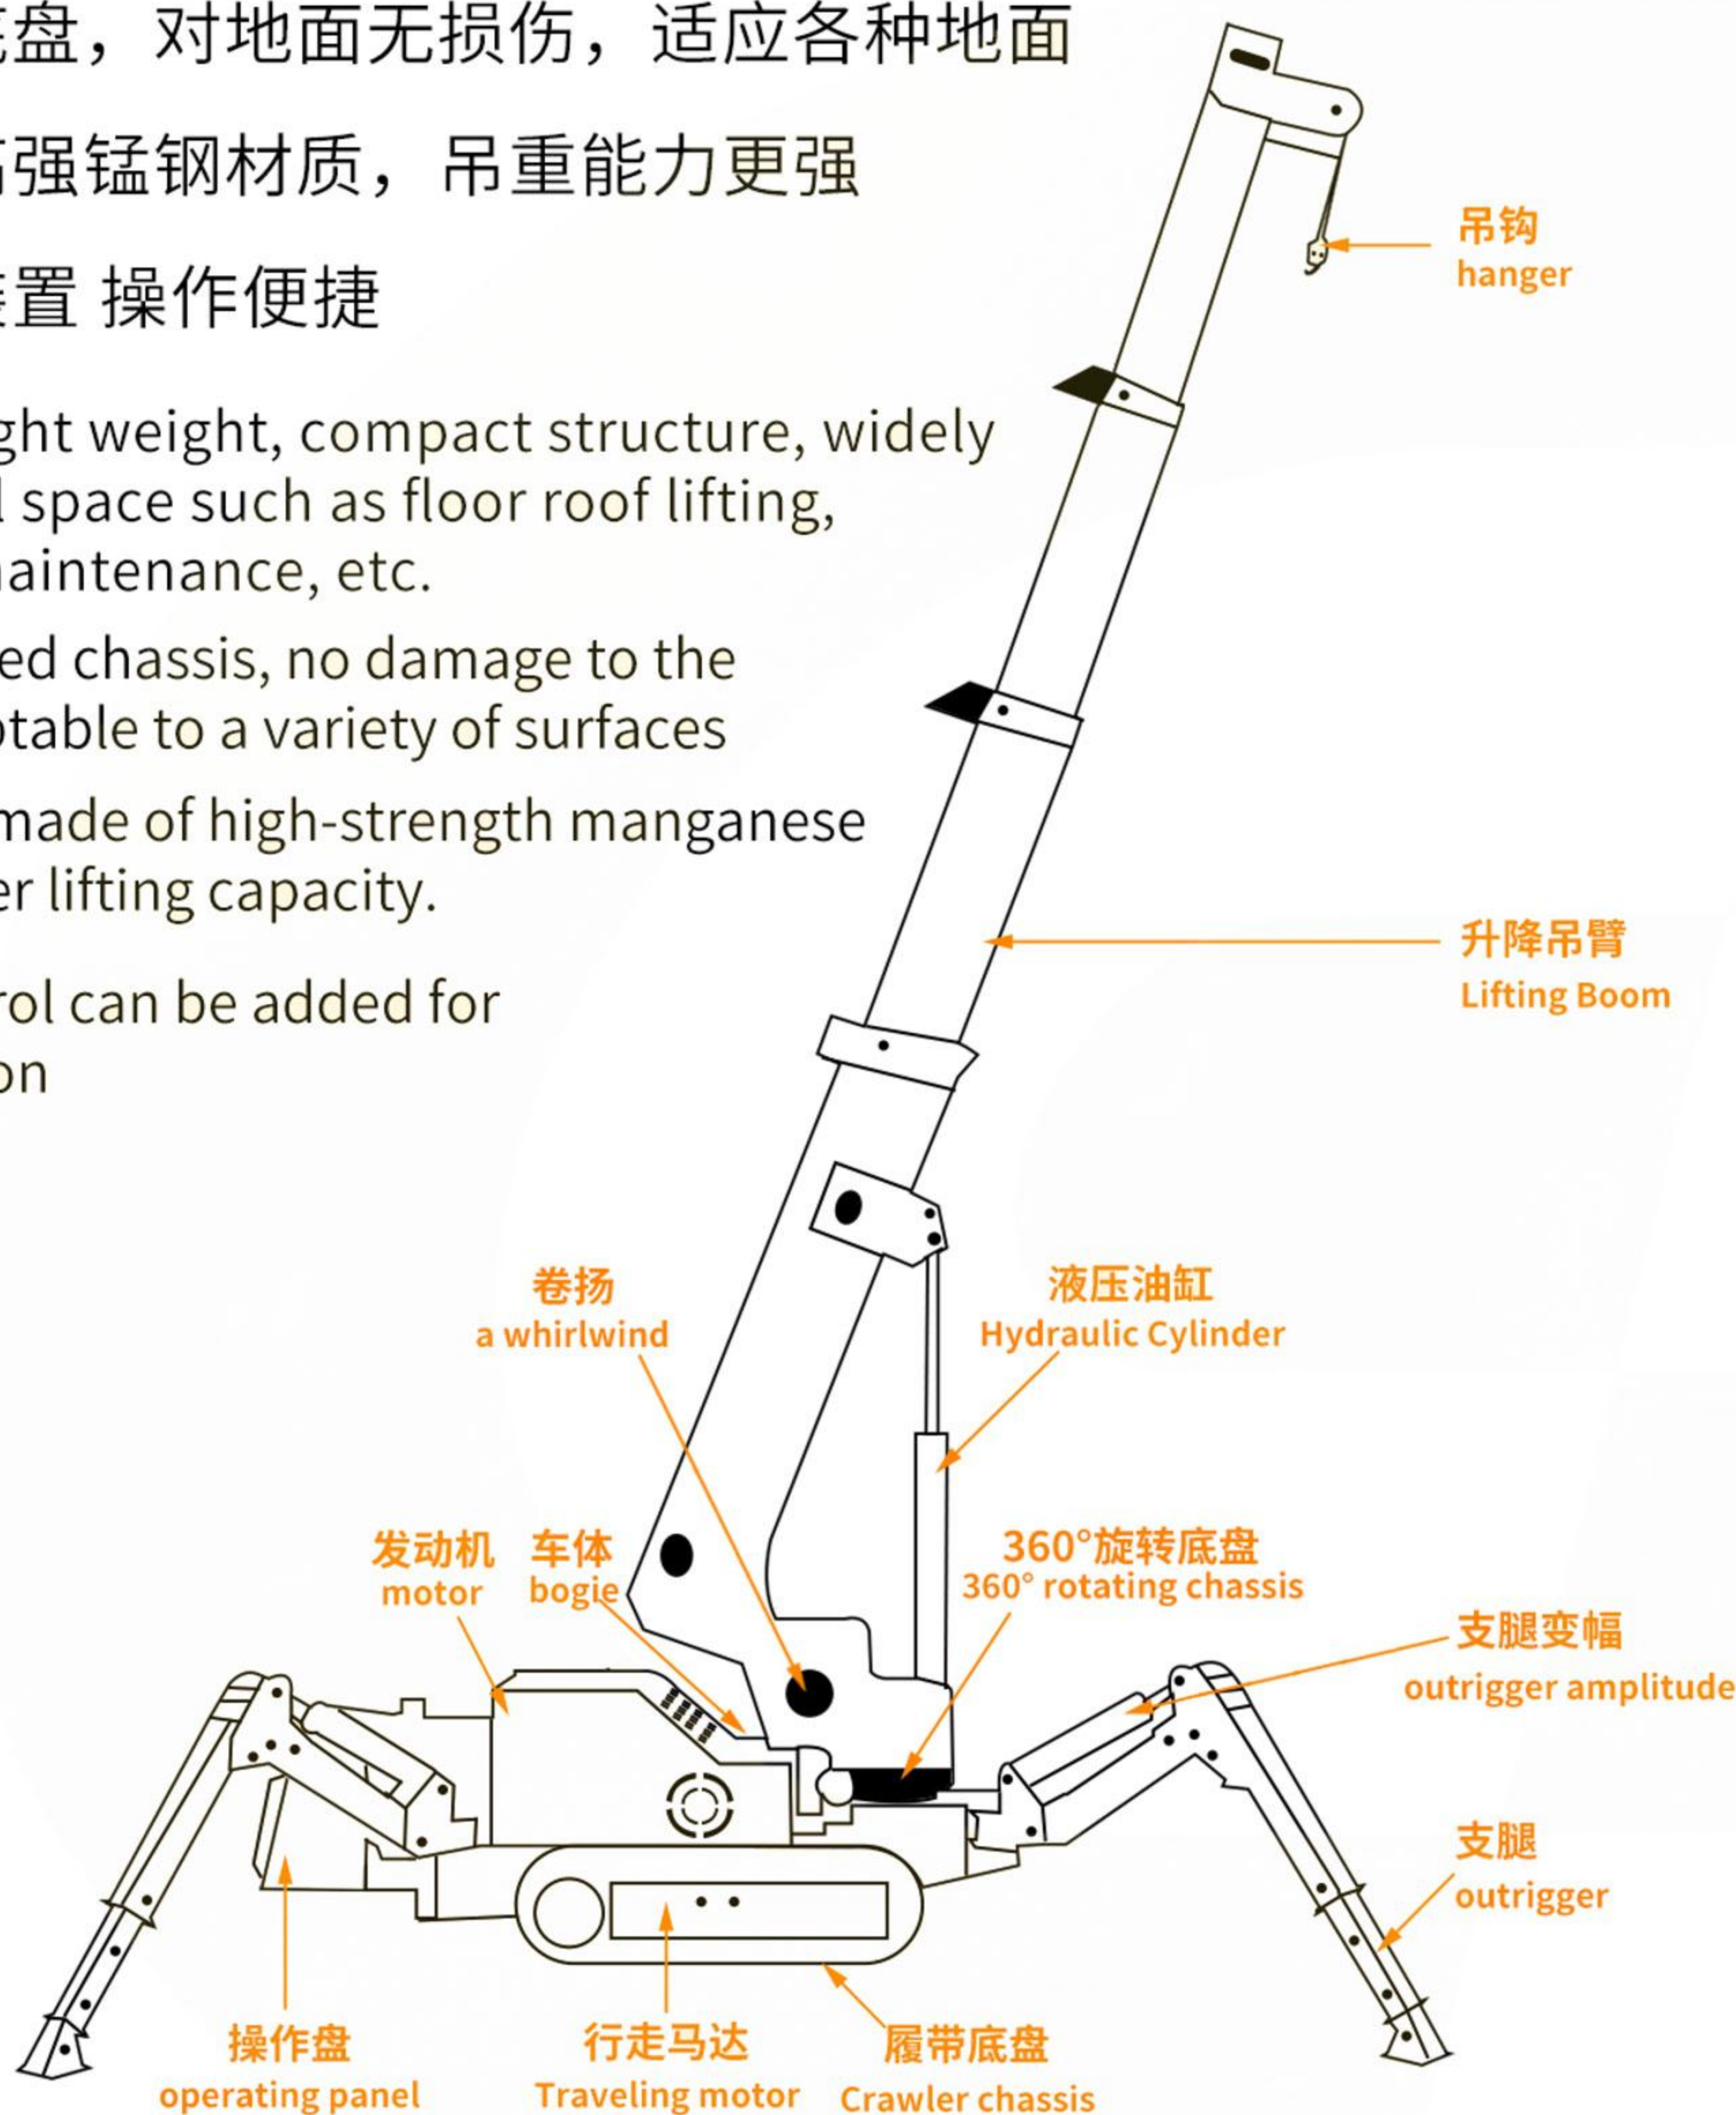

1.2吨蜘蛛吊吊重表
1.2 ton spider crane lifting weight chart

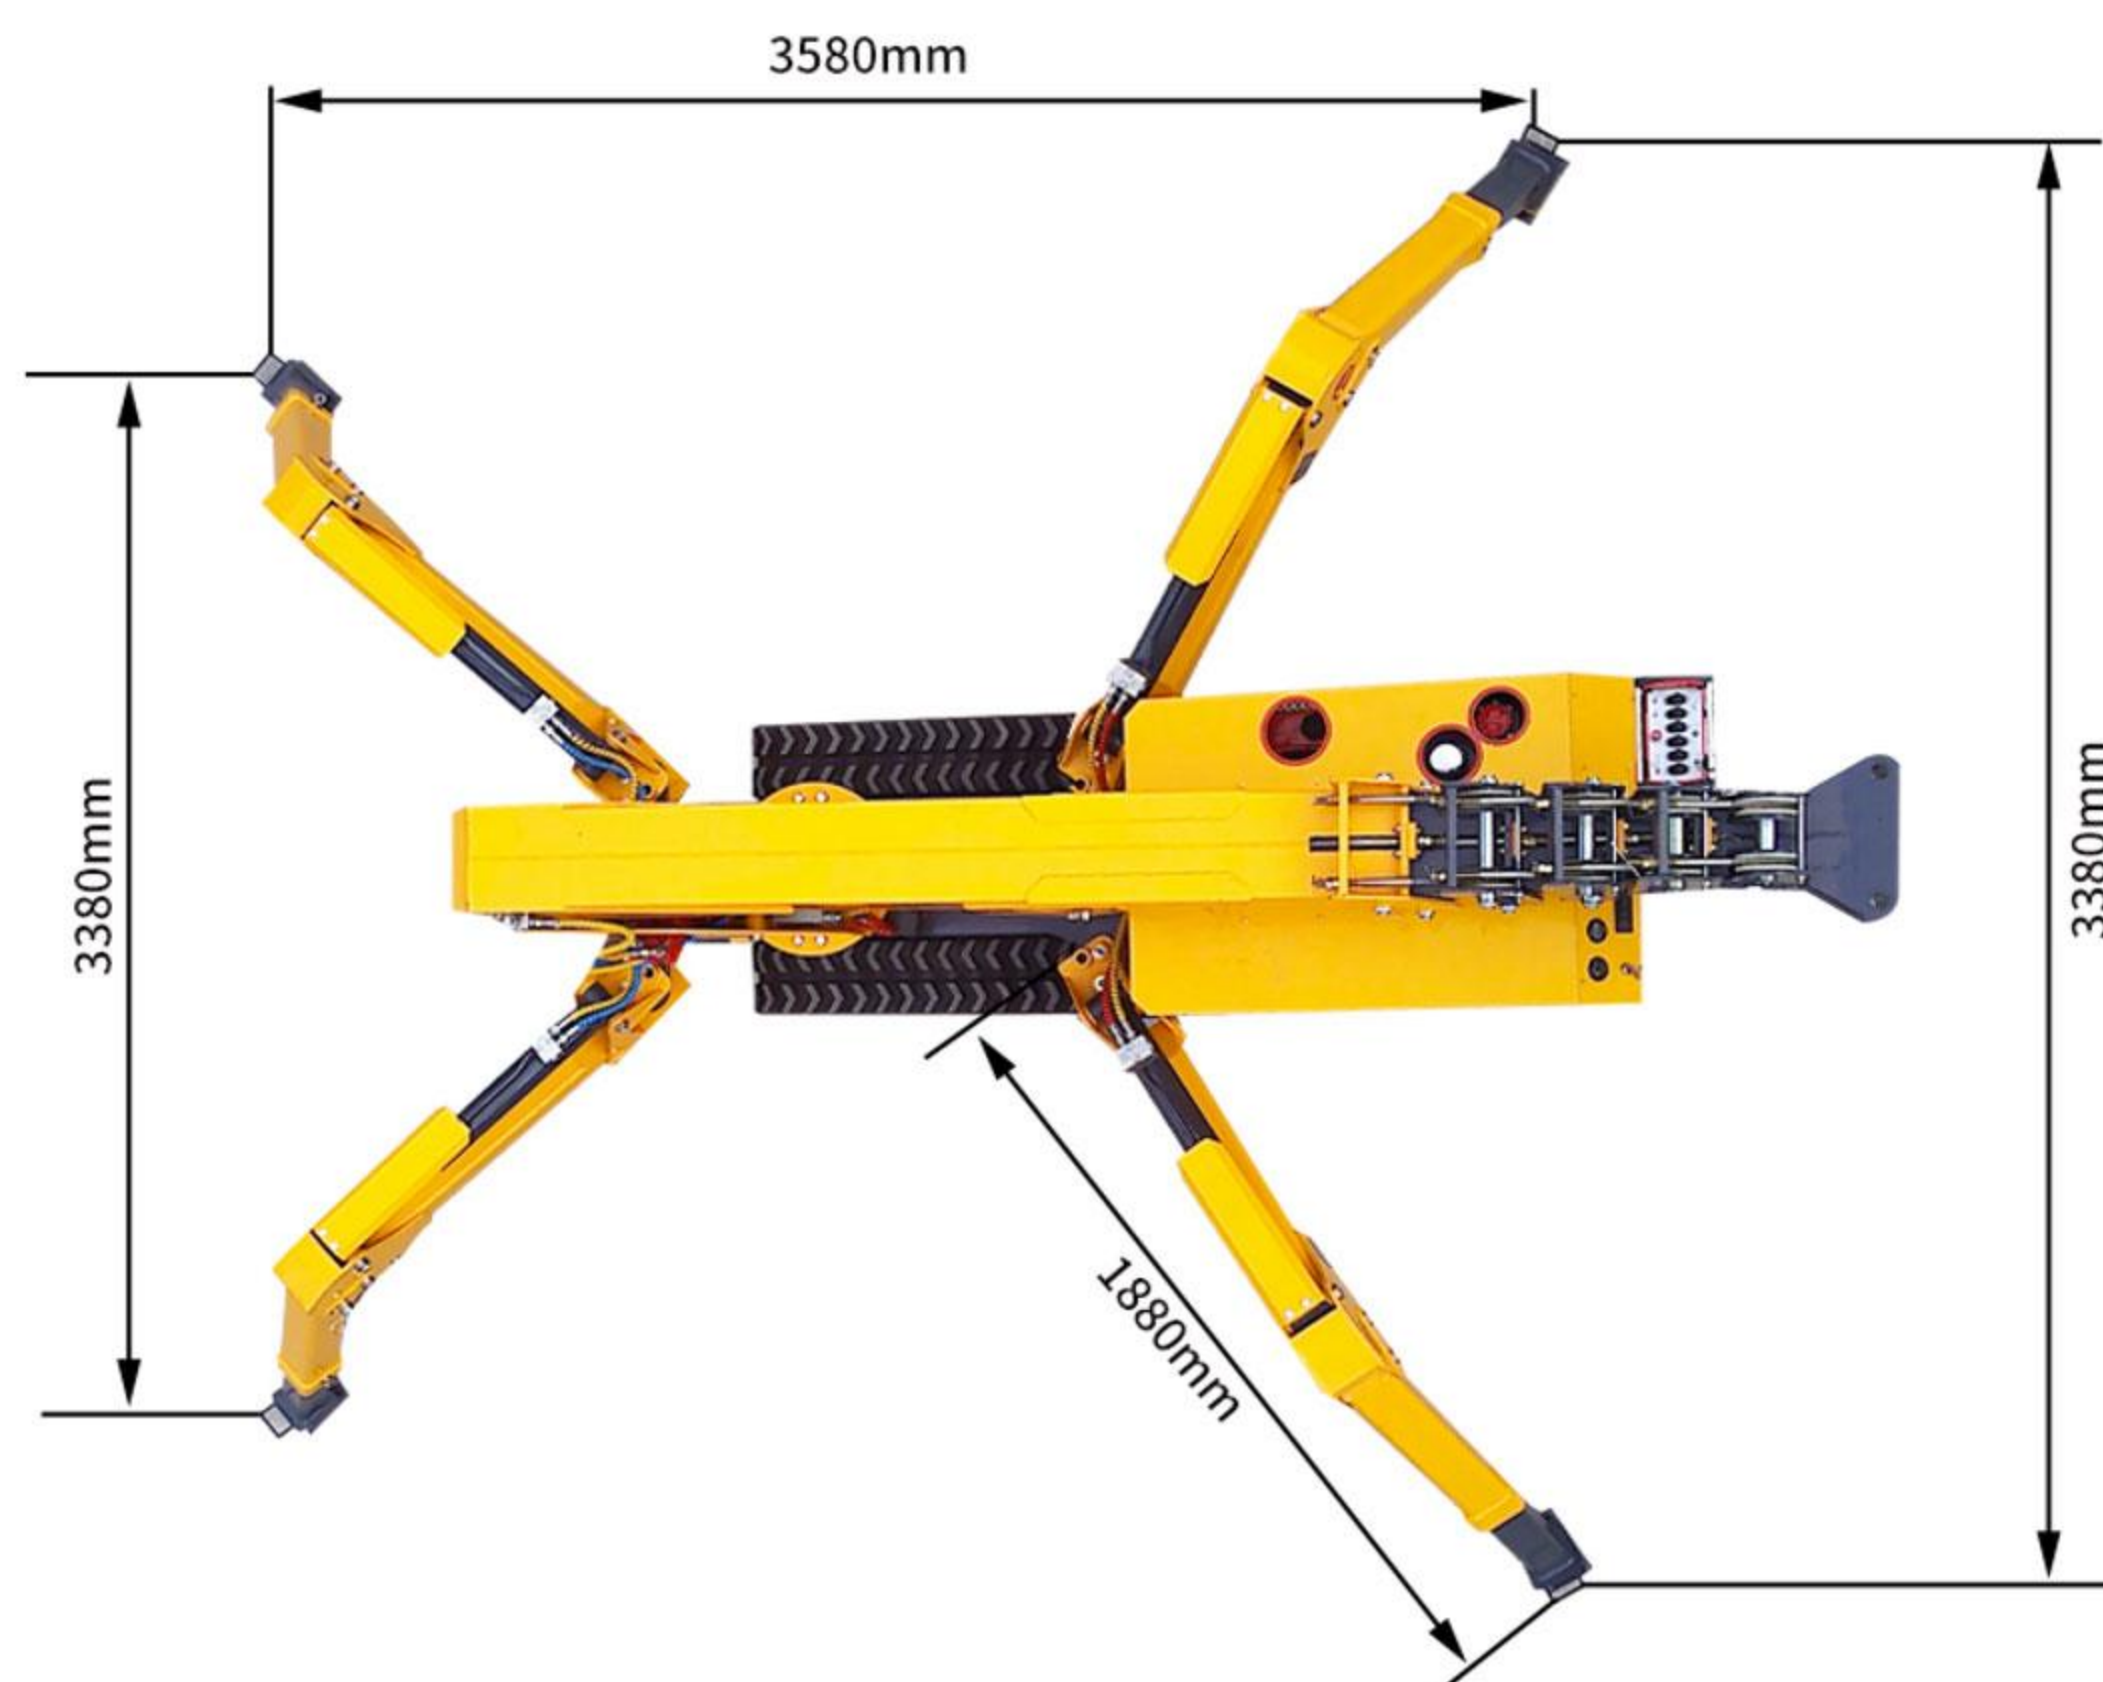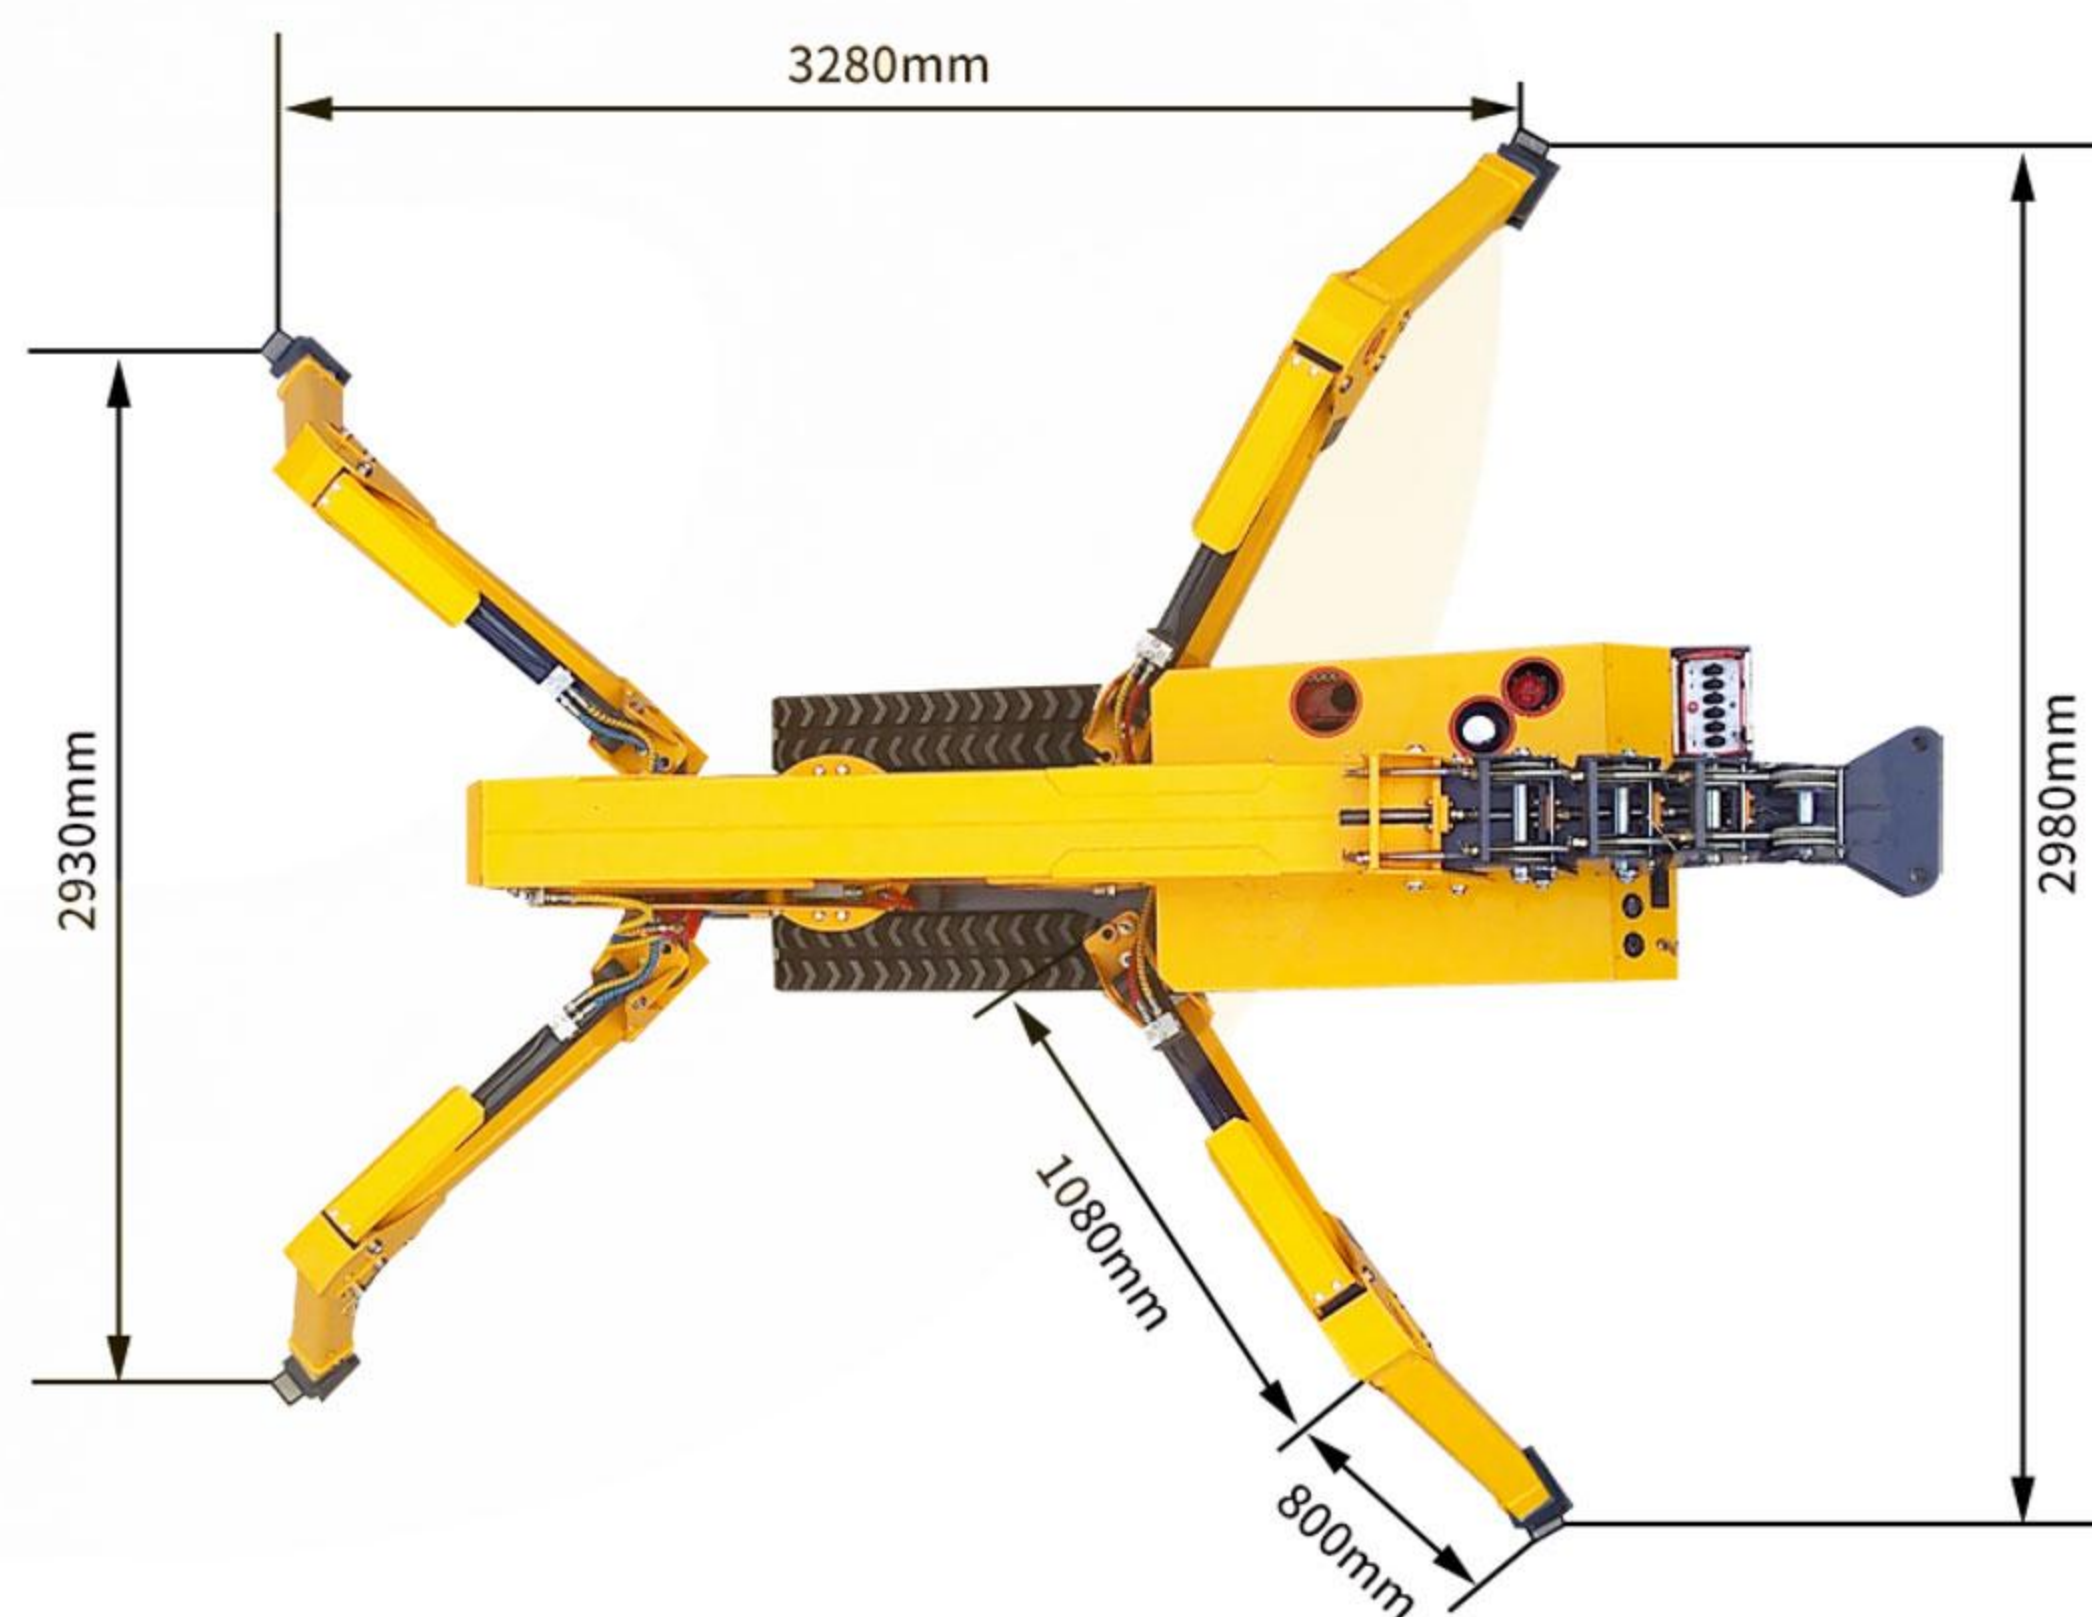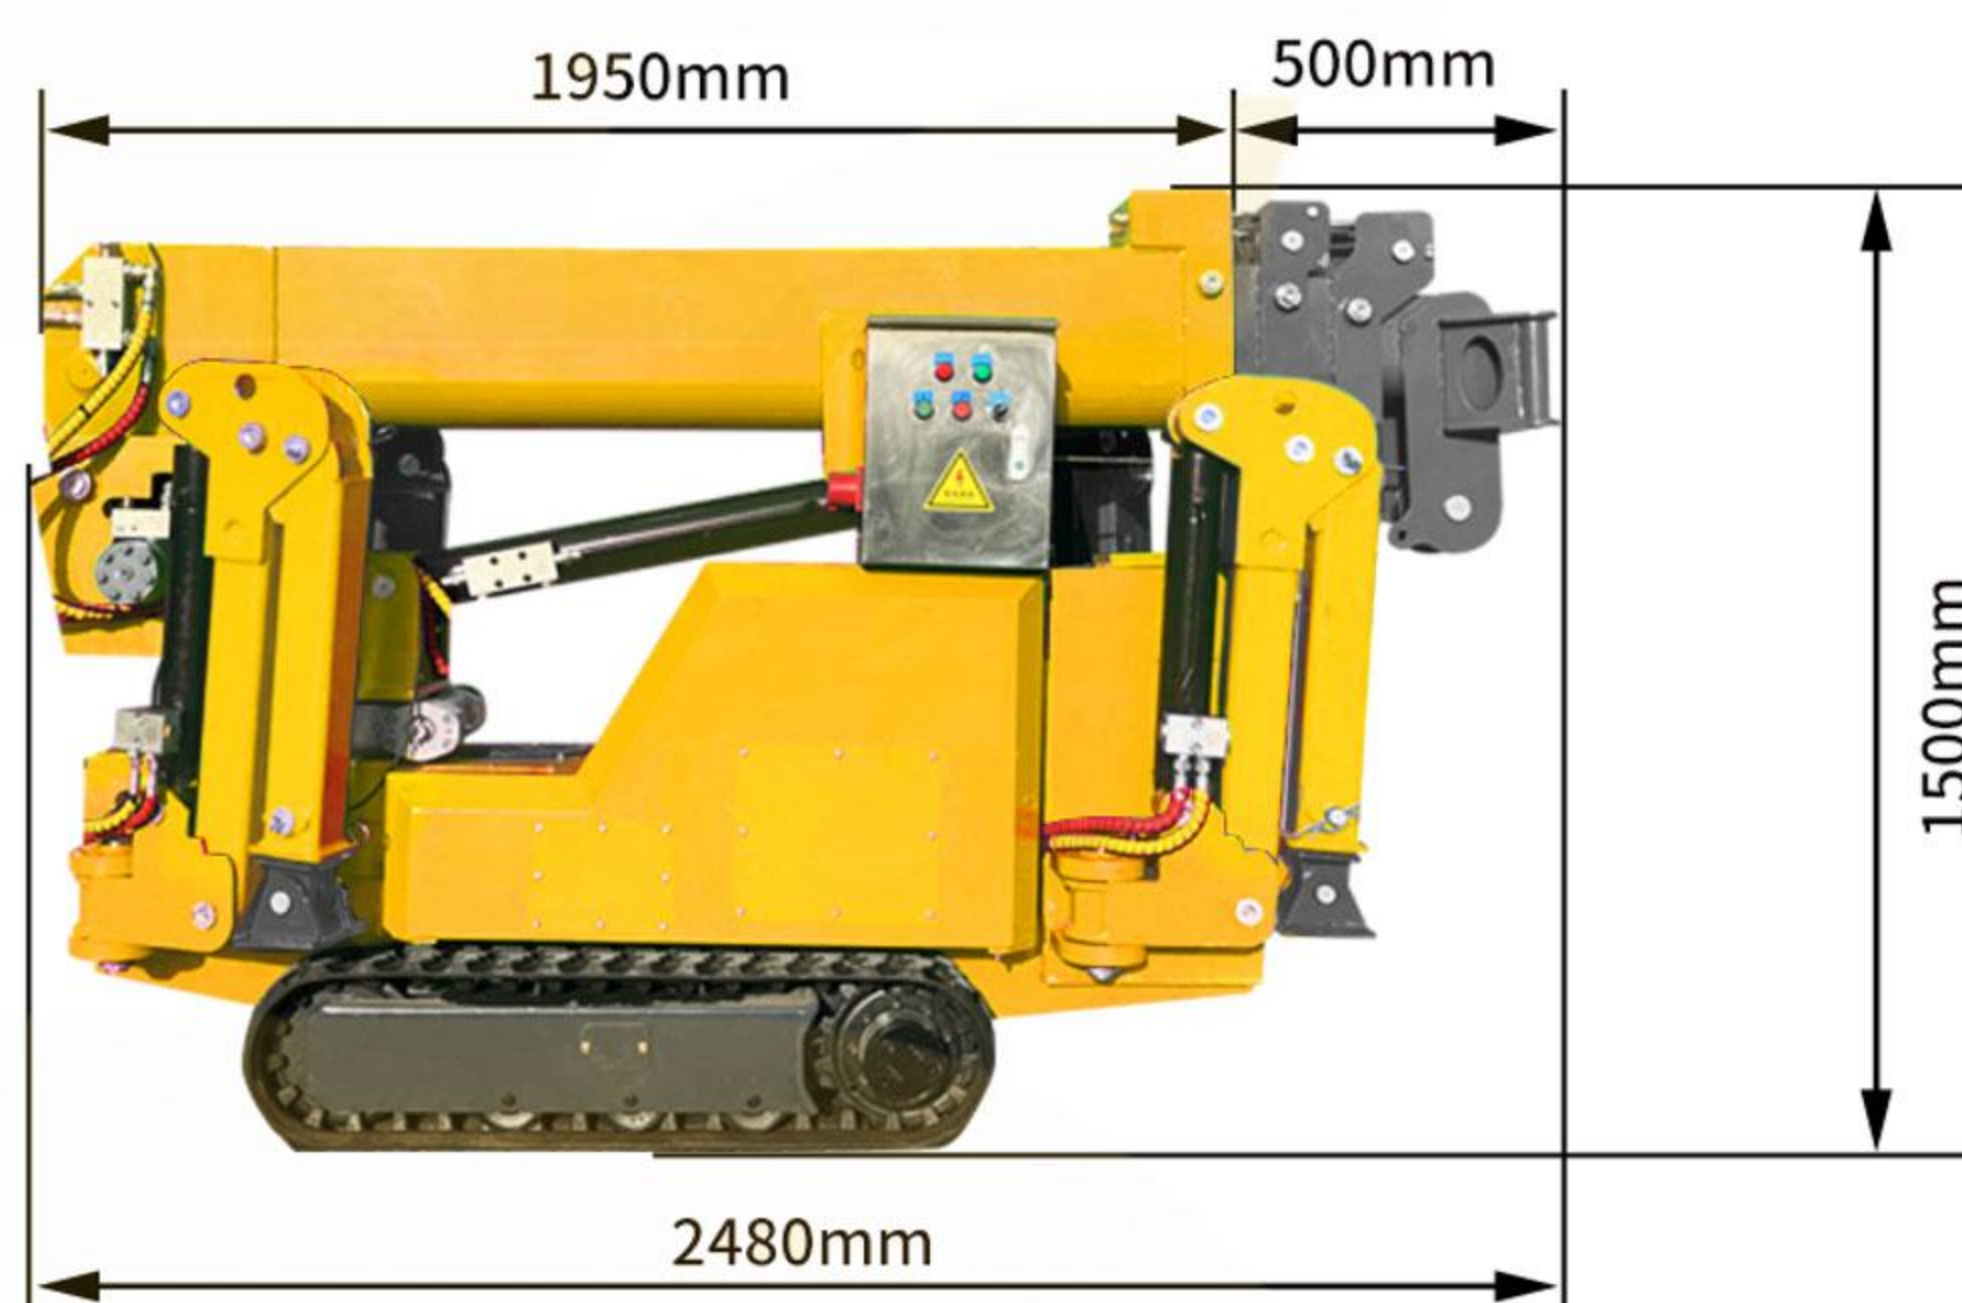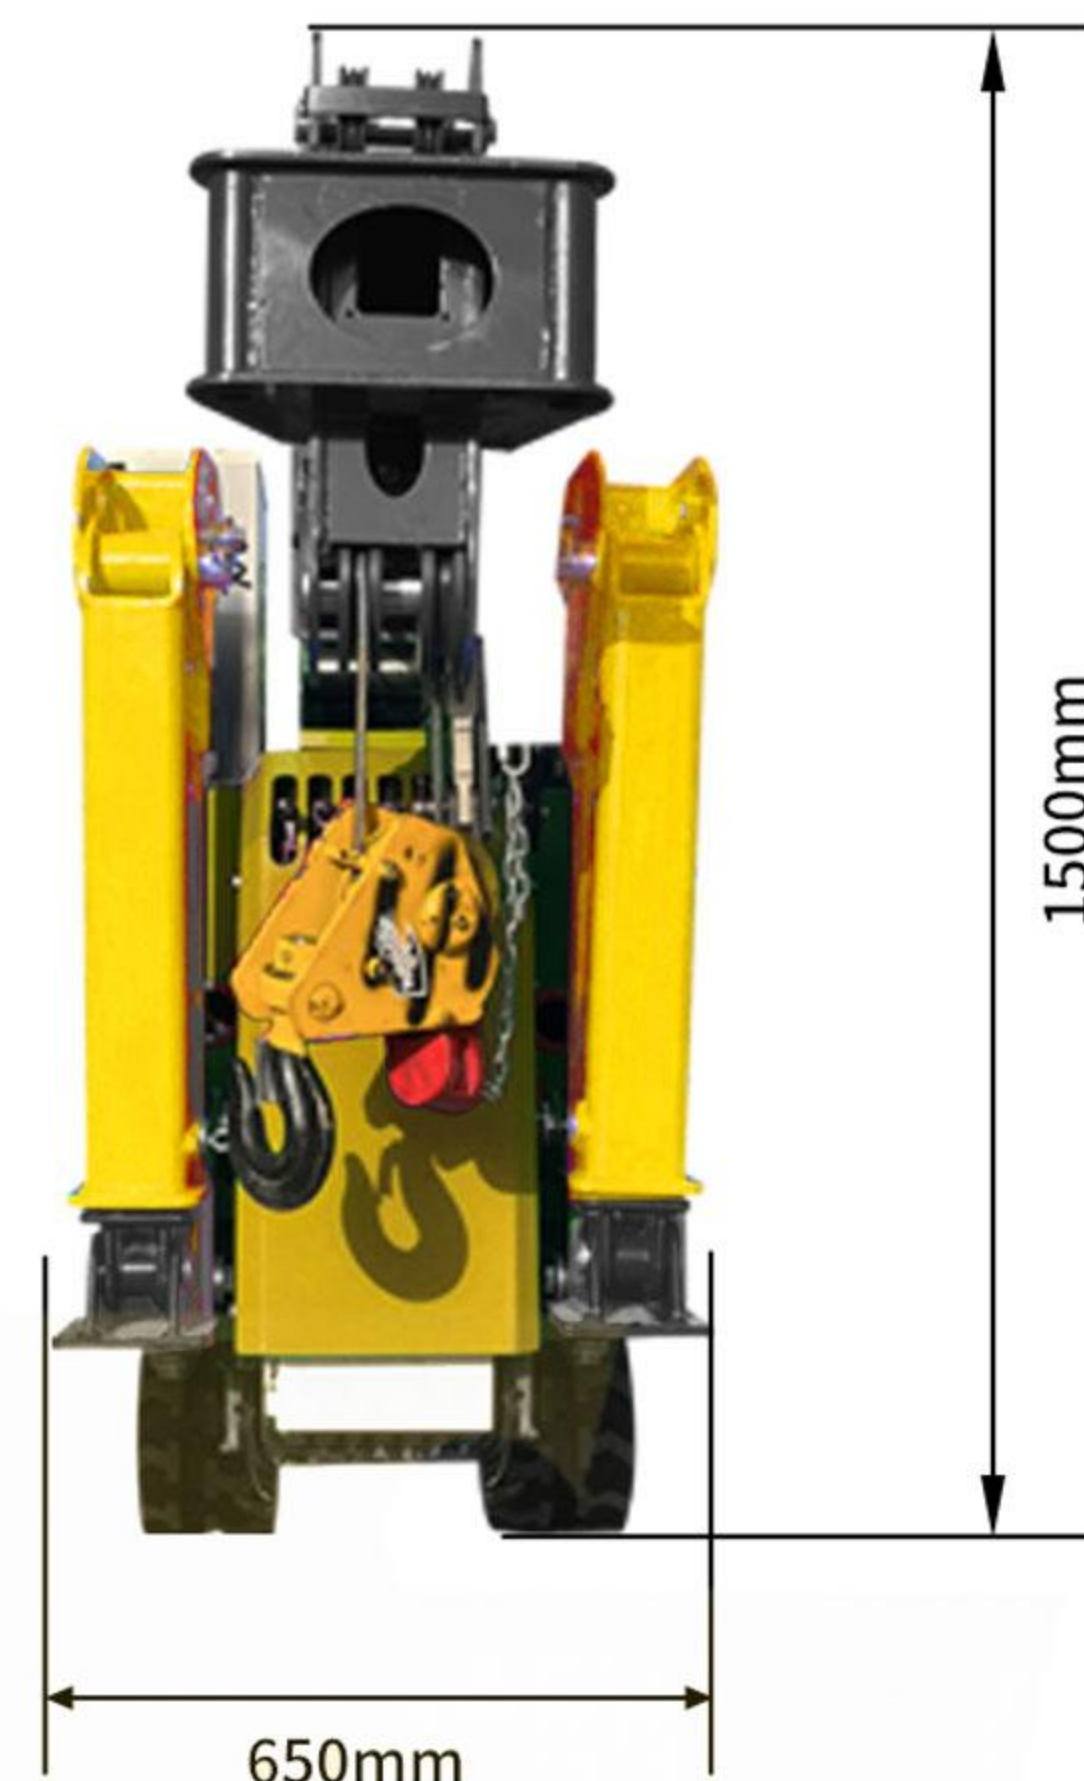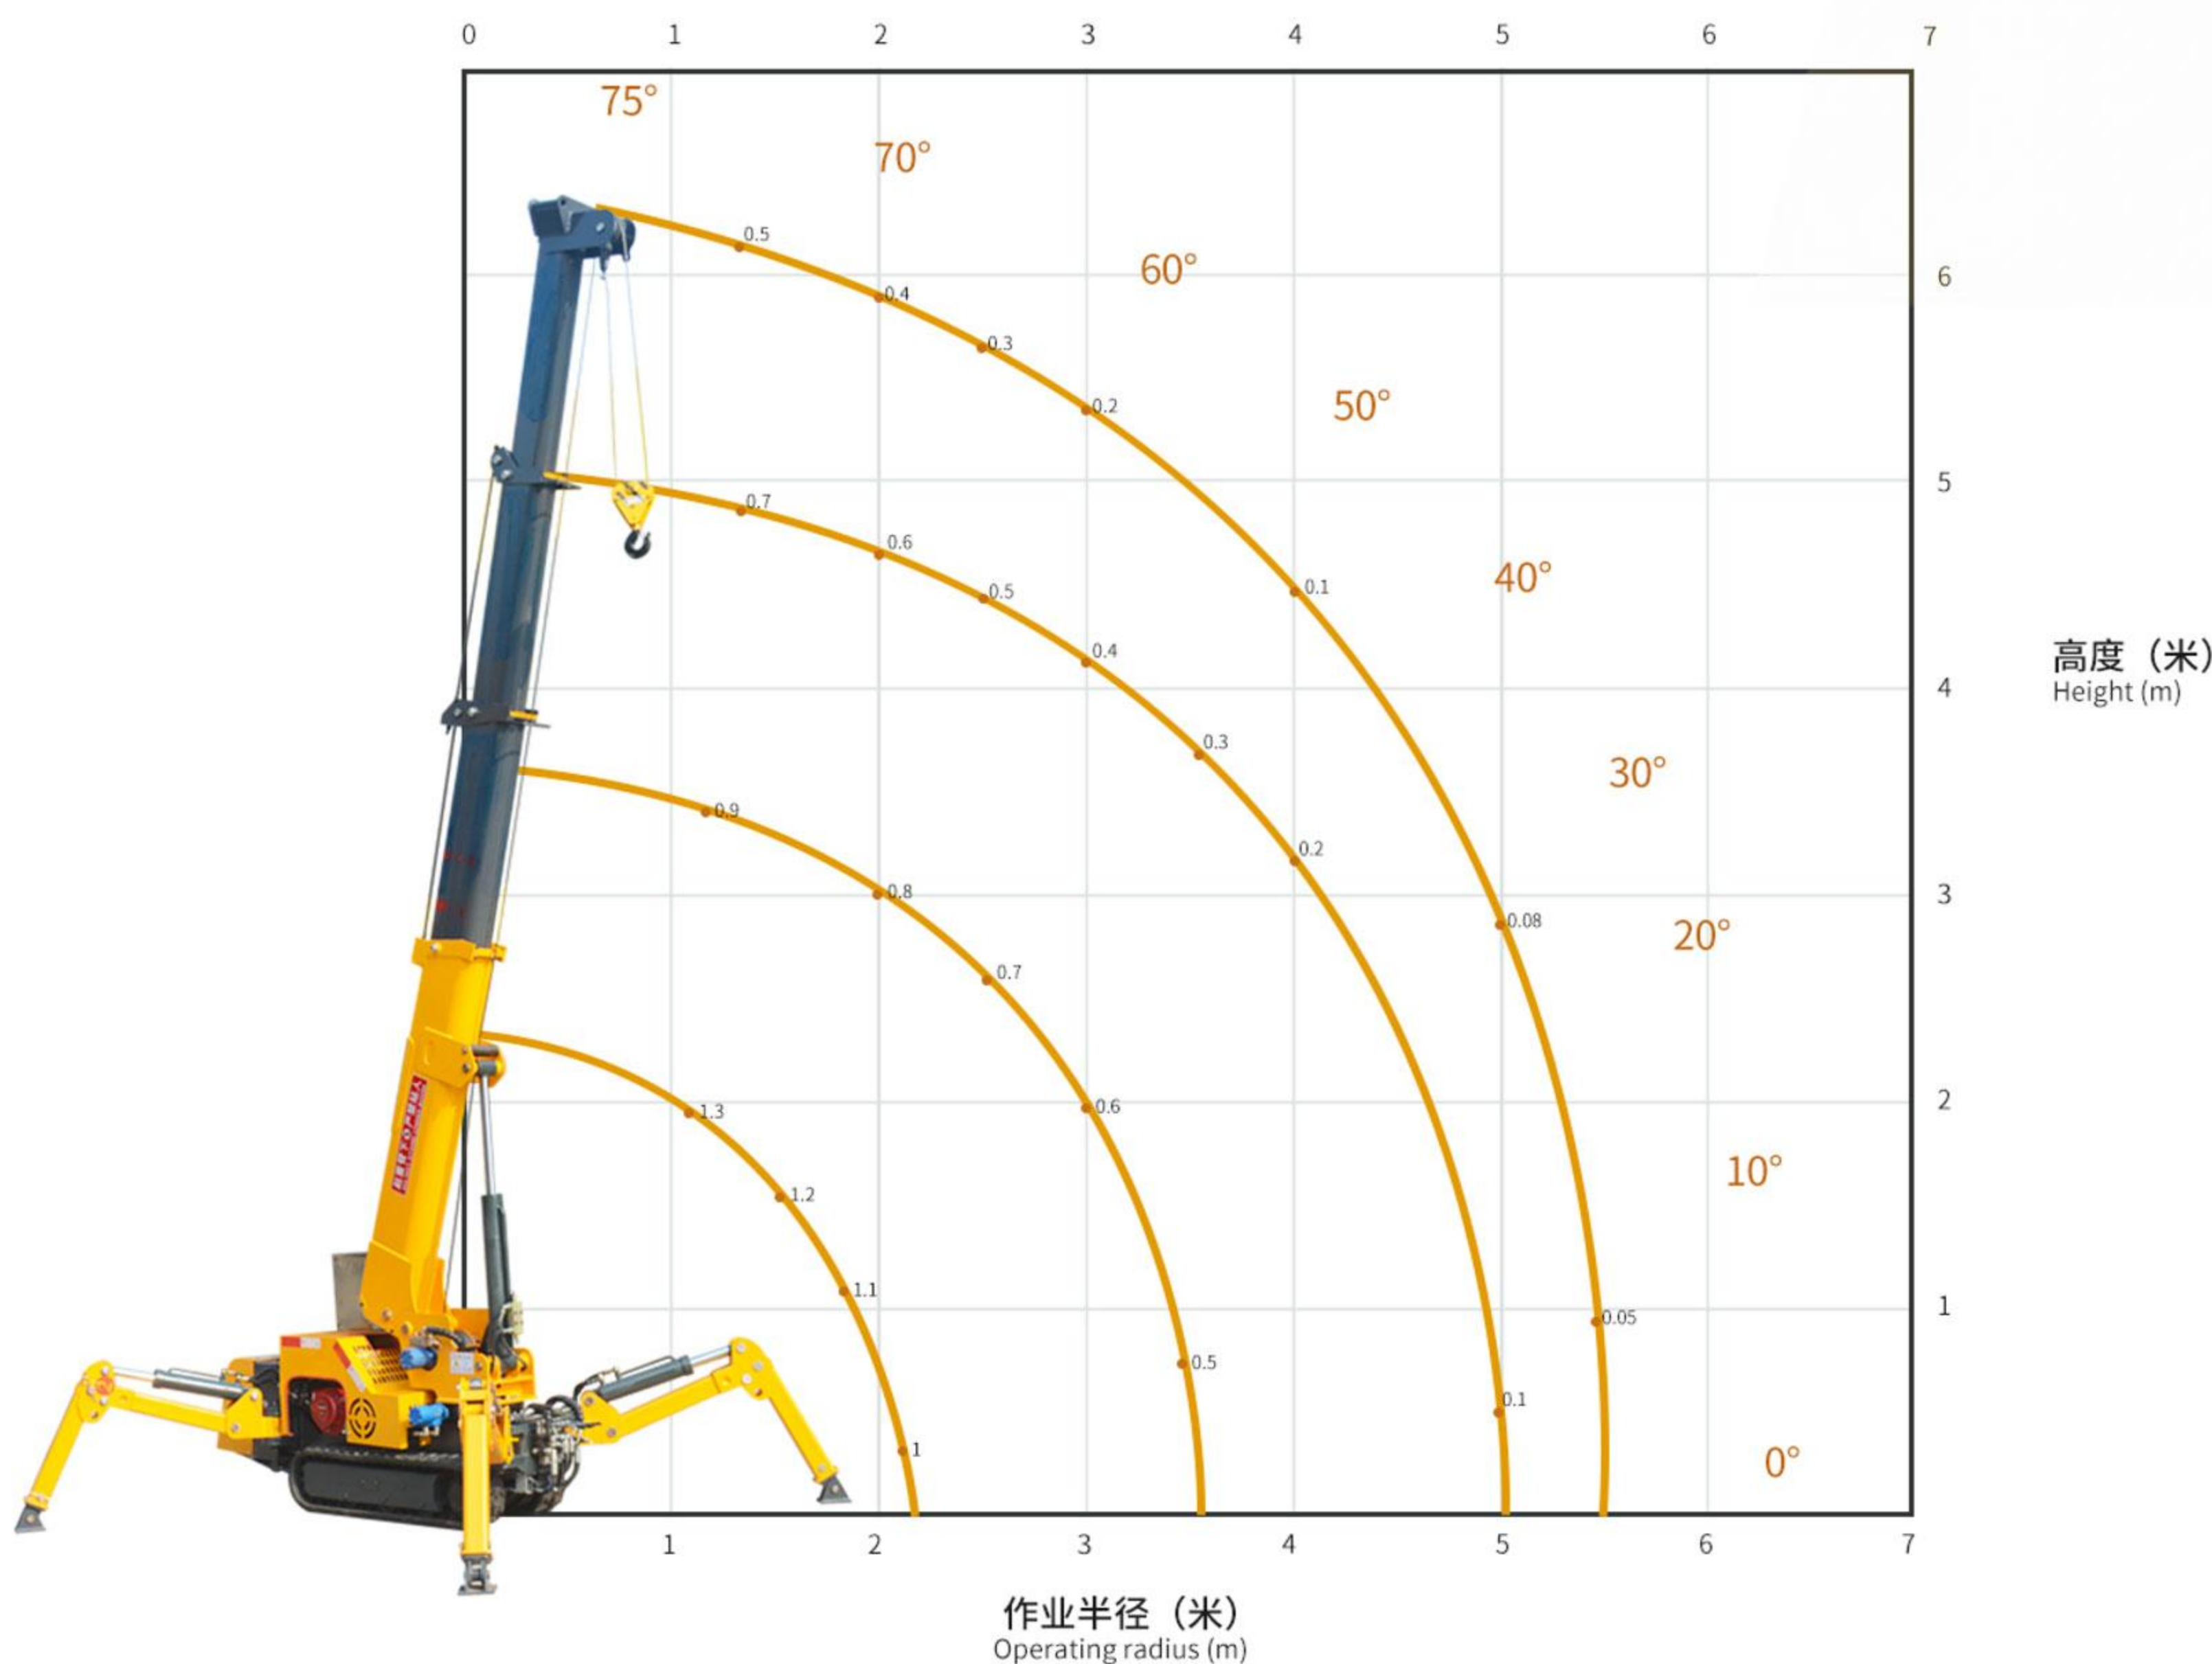


1.2吨蜘蛛吊机参数

1.2-ton Crawler Spider Crane

1.2T蜘蛛吊机 1.2T spider crane				
● 自重 (T) dead-weight (T)		1.3T	● 电机 Electrical Machinery	● 电压 voltage AC380V
● 最大作业半径 Maximum operating radius		5.35m	● 发动机 engine	● 生产方 Manufacturer 本田 (可定制/可选配其他品牌) Honda (customizable/optional for other brands)
● 最大地上扬程 Maximum ground lift		6.3m		● 型号 model number 390CC
● 卷扬装置 Winch device	● 吊钩上升速度 Hook lifting speed	0-8m/min (4绳) 0-8m/min (4 ropes)		● 启动方式 start mode 电启动/手动 Electric start/manual
	● 钢丝绳规格 Specification of steel wire rope	Φ 8mm*45m		● 启动性能 start performance -50°C-45°C
● 伸缩装置 Telescopic device	● 吊臂形式 Boom form	2m×4段吊臂 (可定制) 2m×4-section lifting arm (Support customization)		● 燃油/容积 Fuel/Volume 汽油/6L Gasoline/6L
	● 吊臂长/时间 Boom length/time	2.5m-6.3m/20sec	● 电池容量 Battery capacity 12v 45AH	
● 变幅装置 Luffing device	● 吊臂角度/时间 Boom angle/time	0-78°/13sec	● 燃油消耗率 Fuel consumption rate 274g/kW-h	● 噪声等级 noise level 额定转速≤81.5dBA (1m) Rated speed ≤ 81.5dBA (1m)
● 回旋装置 gyroscope	● 回转角度/速度 Rotation angle/speed	0-360°(连续) /60sec 0-360 ° (continuous)/60sec	● 操作系统 operating system	● 操作种类(吊臂/支腿)手动行走 Operation type (boom/leg), manual walking 手动操作、手动行走 (可选遥控操作) Manual operation, manual travel (optional remote control operation)
● 支腿 Outrigger	● 支腿动作形式 Outrigger movement form	手动旋出+油压自动支撑(三节支腿可伸缩) Manual screw-out + hydraulic automatic support (three-section legs retractable)		● 操作特性 Operational Characteristics 手动操作 (可选遥控操作) Manual operation (remote operation optional)
	● 最大伸出幅度 (mm) Maximum extension amplitude (mm)	3580 (长) X3380 (后) X3380 (前) 3580 (long) X3380 (rear) X3380 (front)		
● 行走装置 running gear	● 行走方式 Walking mode	液压驱动 hydraulic drive	● 标准配置 Standard configuration	汽油机可更换柴油机 Gasoline engines can be replaced with diesel engines
	● 行走速度 Walking speed	0-2.5km/h	● 整车尺寸 Vehicle Size	长2.48米 宽0.65米 高1.5米 2.48meters length, 0.65meters width, and 1.5 meters height
	● 爬坡能力 Gradeability	25°(36%)	● 履带(mm) Track (mm)	180(宽)72(节距)37(节) 180 (width) 72 (pitch) 37 (section)
● 可选装 Optional 可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black				

1.2T蜘蛛吊润滑部位图

1.2T spider crane lubrication parts diagram

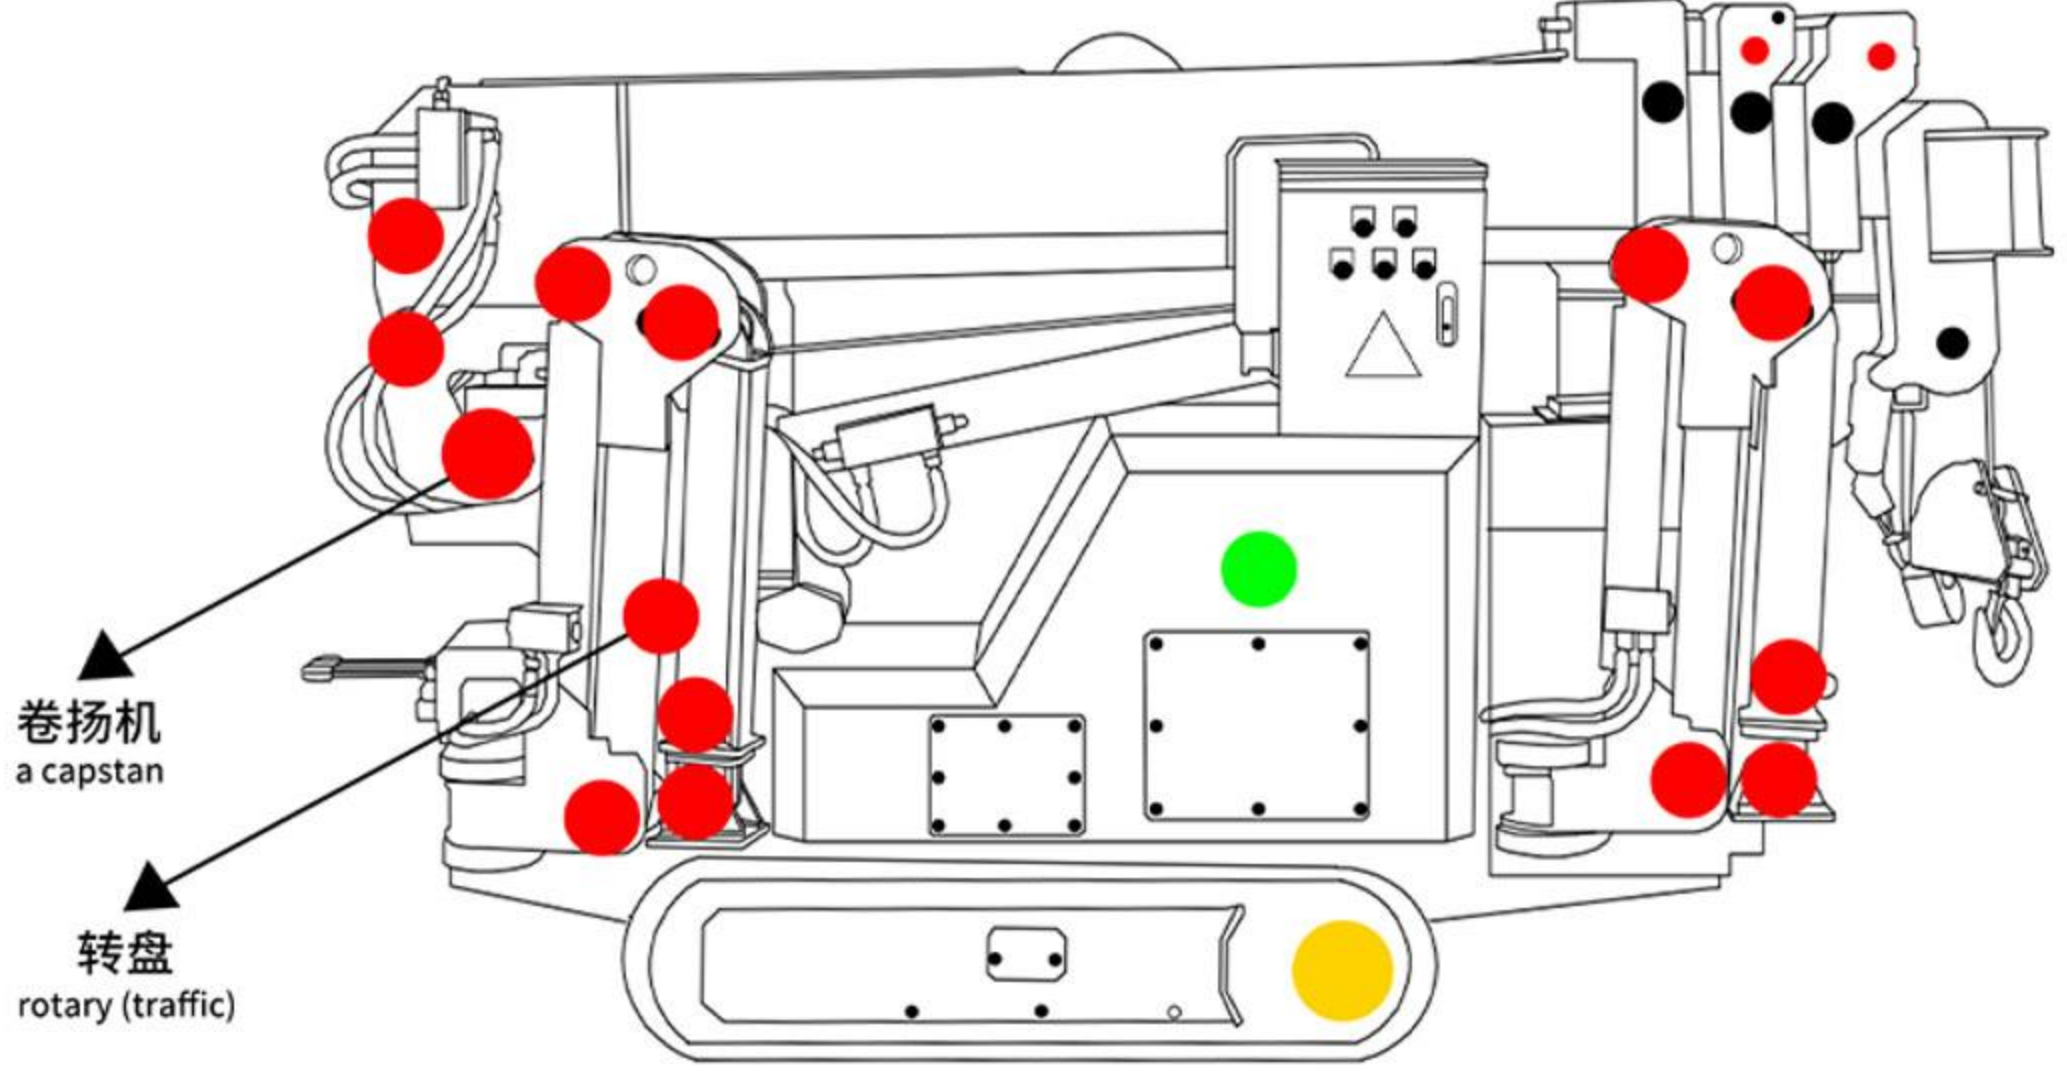

卷扬机
a capstan

转盘
rotary (traffic)

注:转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / “Whenever the jibs are out, grease the jibs.”

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.
本产品严禁雨淋



液压飞臂

Hydraulic Flying Arm



力矩显示器

Torque Indicator



吊篮

gondola (of cable car)




无线遥控器

wireless remote






1.5吨蜘蛛吊机 1.5-ton spider crane

● 性能特点 Performance Characteristics

- 体积小、自重轻、结构紧凑，广泛用于楼层楼顶吊装，变电站检修等小空间
- 橡胶履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 可加遥控装置 操作便捷
- Small size, light weight, compact structure, widely used in small space such as floor roof lifting, substation maintenance, etc.
- Rubber tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- Remote control can be added for easy operation

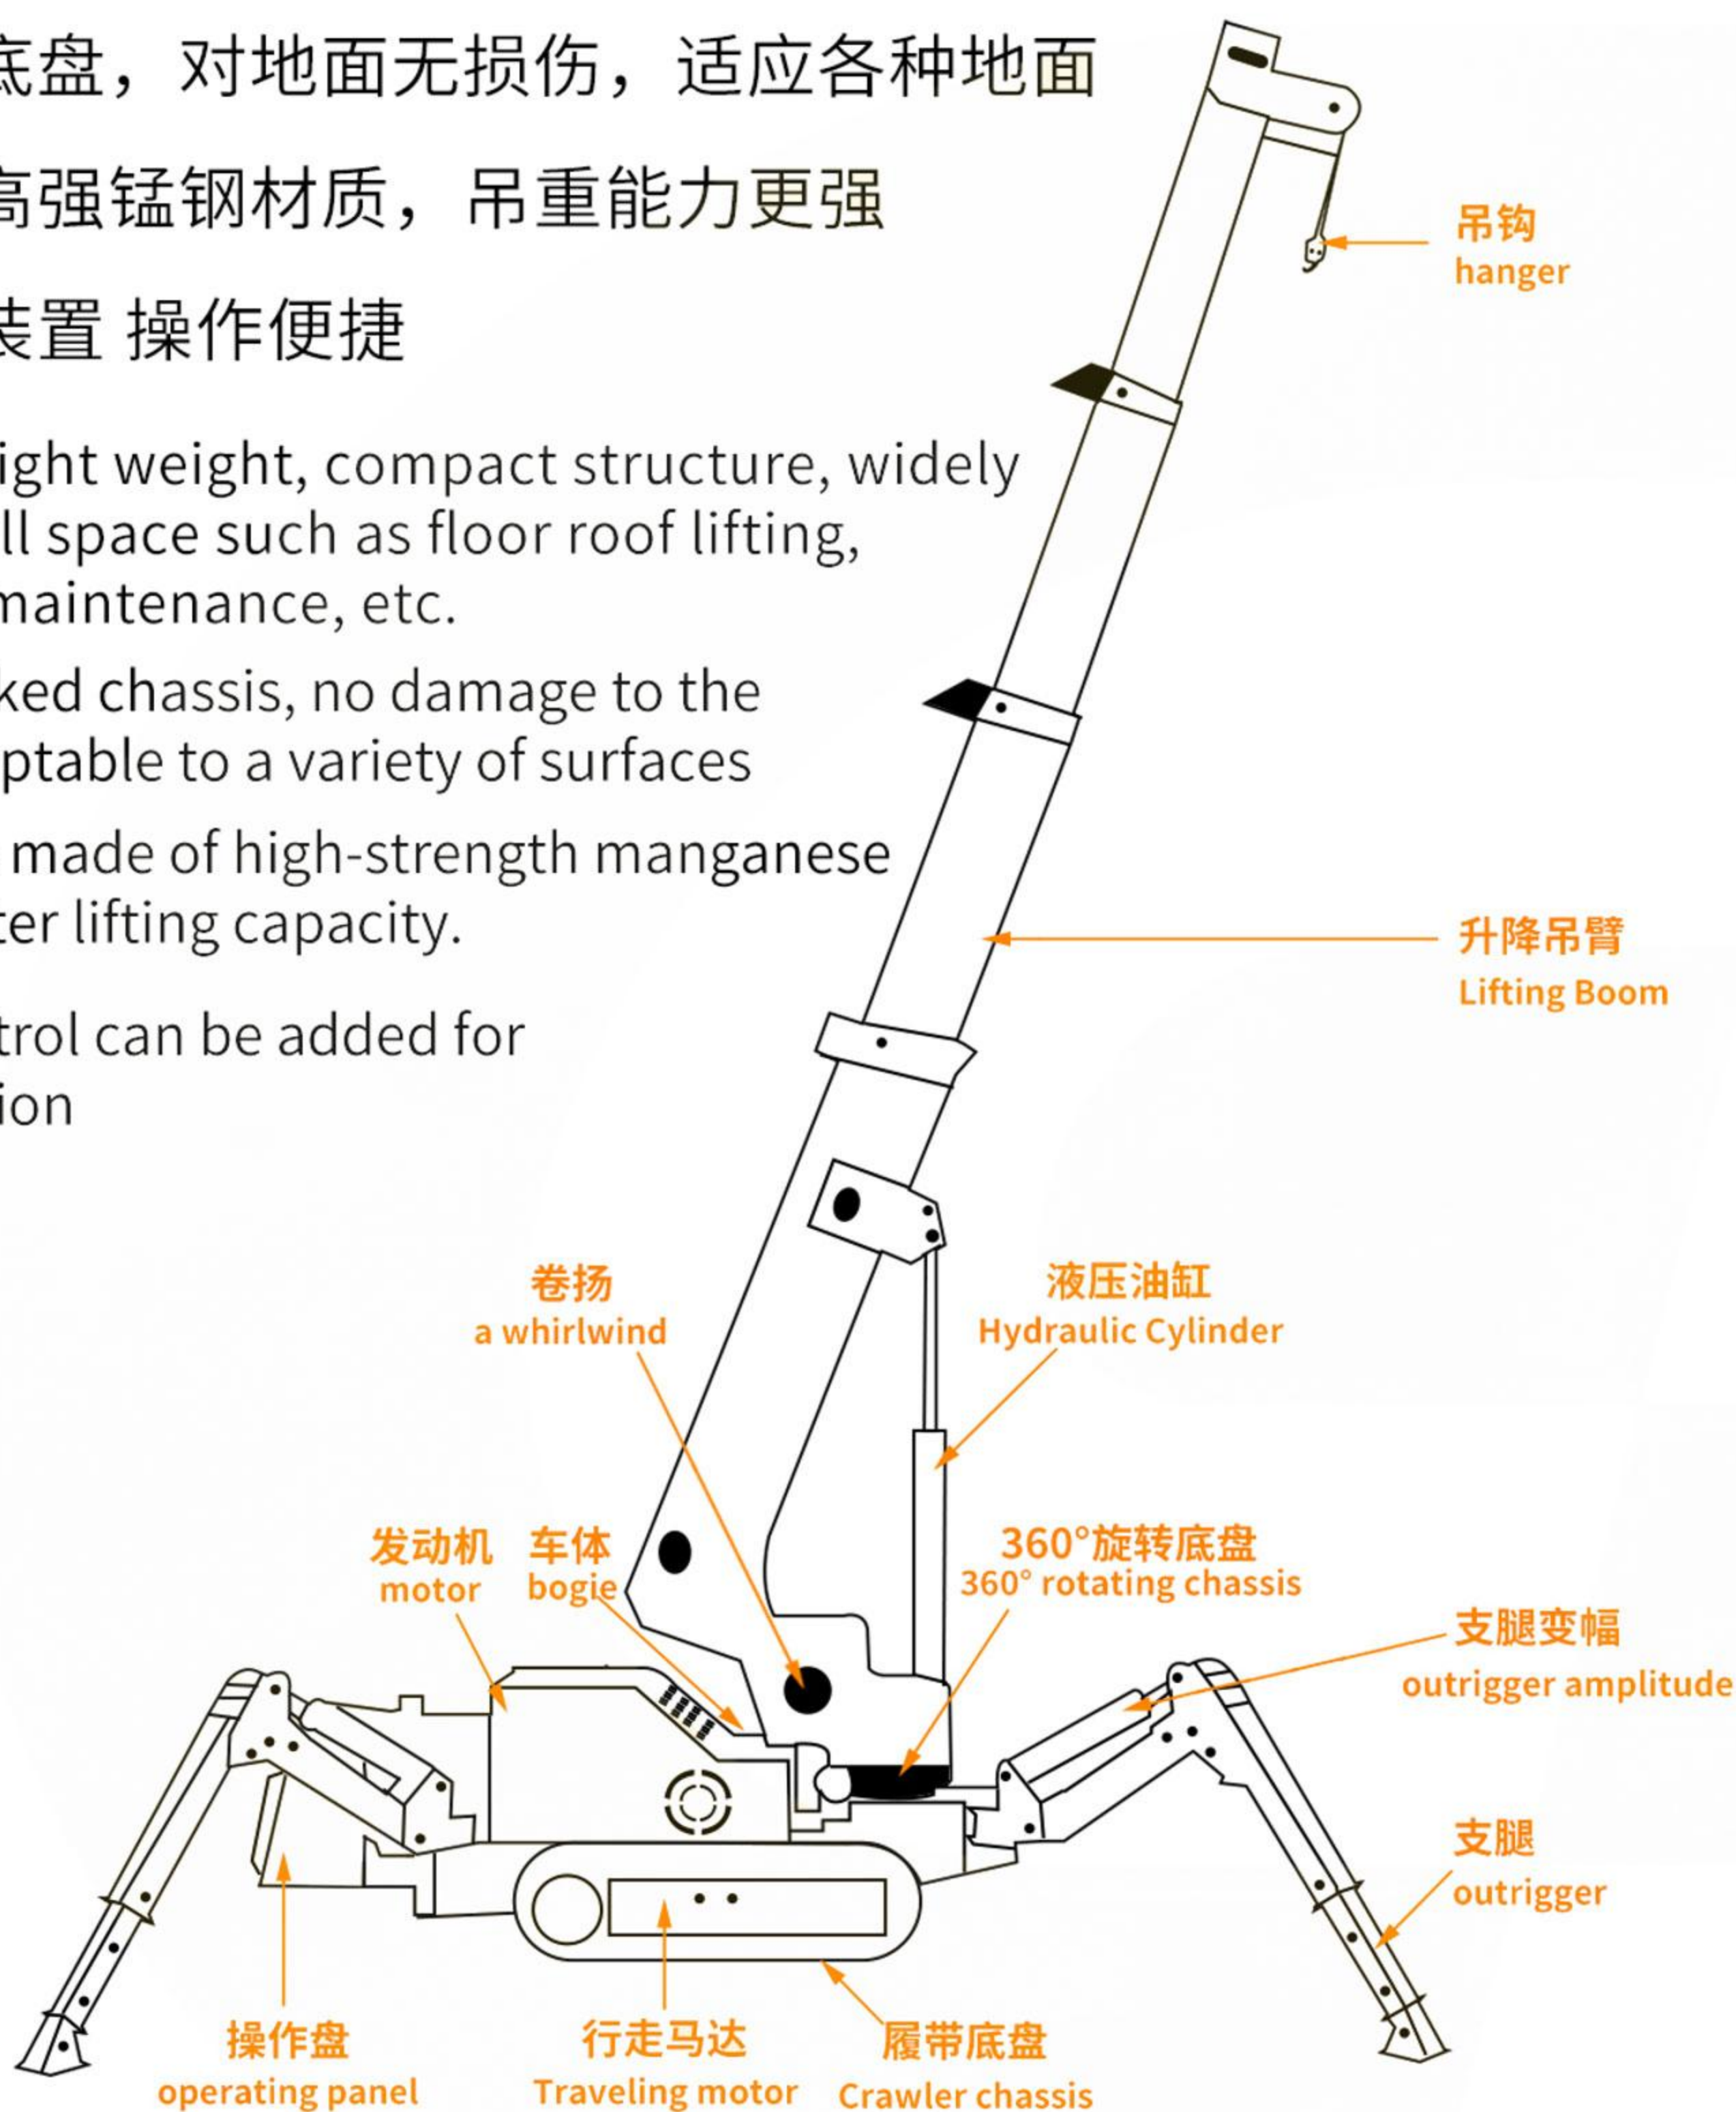

1.5吨蜘蛛吊吊重表
1.5 ton spider crane lifting weight chart

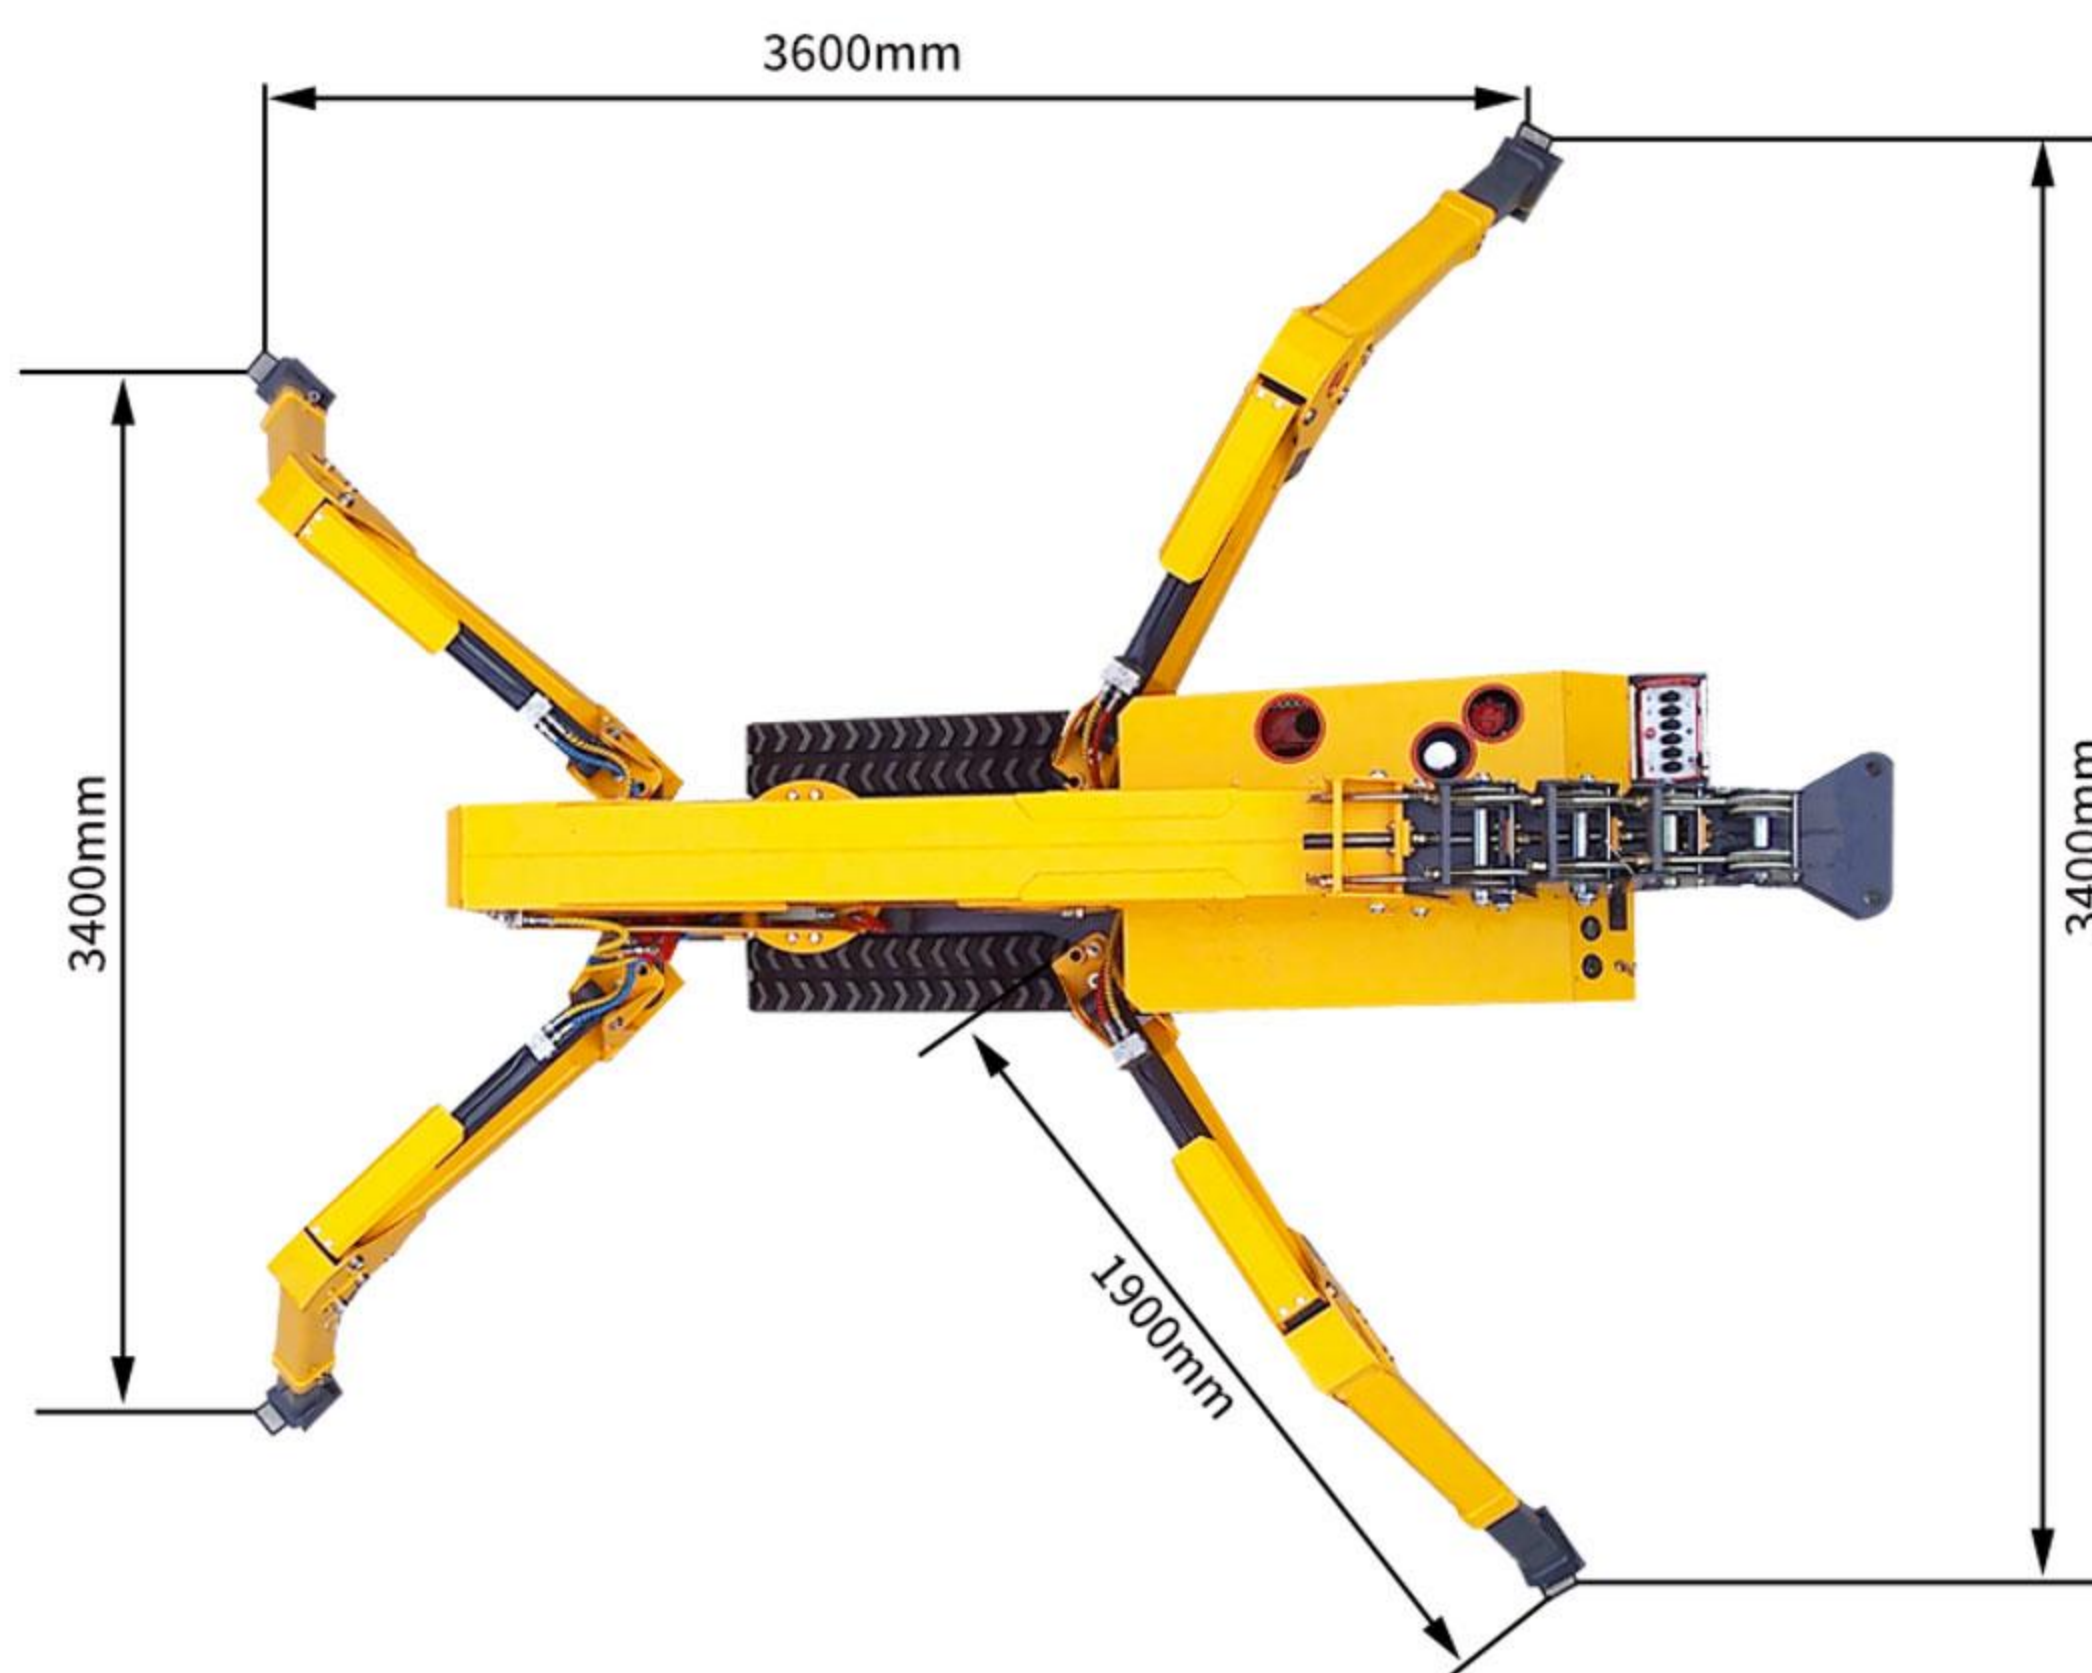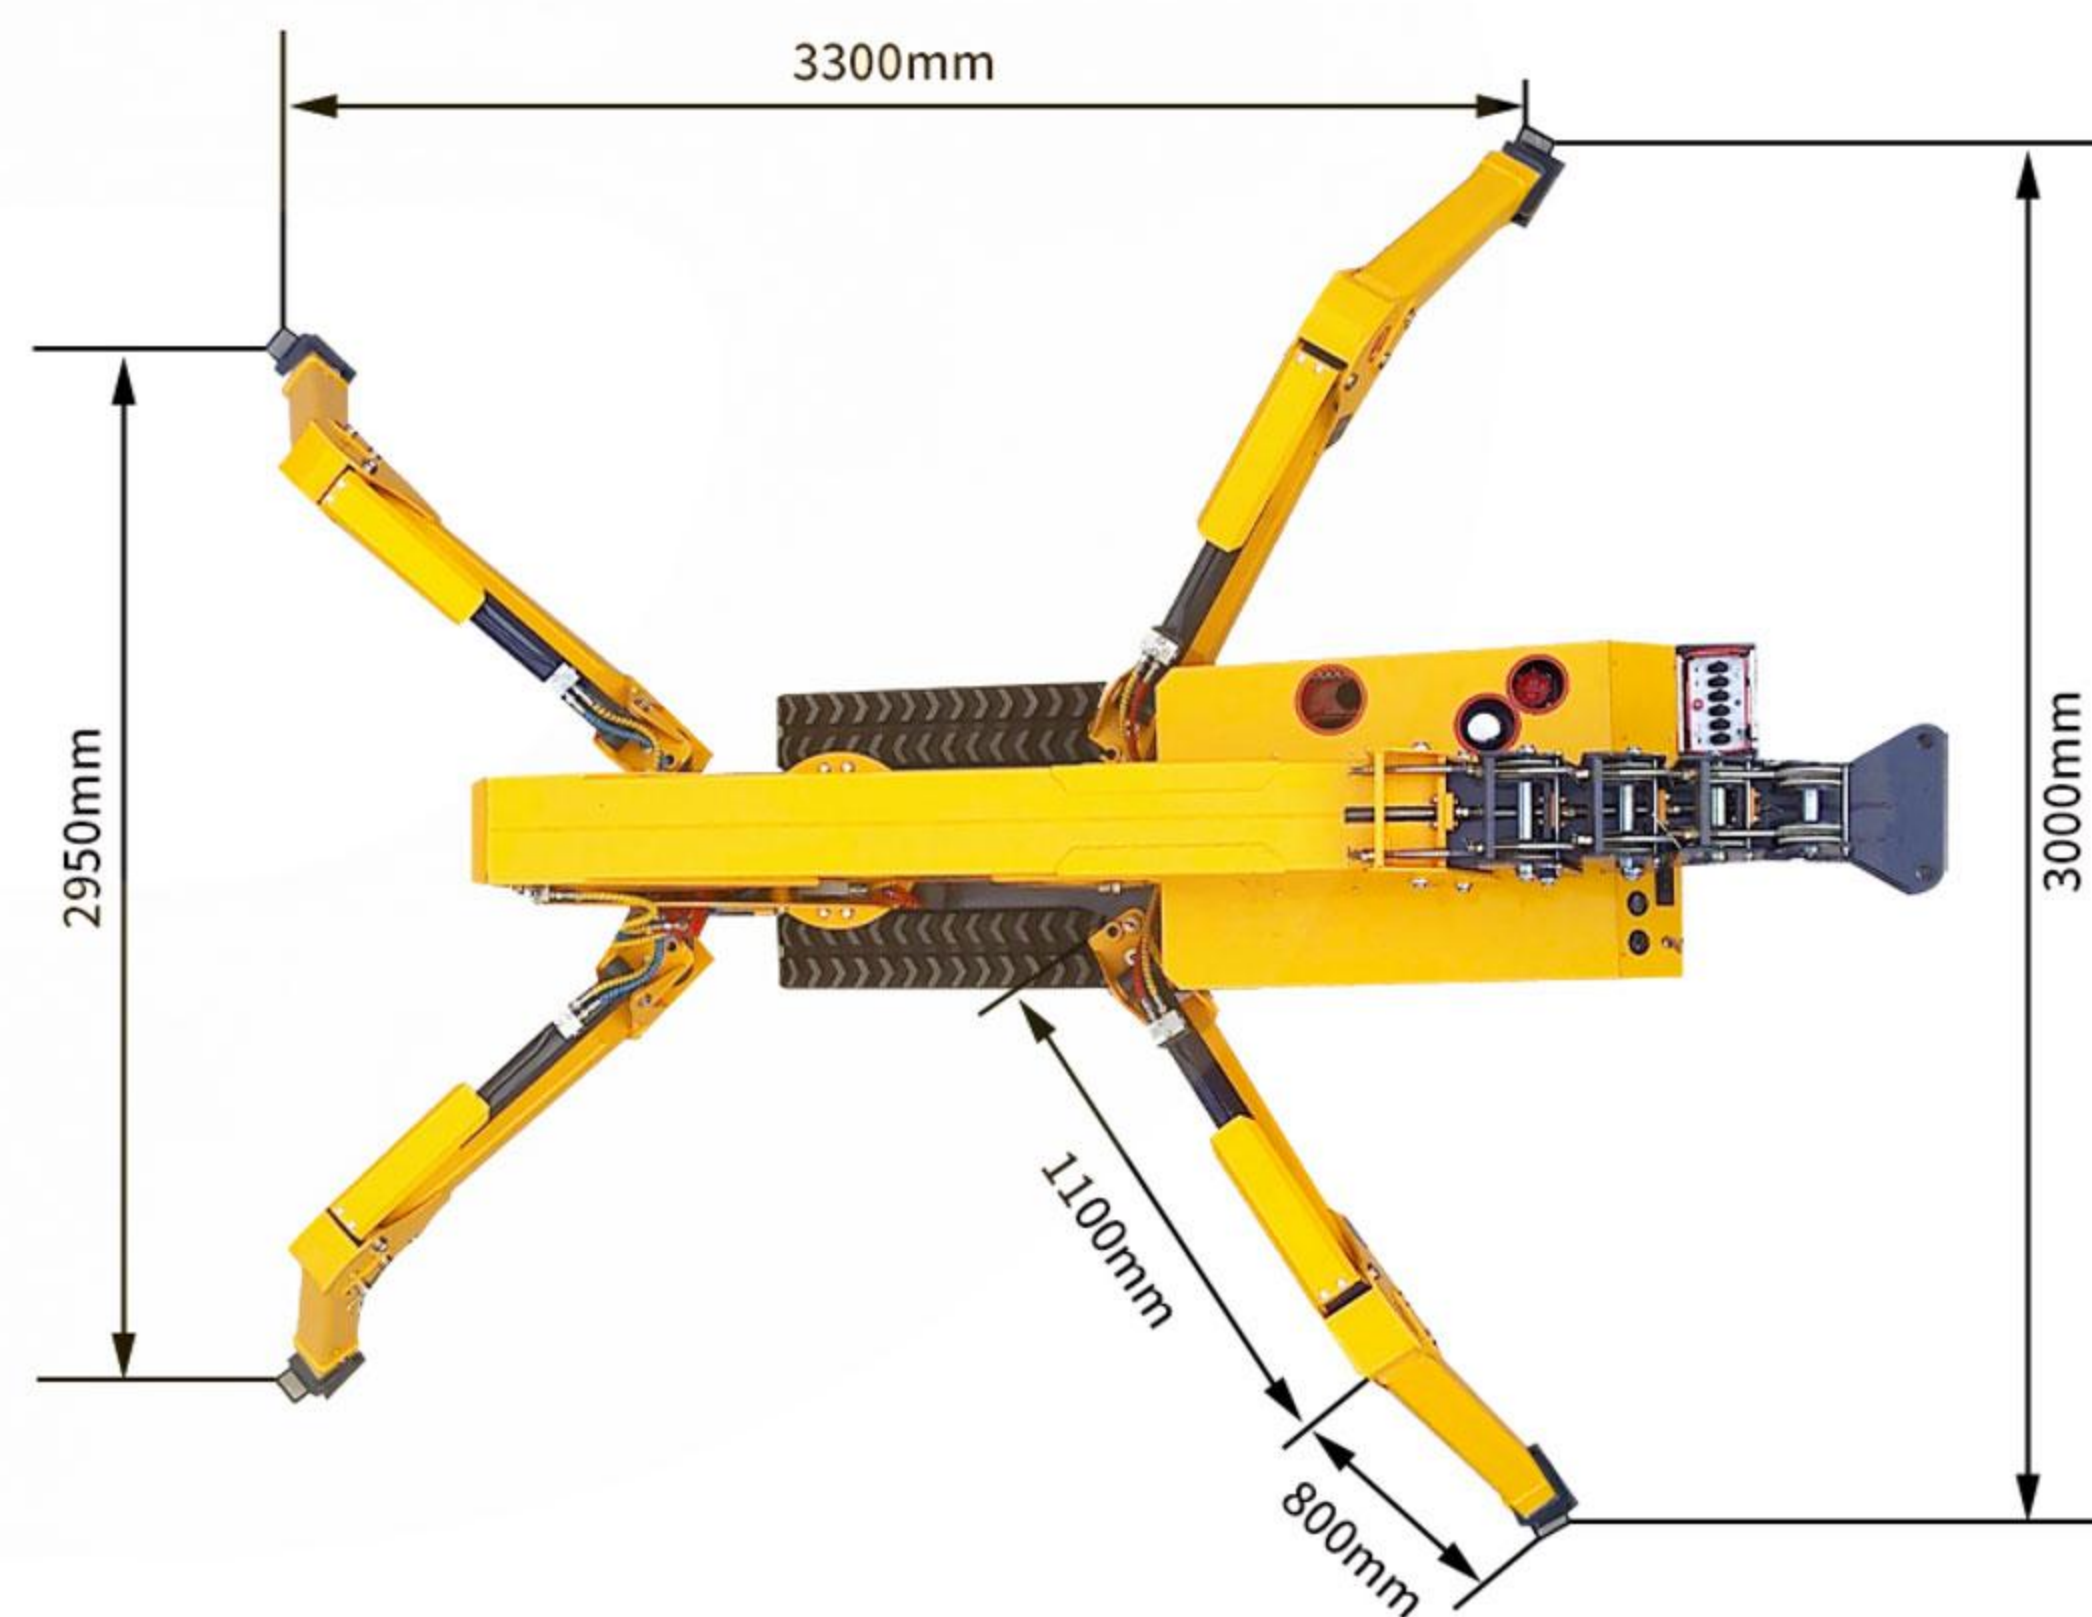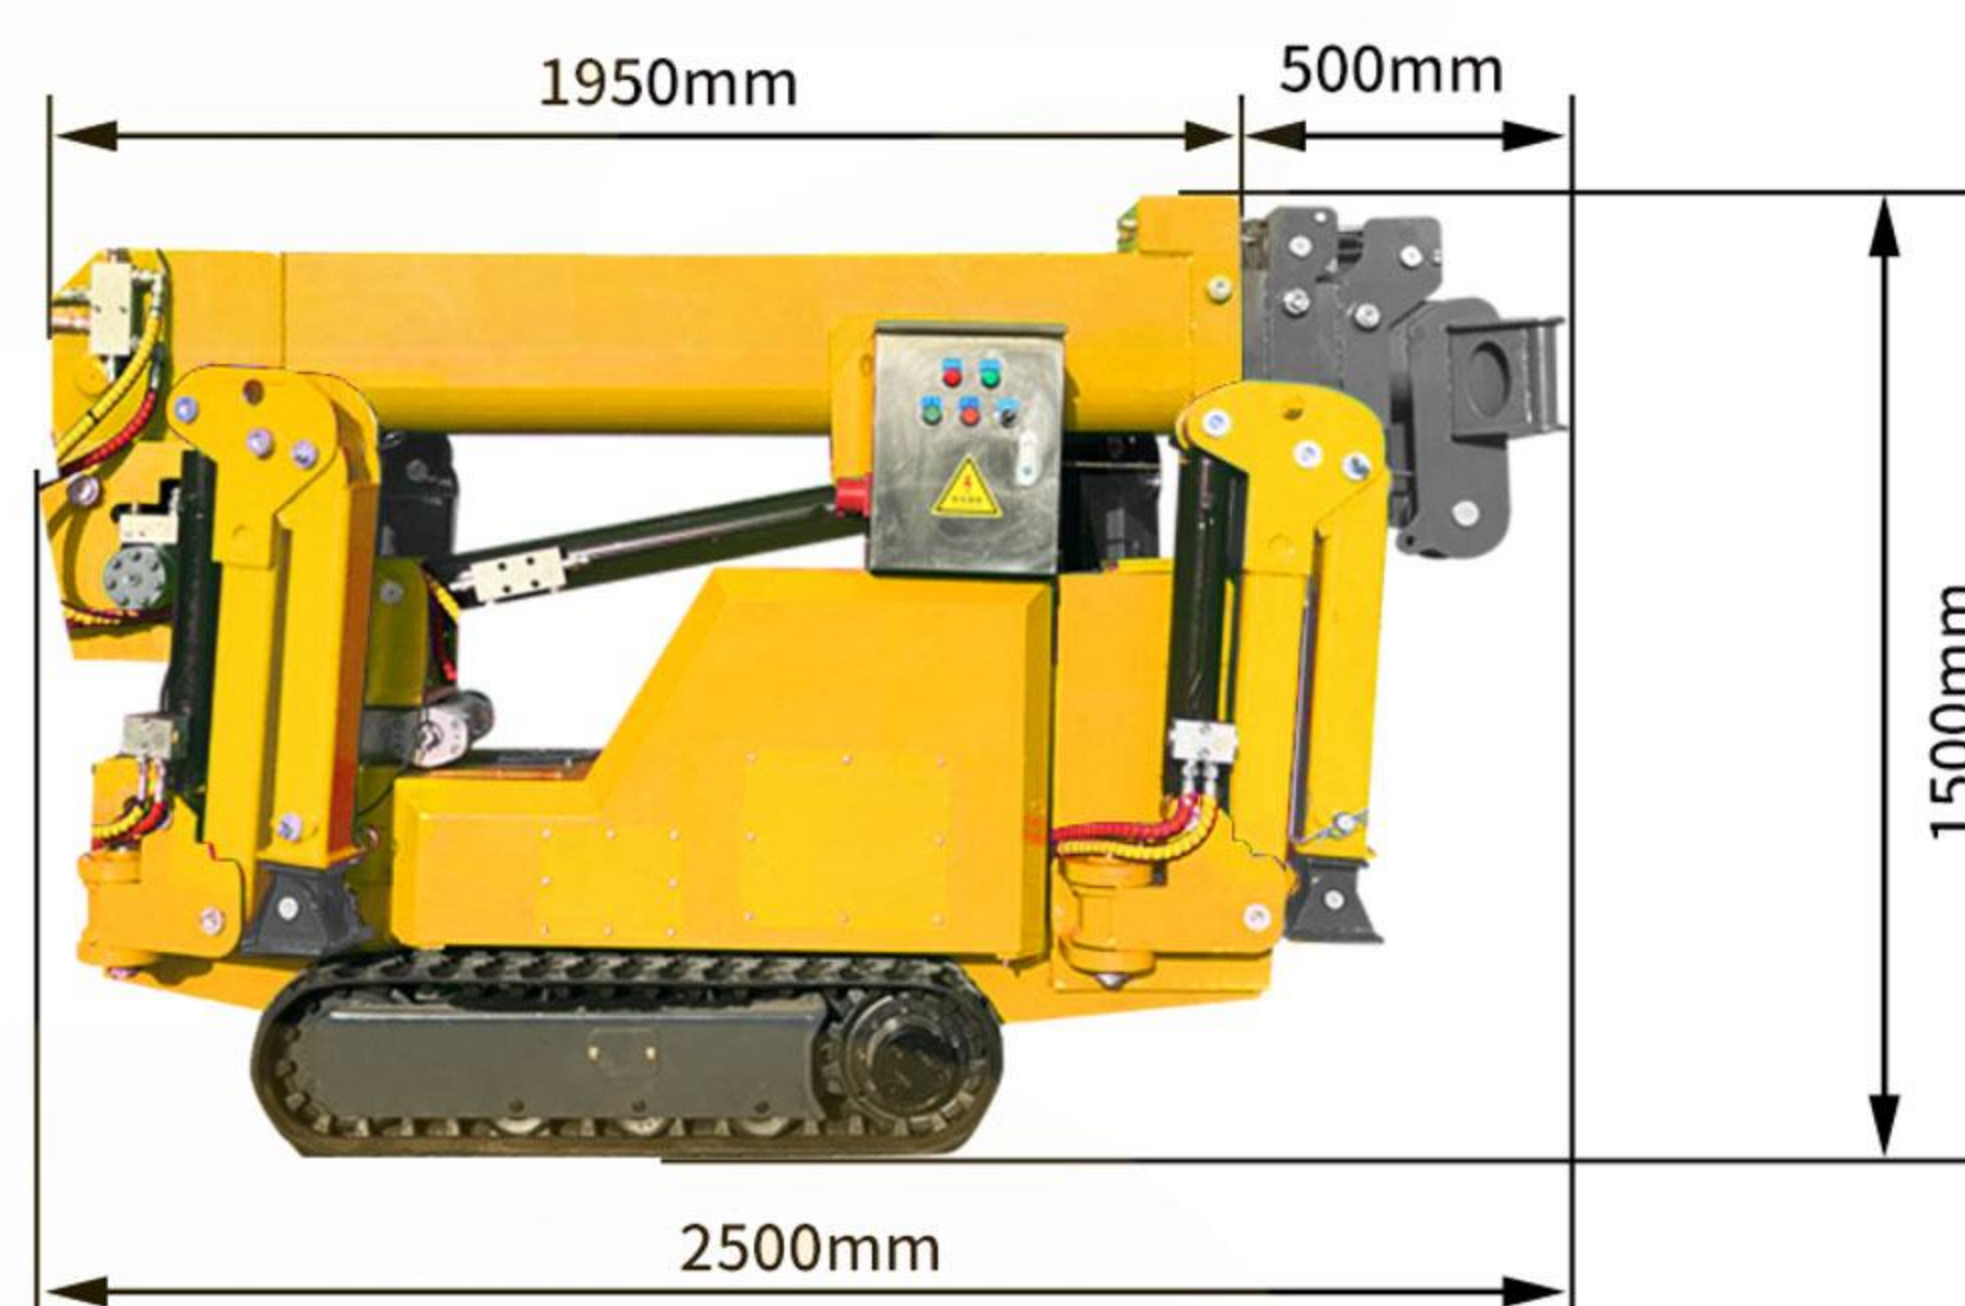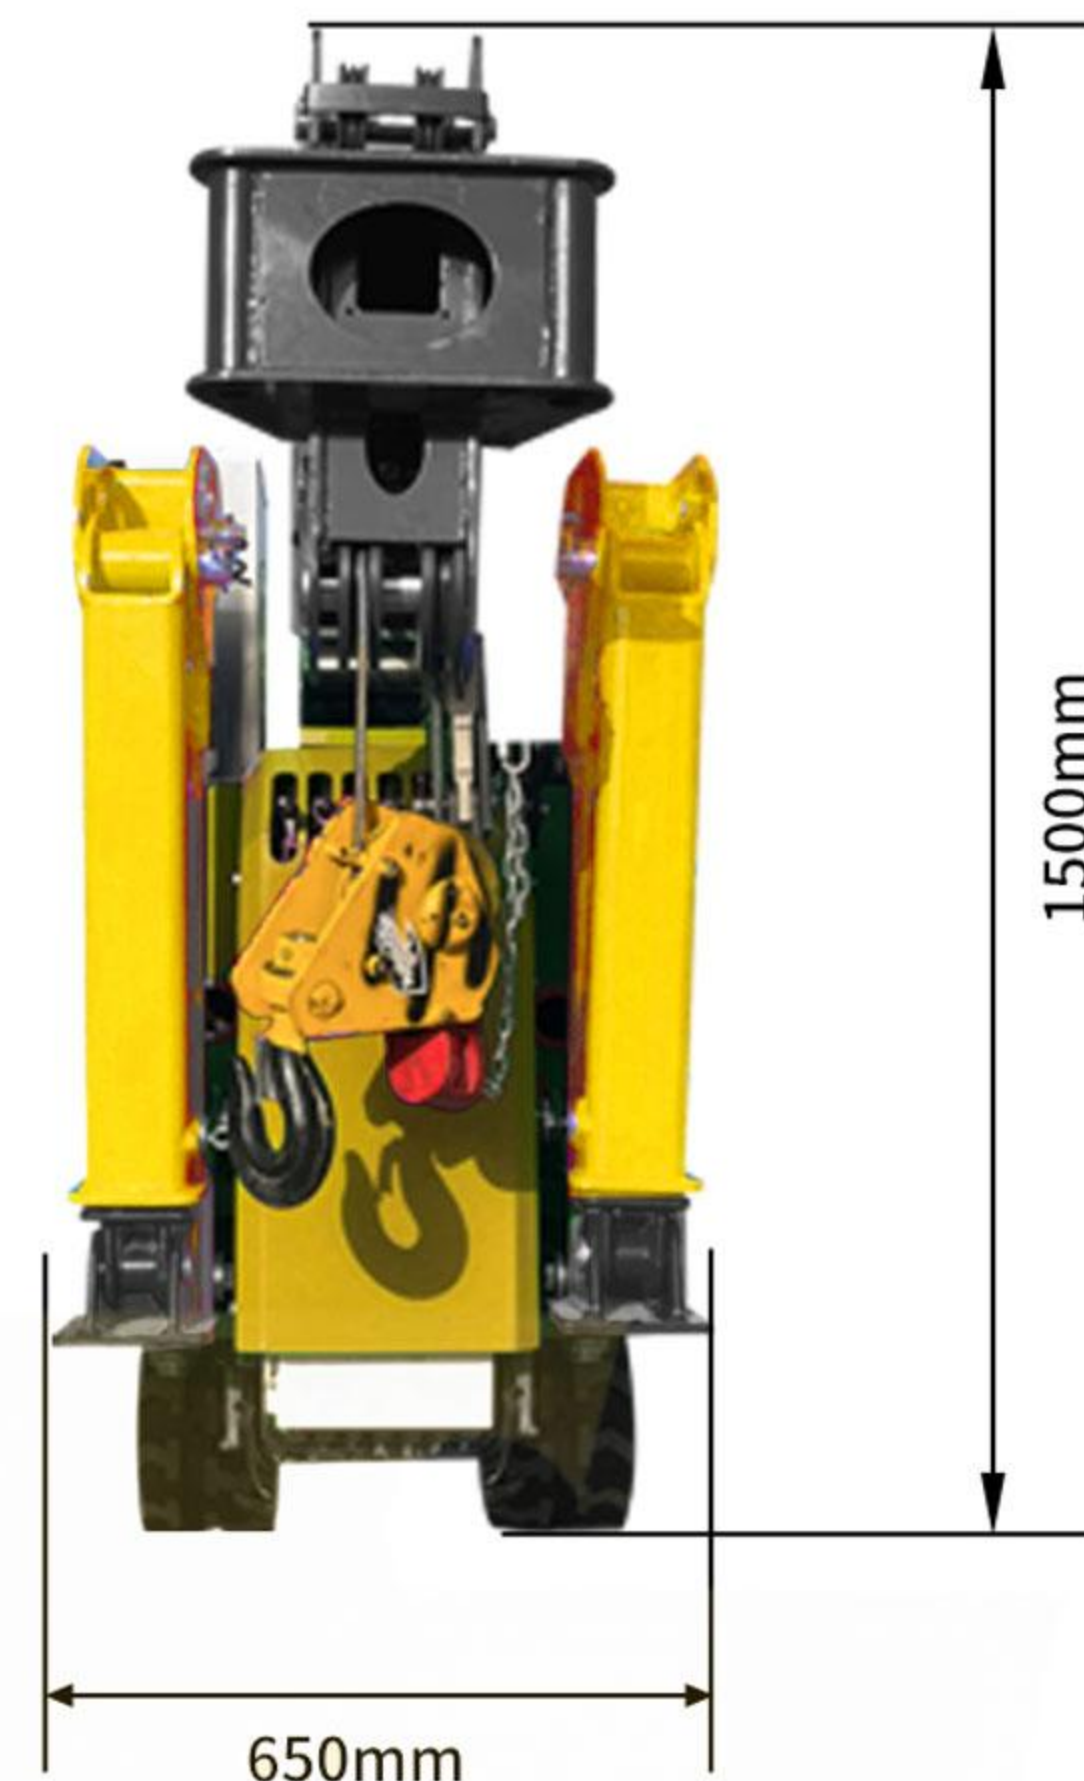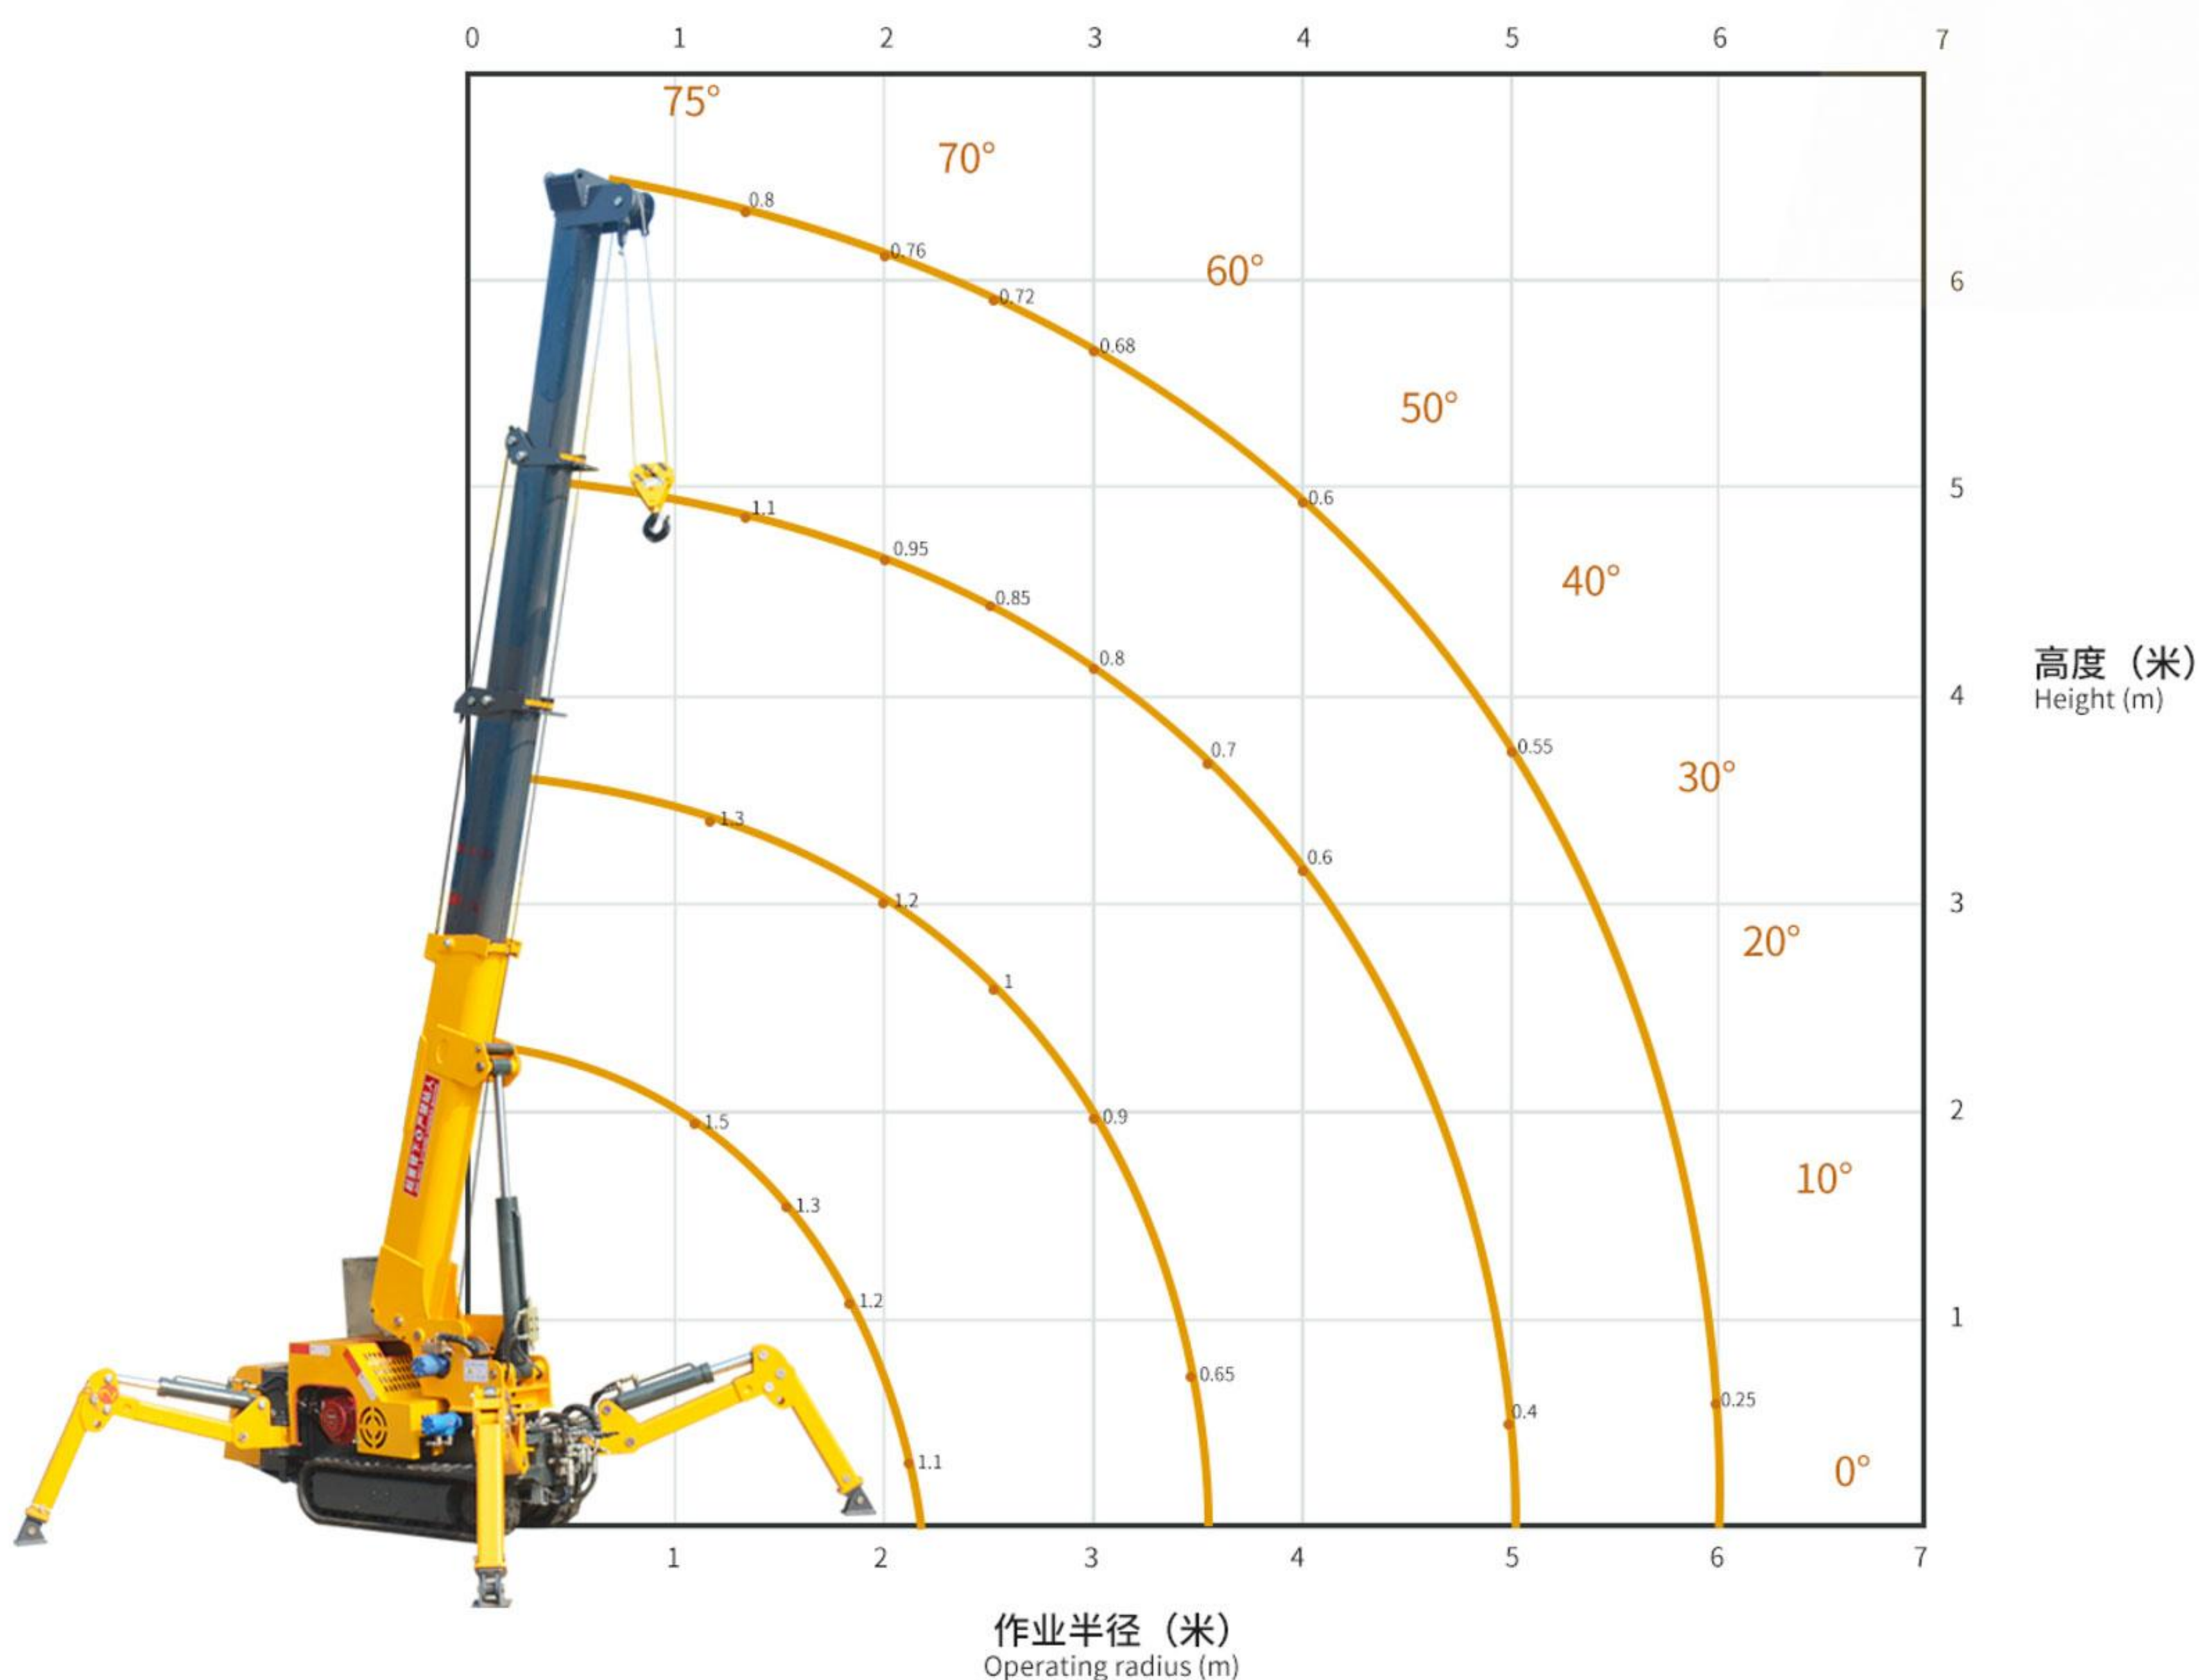

1.5吨蜘蛛吊机参数 1.5-ton Crawler Spider Crane

1.5T蜘蛛吊机 1.5T spider crane						
● 自重 (T) dead-weight (T)		1.7T	● 电机 Electrical Machinery	● 电压 voltage		AC380V
● 最大作业半径 Maximum operating radius		6m	● 发动机 engine	● 生产方 Manufacturer		本田 (可定制/可选配其他品牌) Honda (customizable/optional for other brands)
● 最大地上扬程 Maximum ground lift		6.5m		● 型号 model number		390CC
● 卷扬装置 Winch device	● 吊钩上升速度 Hook lifting speed	0-8m/min (4绳) 0-8m/min (4 ropes)		● 启动方式 start mode		电启动/手动 Electric start/manual
	● 钢丝绳规格 Specification of steel wire rope	Φ 8mm*45m		● 启动性能 start performance		-50℃-45℃
● 伸缩装置 Telescopic device	● 吊臂形式 Boom form	2m×4段吊臂 (可定制) 2m×4-section lifting arm (Support customization)		● 燃料/容积 Fuel/Volume		汽油/8L Gasoline/8L
	● 吊臂长/时间 Boom length/time	6.5m/20sec (可定制) 6.5m/20sec (Support customization)		● 电池容量 Battery capacity		12v 45AH
● 变幅装置 Luffing device	● 吊臂角度/时间 Boom angle/time	0-78°/13sec	● 操作系统 operating system	● 燃油消耗率 Fuel consumption rate		274g/kW-h
● 回旋装置 gyroscope	● 回转角度/速度 Rotation angle/speed	0-360°(连续) /60sec 0-360° (continuous)/60sec		● 噪声等级 noise level		额定转速≤81.5dBA (1m) Rated speed ≤ 81.5dBA (1m)
● 支腿 Outrigger	● 支腿动作形式 Outrigger movement form	手动旋出+油压自动支撑(三节支腿可伸缩) Manual screw-out + hydraulic automatic support (three-section legs retractable)		● 操作种类(吊臂/支腿)手动行走 Operation type (boom/leg), manual walking		手动操作、手动行走 (可选遥控操作) Manual operation, manual travel (optional remote control operation)
	● 最大伸出幅度 (mm) Maximum extension amplitude (mm)	3600 (长) X3400 (后) X3400 (前) 3600 (long) X3400 (rear) X3400 (front)	● 操作特性 Operational Characteristics		手动操作(可选遥控操作) Manual operation (optional remote control operation)	
● 行走装置 running gear	● 行走方式 Walking mode	液压驱动 hydraulic drive	● 标准配置 Standard configuration	汽油机可更换柴油机 Gasoline engines can be replaced with diesel engines		
	● 行走速度 Walking speed	0-2.5km/h	● 整车尺寸 Vehicle Size	长2.5米 宽0.65米 高1.5米 2.5meters length, 0.65meters width, and 1.5 meters height		
	● 爬坡能力 Gradeability	25°(36%)	● 履带(mm) Track (mm)	180(宽)72(节距)37(节) 180 (width) 72 (pitch) 37 (section)		
● 可选装 Optional		可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black				

1.5T蜘蛛吊润滑部位图

1.5T spider crane lubrication parts diagram

卷扬机
a capstan

转盘
rotary (traffic)

注:转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”

Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / "Whenever the jibs are out, grease the jibs."

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.

本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)









无线遥控器
wireless remote

3吨蜘蛛吊机 3-ton spider crane

● 性能特点 Performance Characteristics

- 体积小、自重轻、结构紧凑，广泛用于楼层楼顶吊装，变电站检修等小空间
- 橡胶履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 可加遥控装置 操作便捷
- Small size, light weight, compact structure, widely used in small space such as floor roof lifting, substation maintenance, etc.
- Rubber tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- Remote control can be added for easy operation

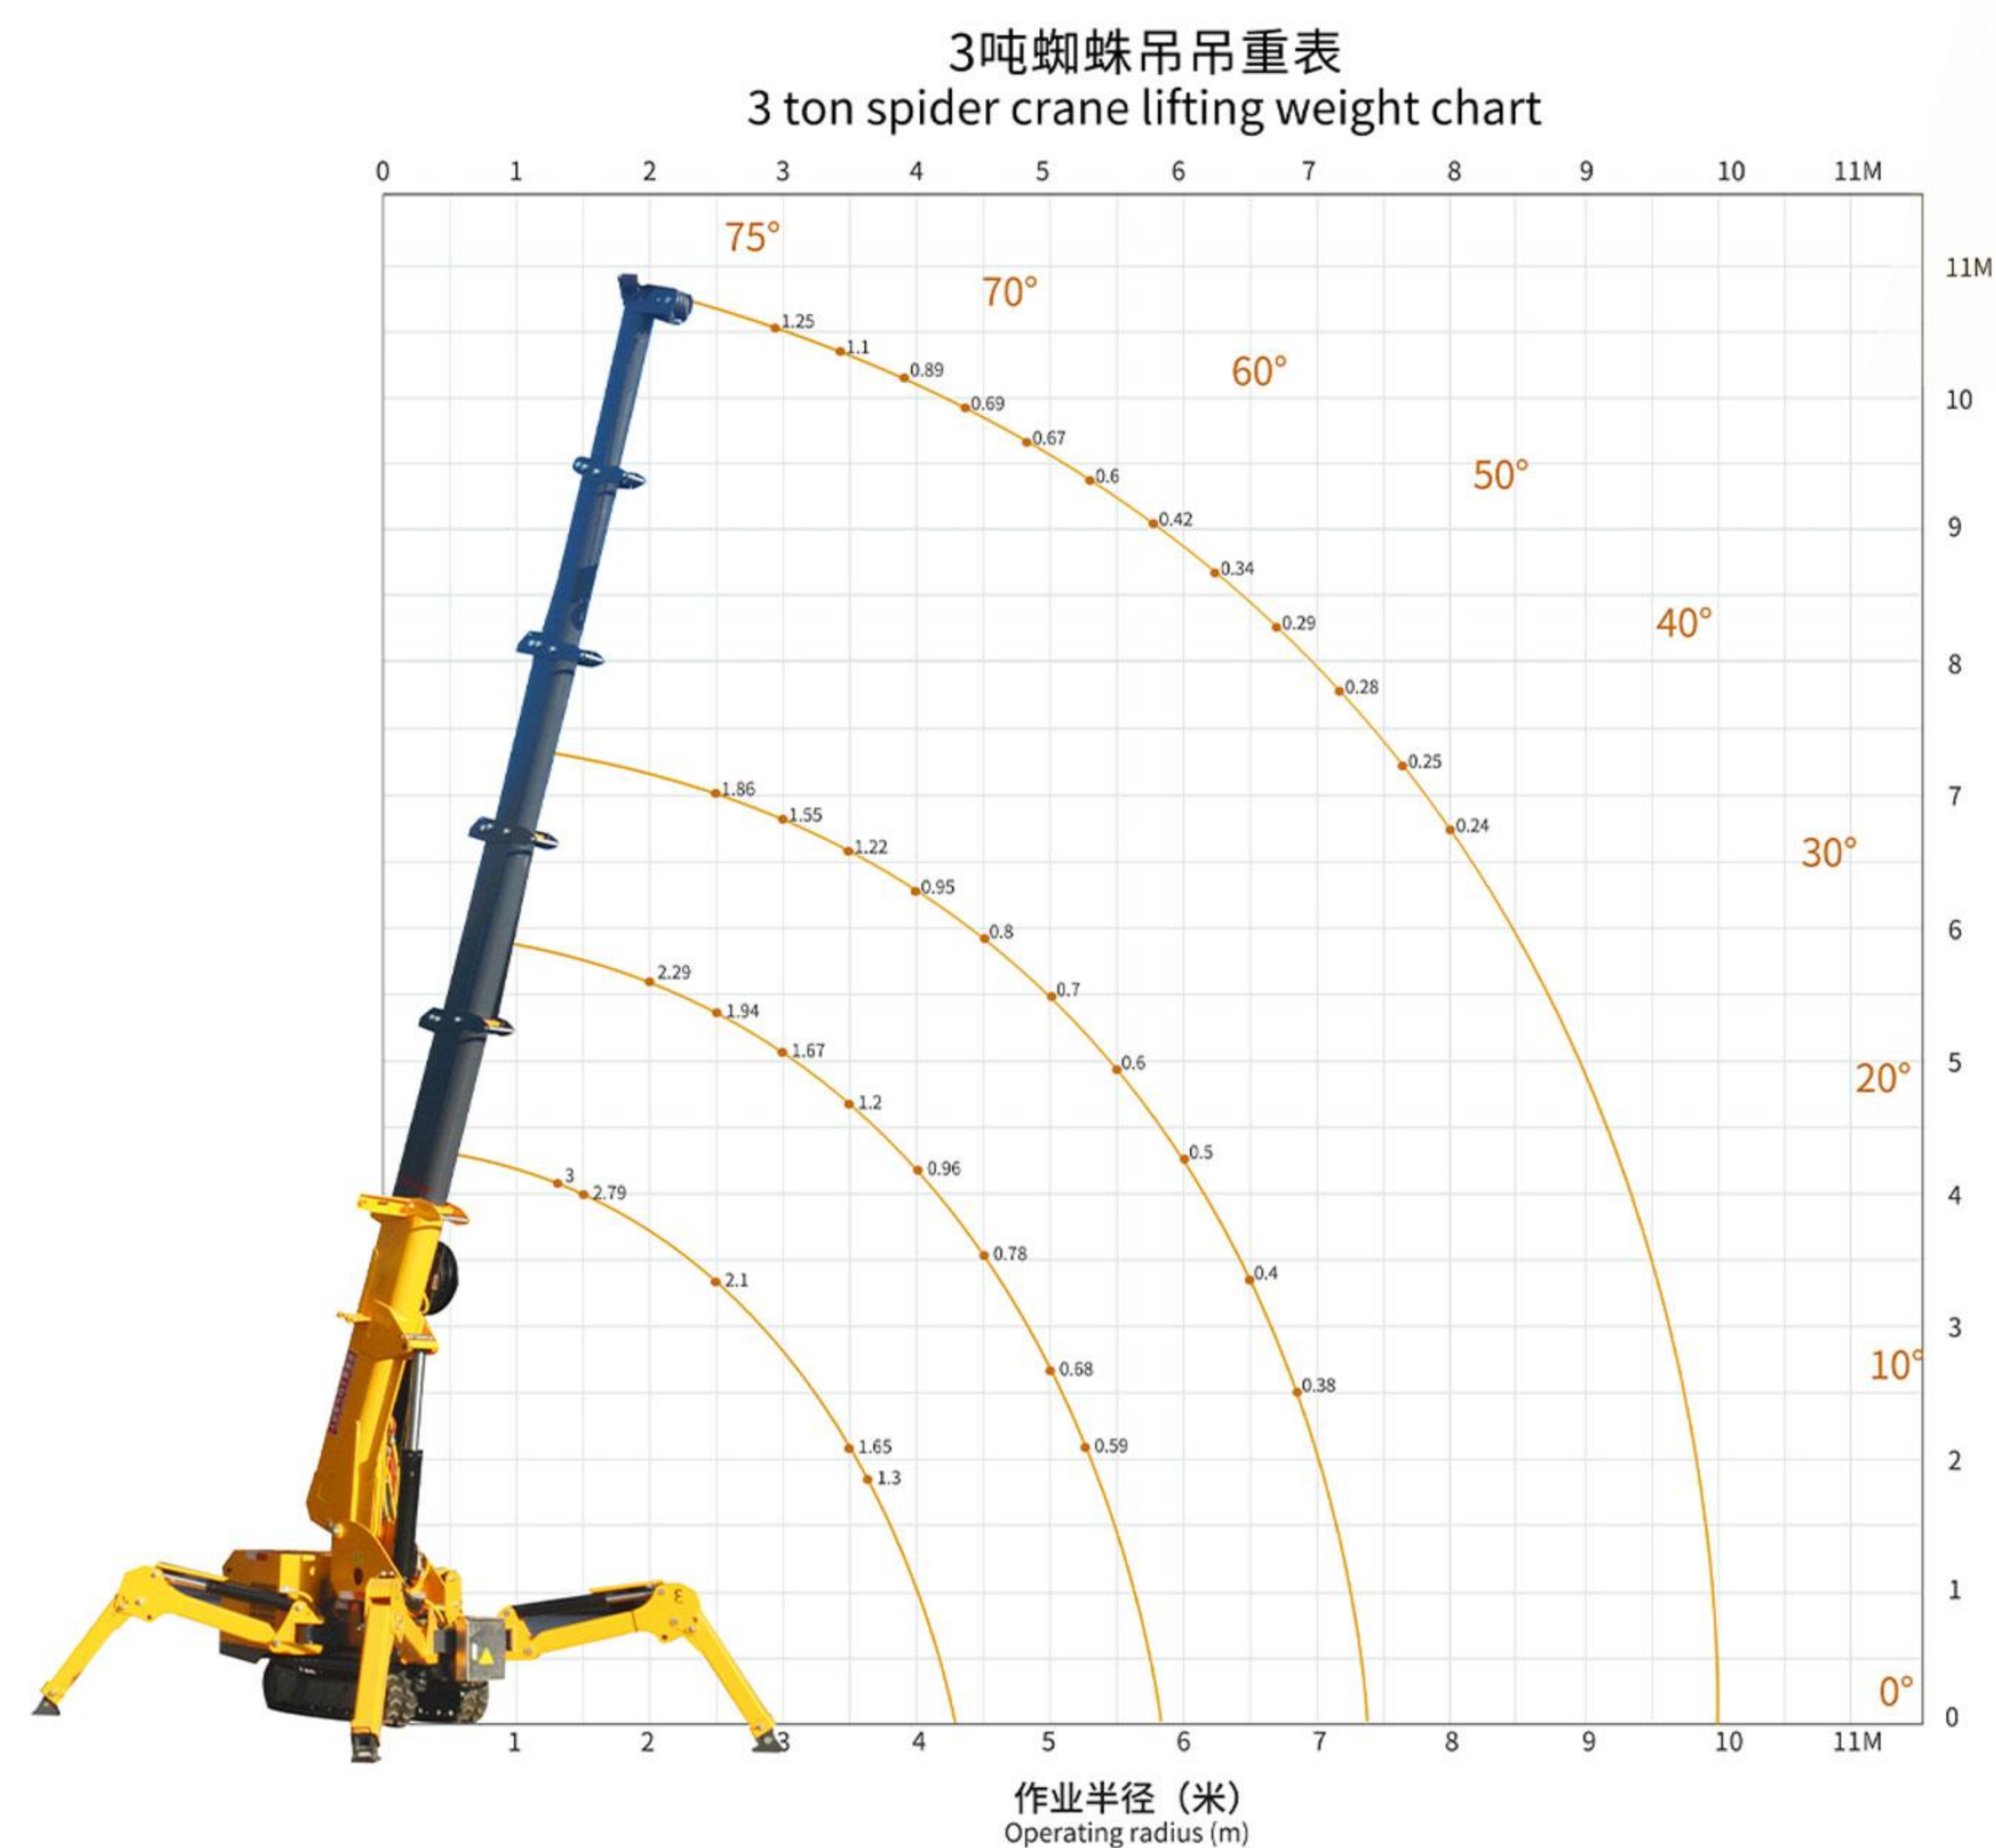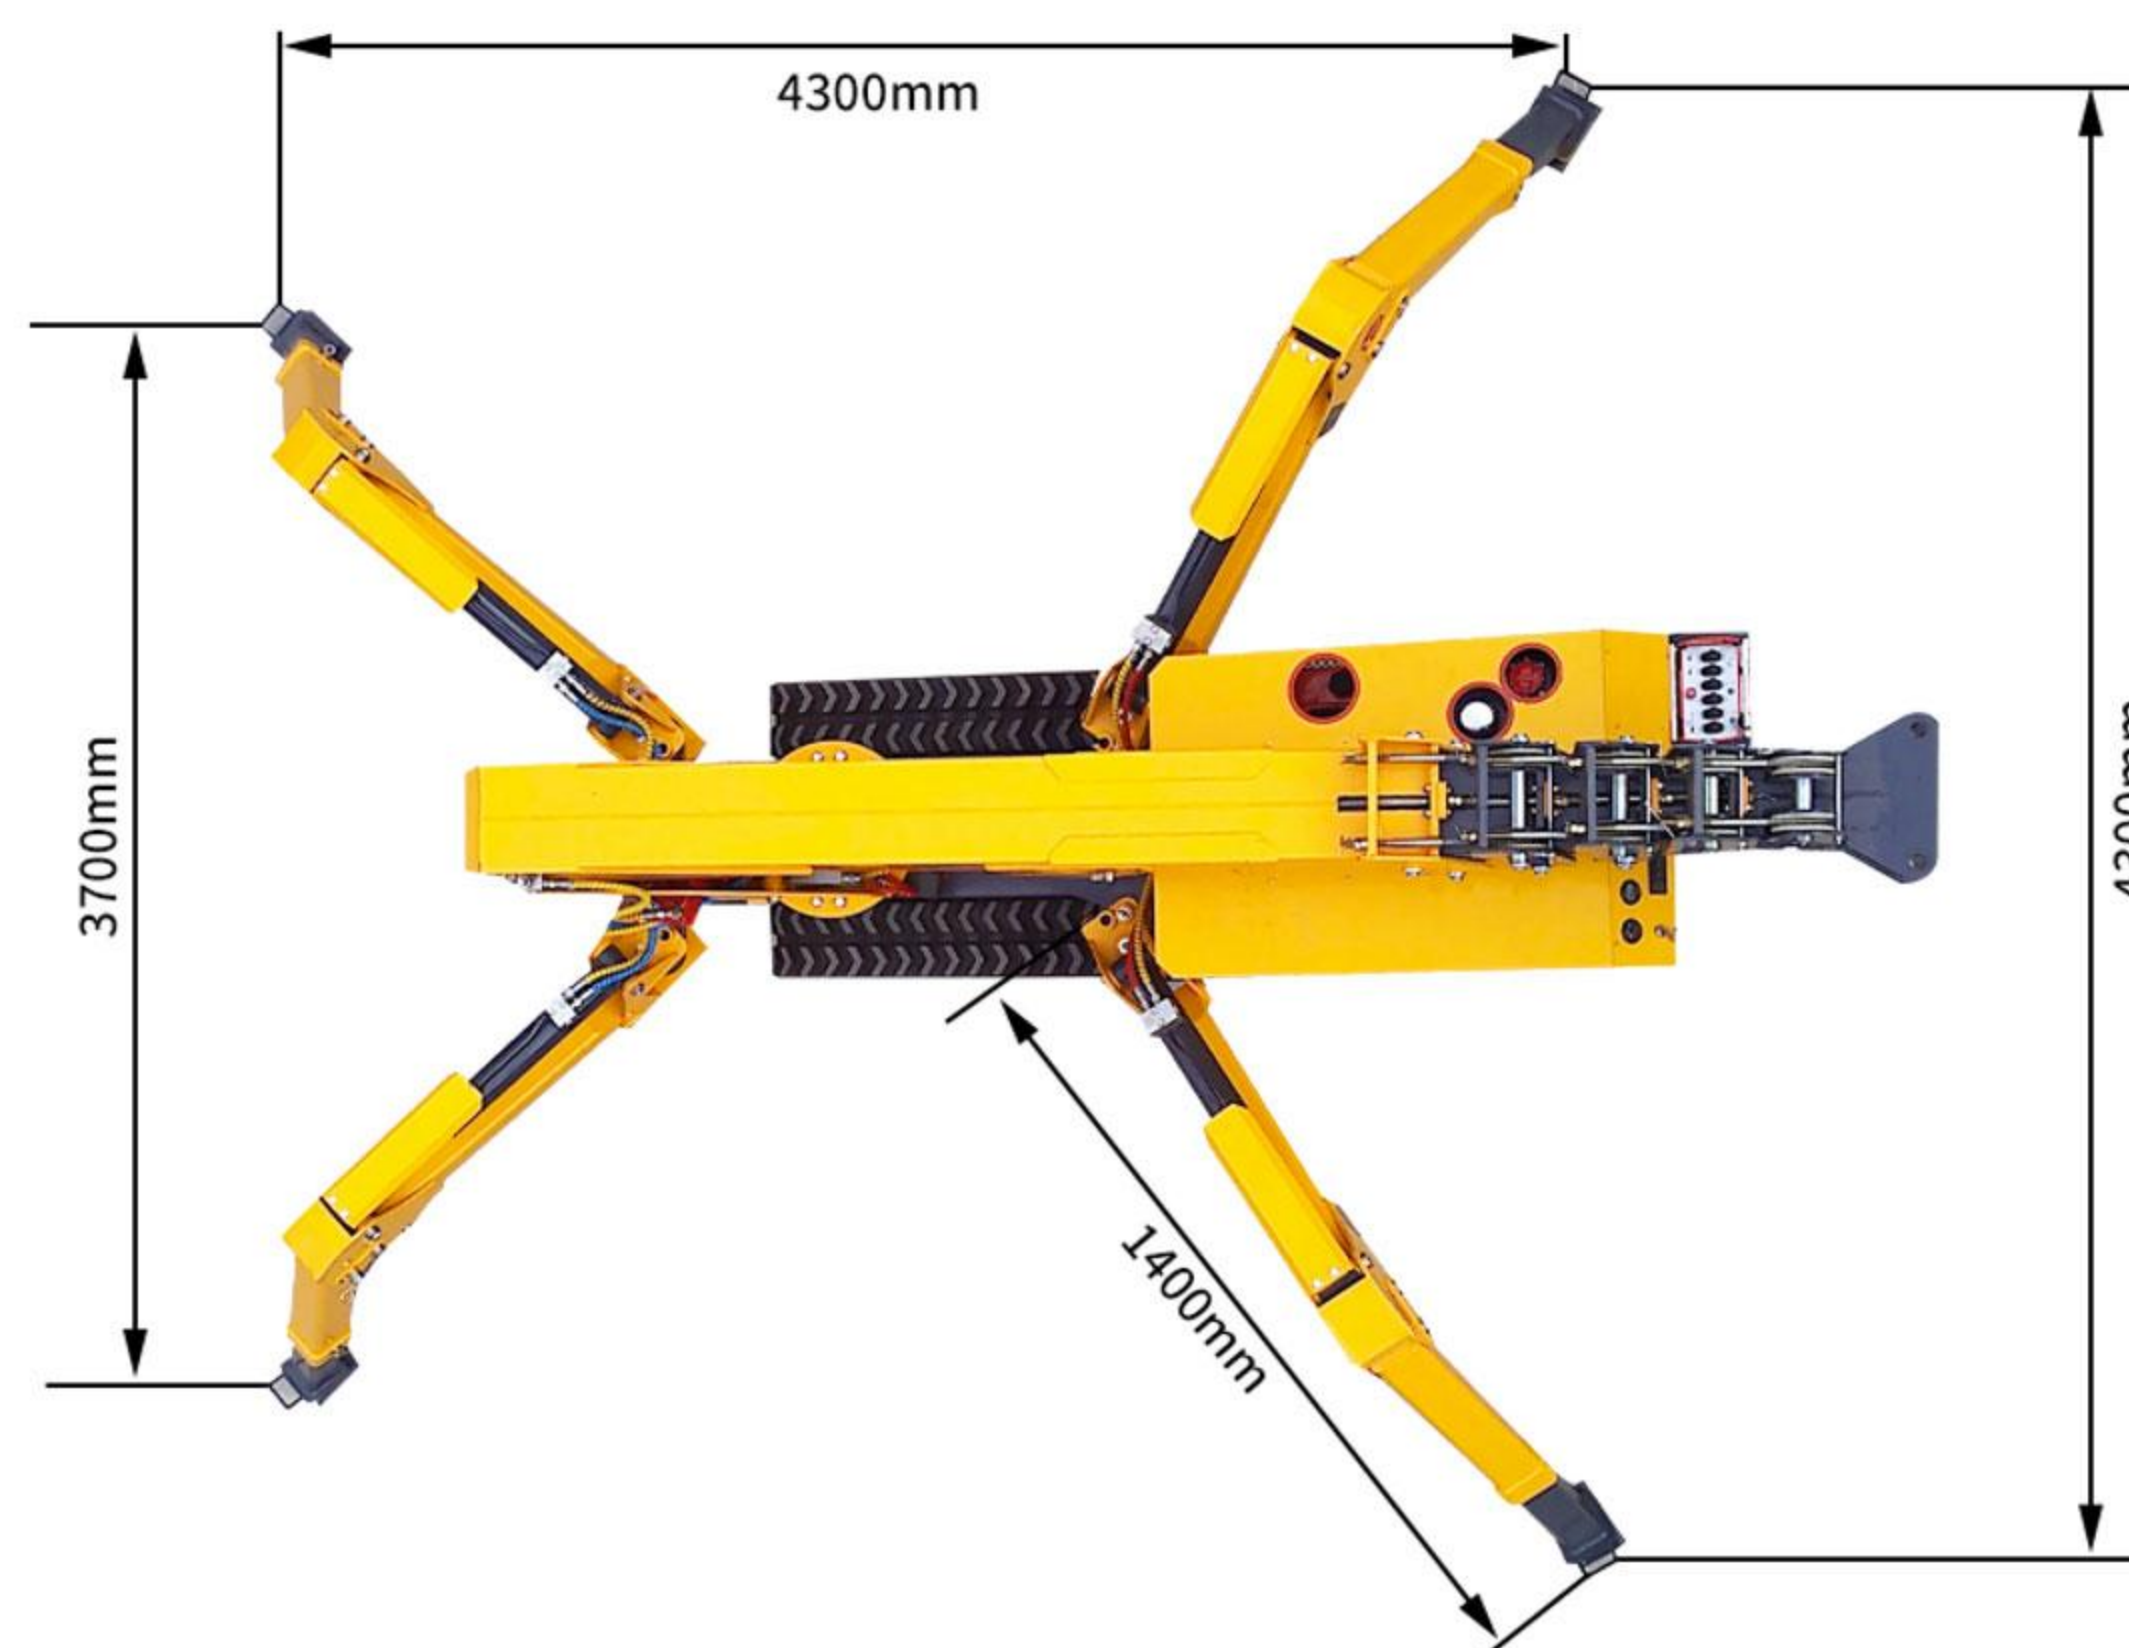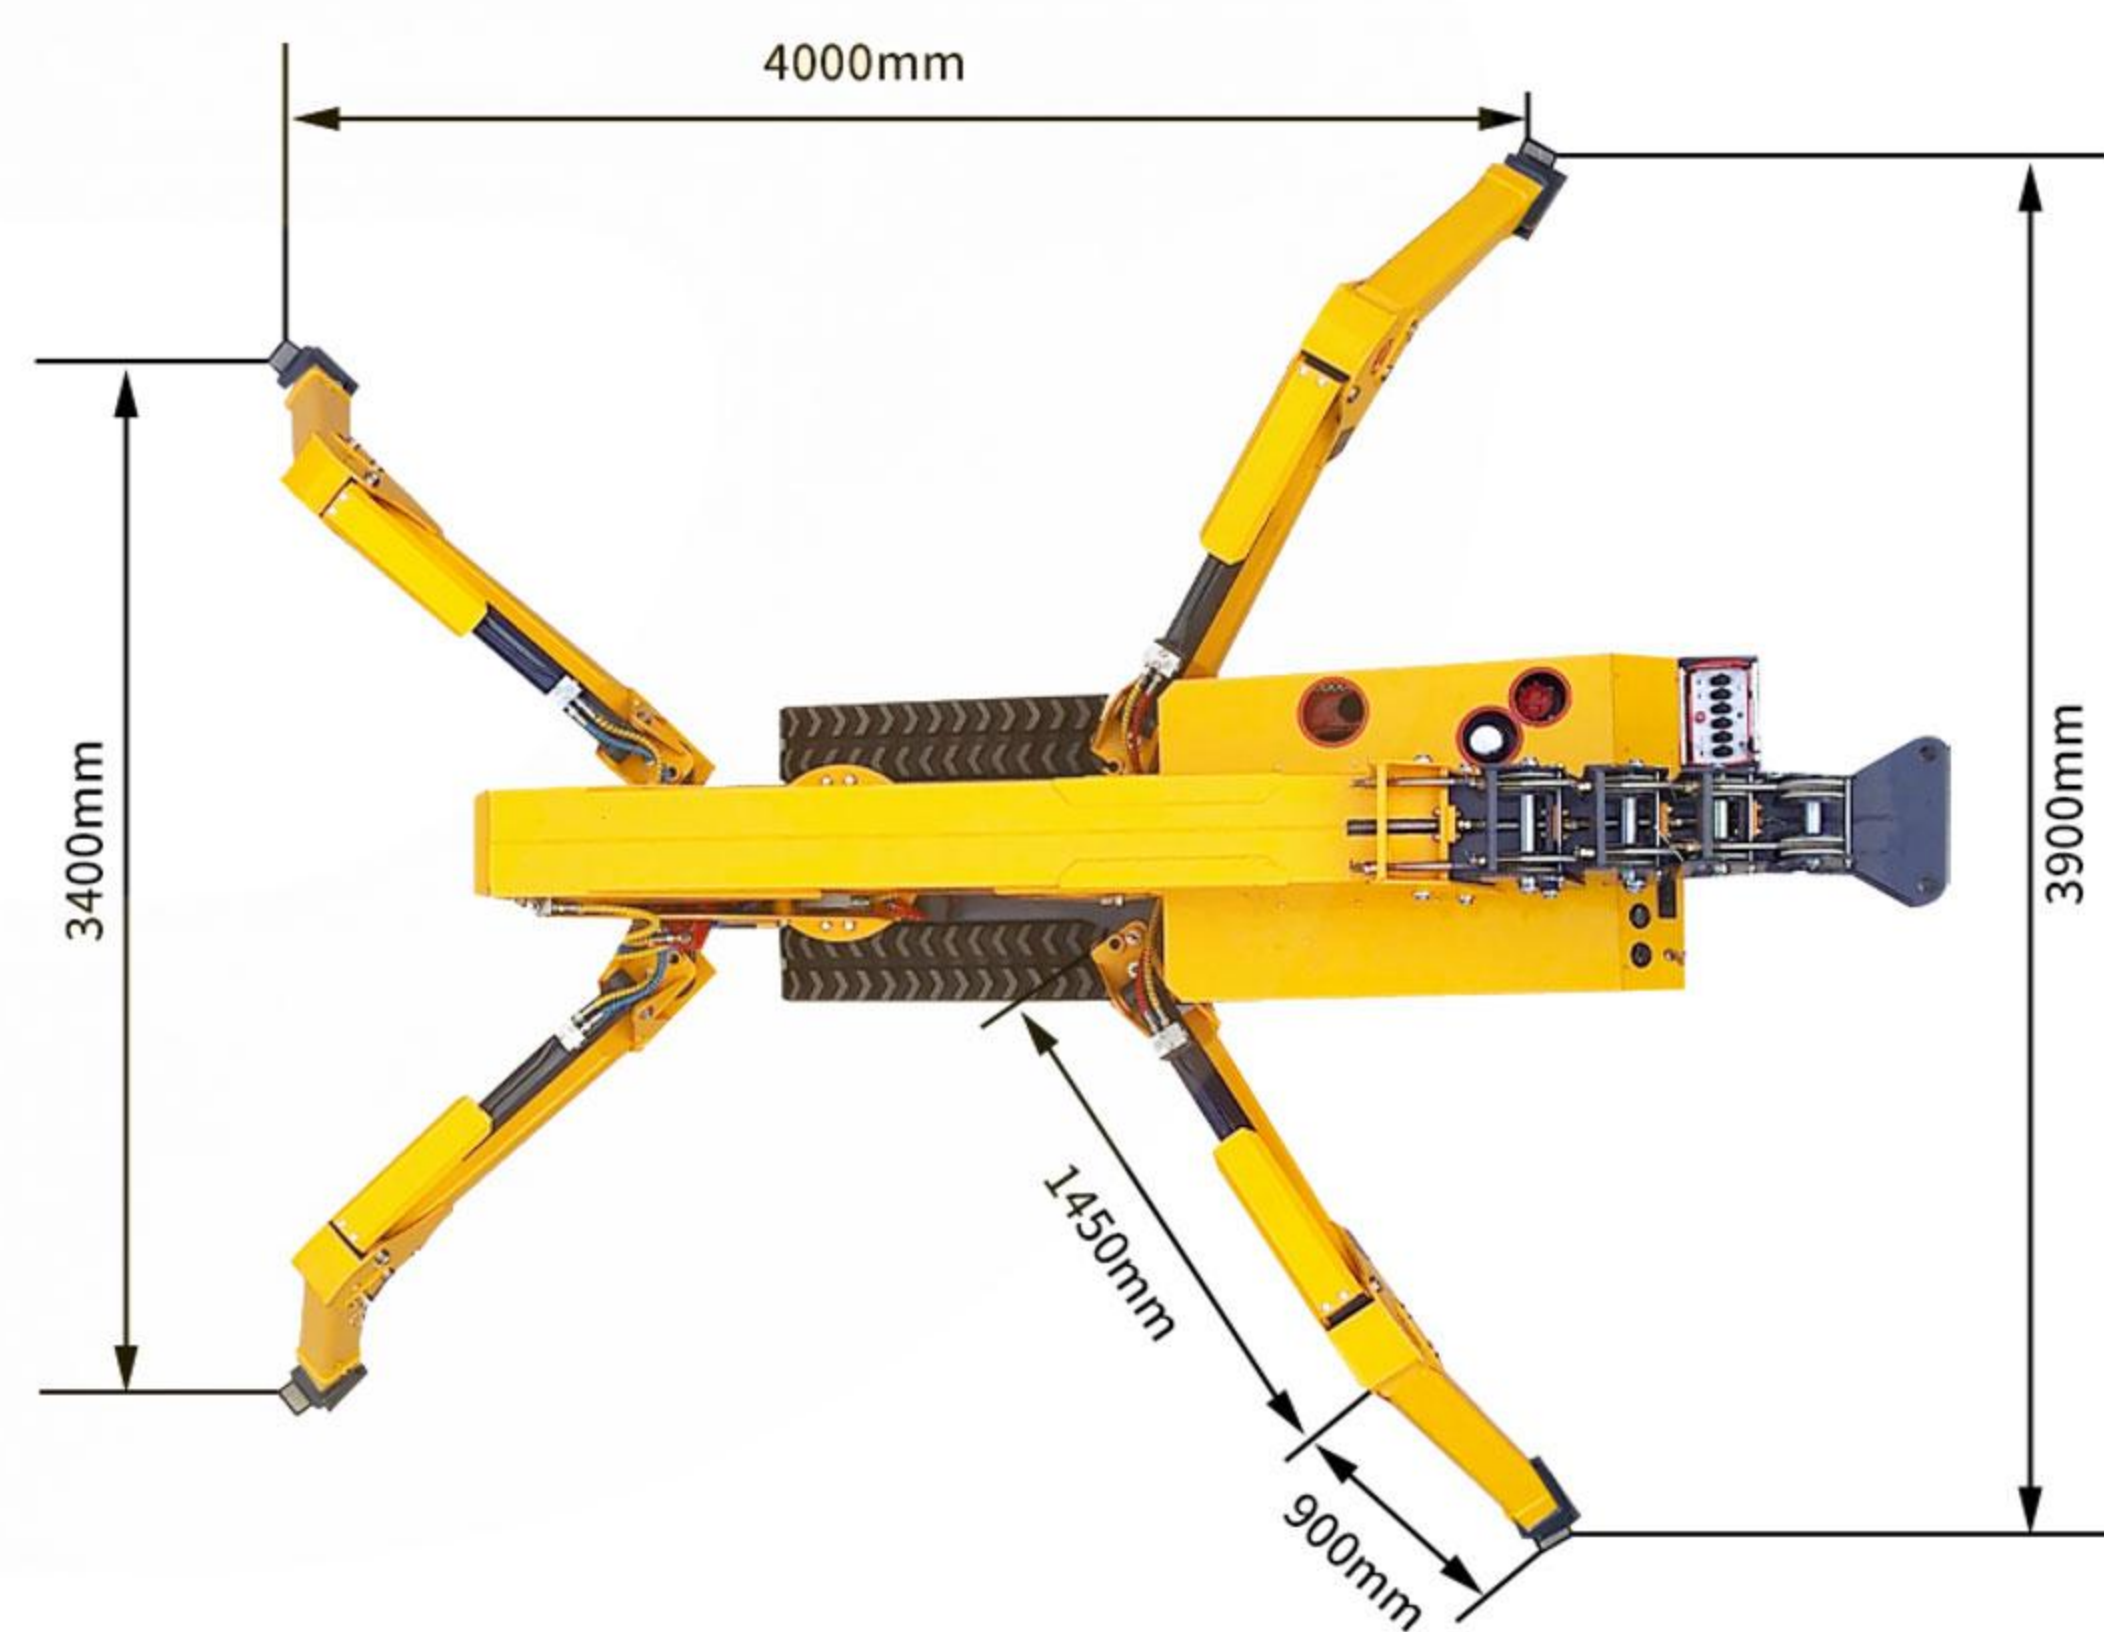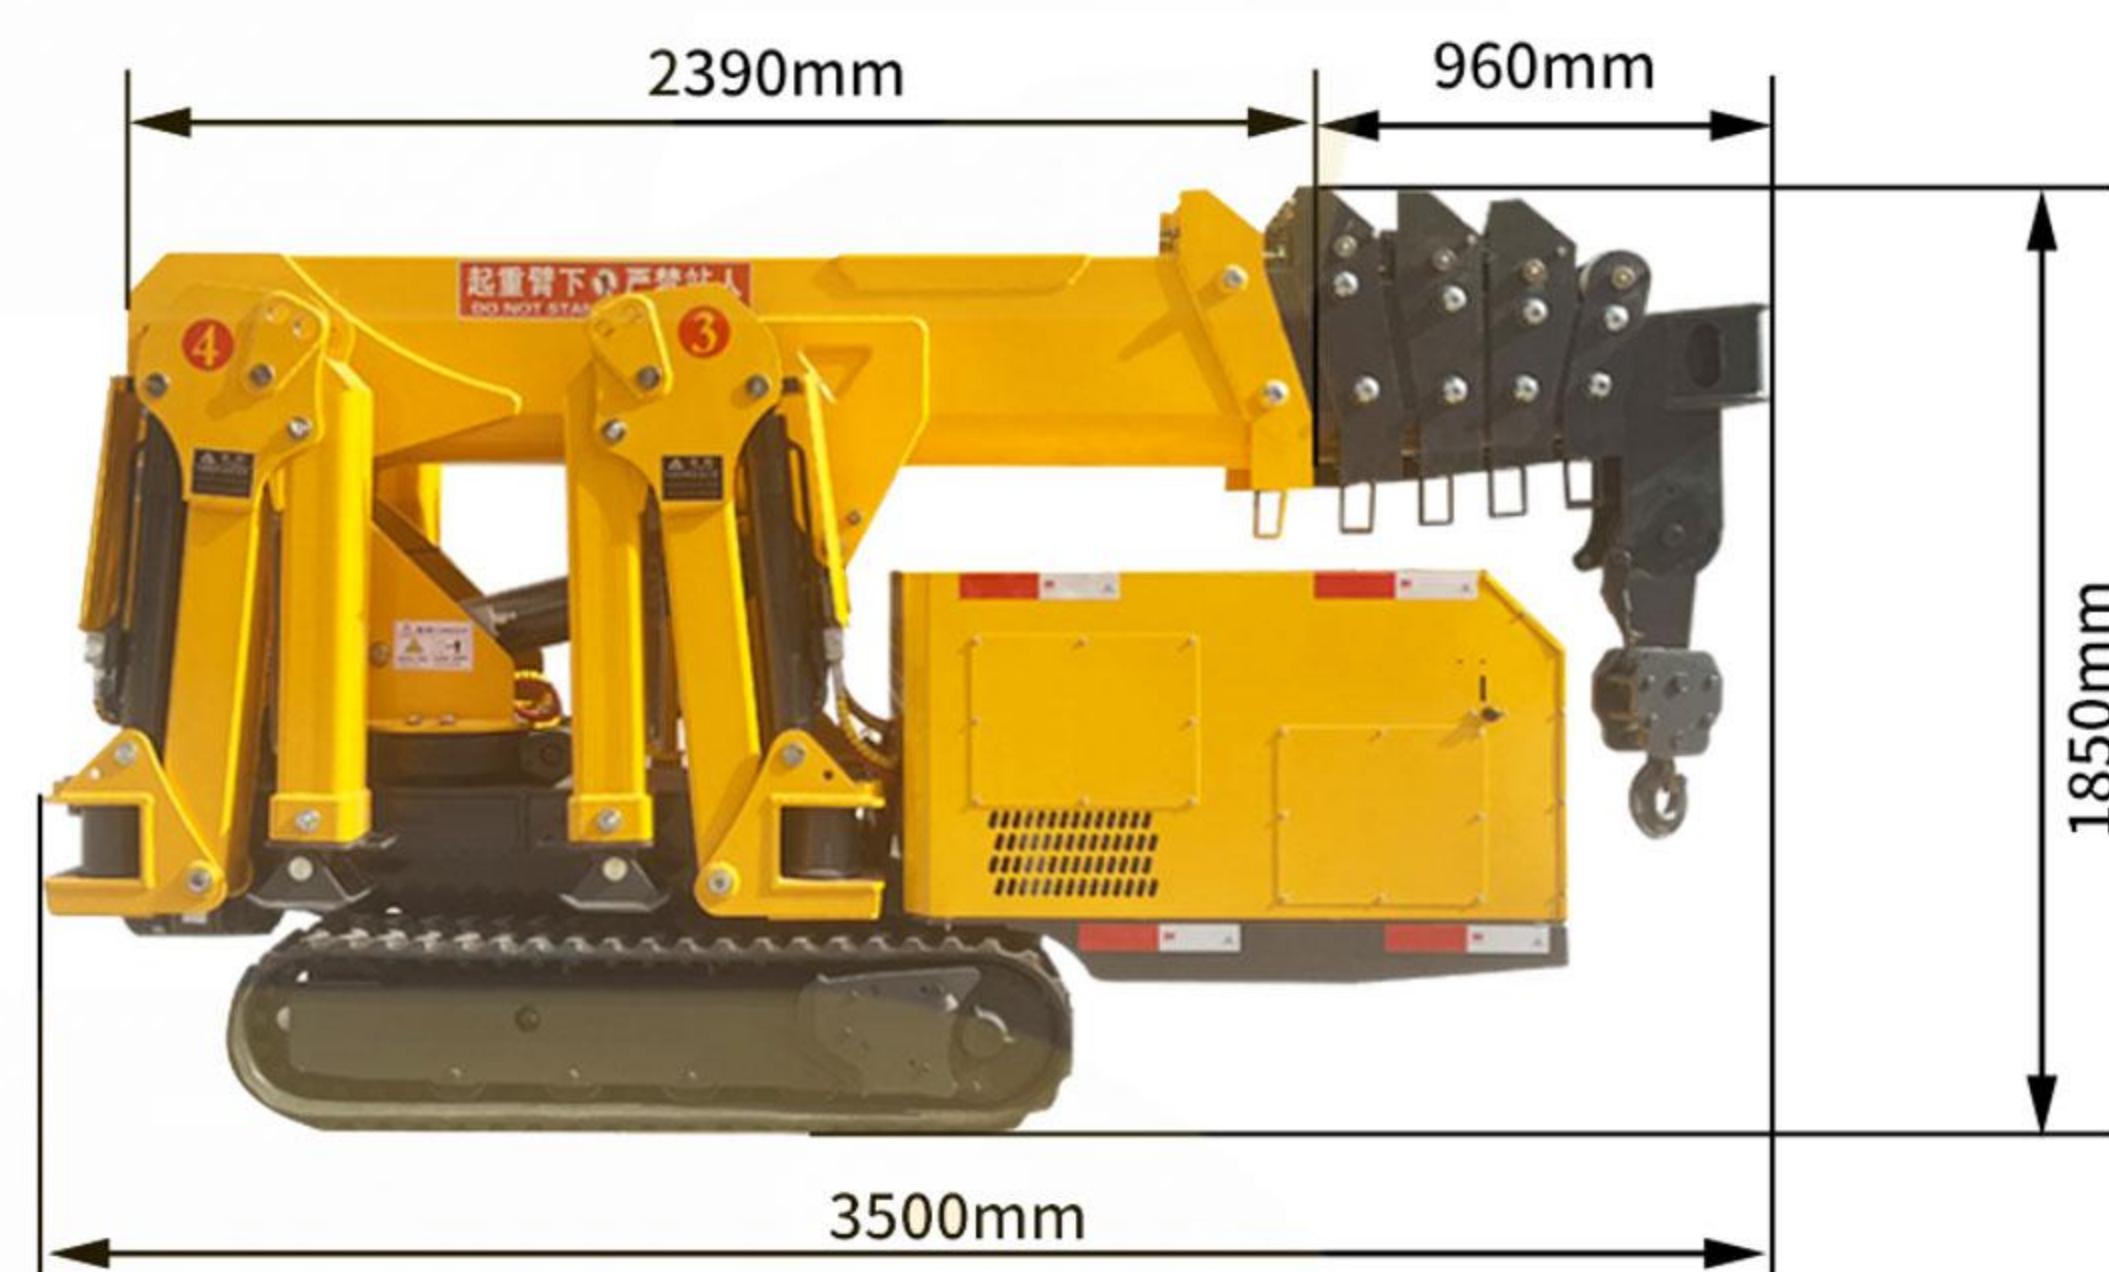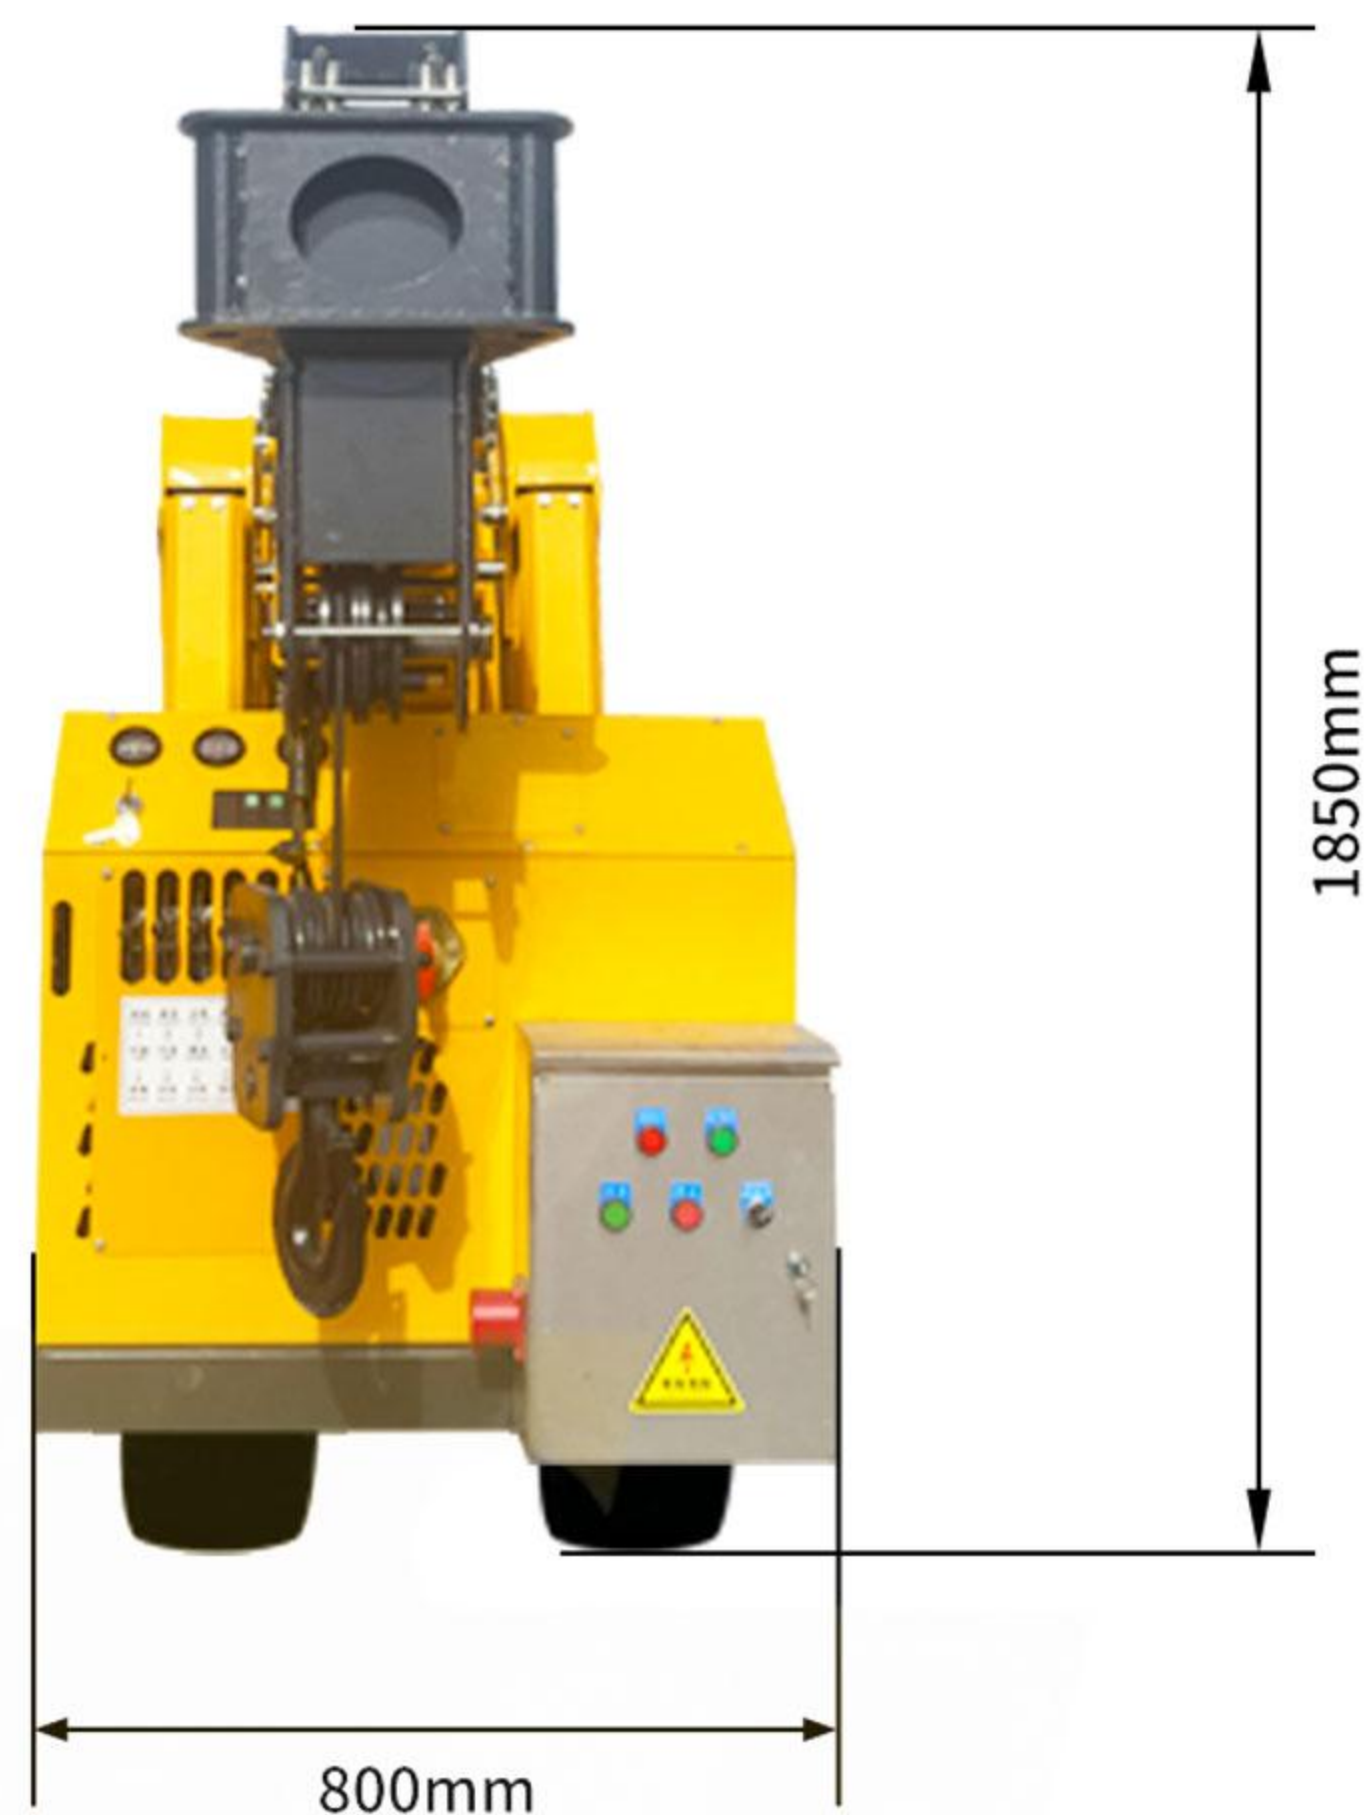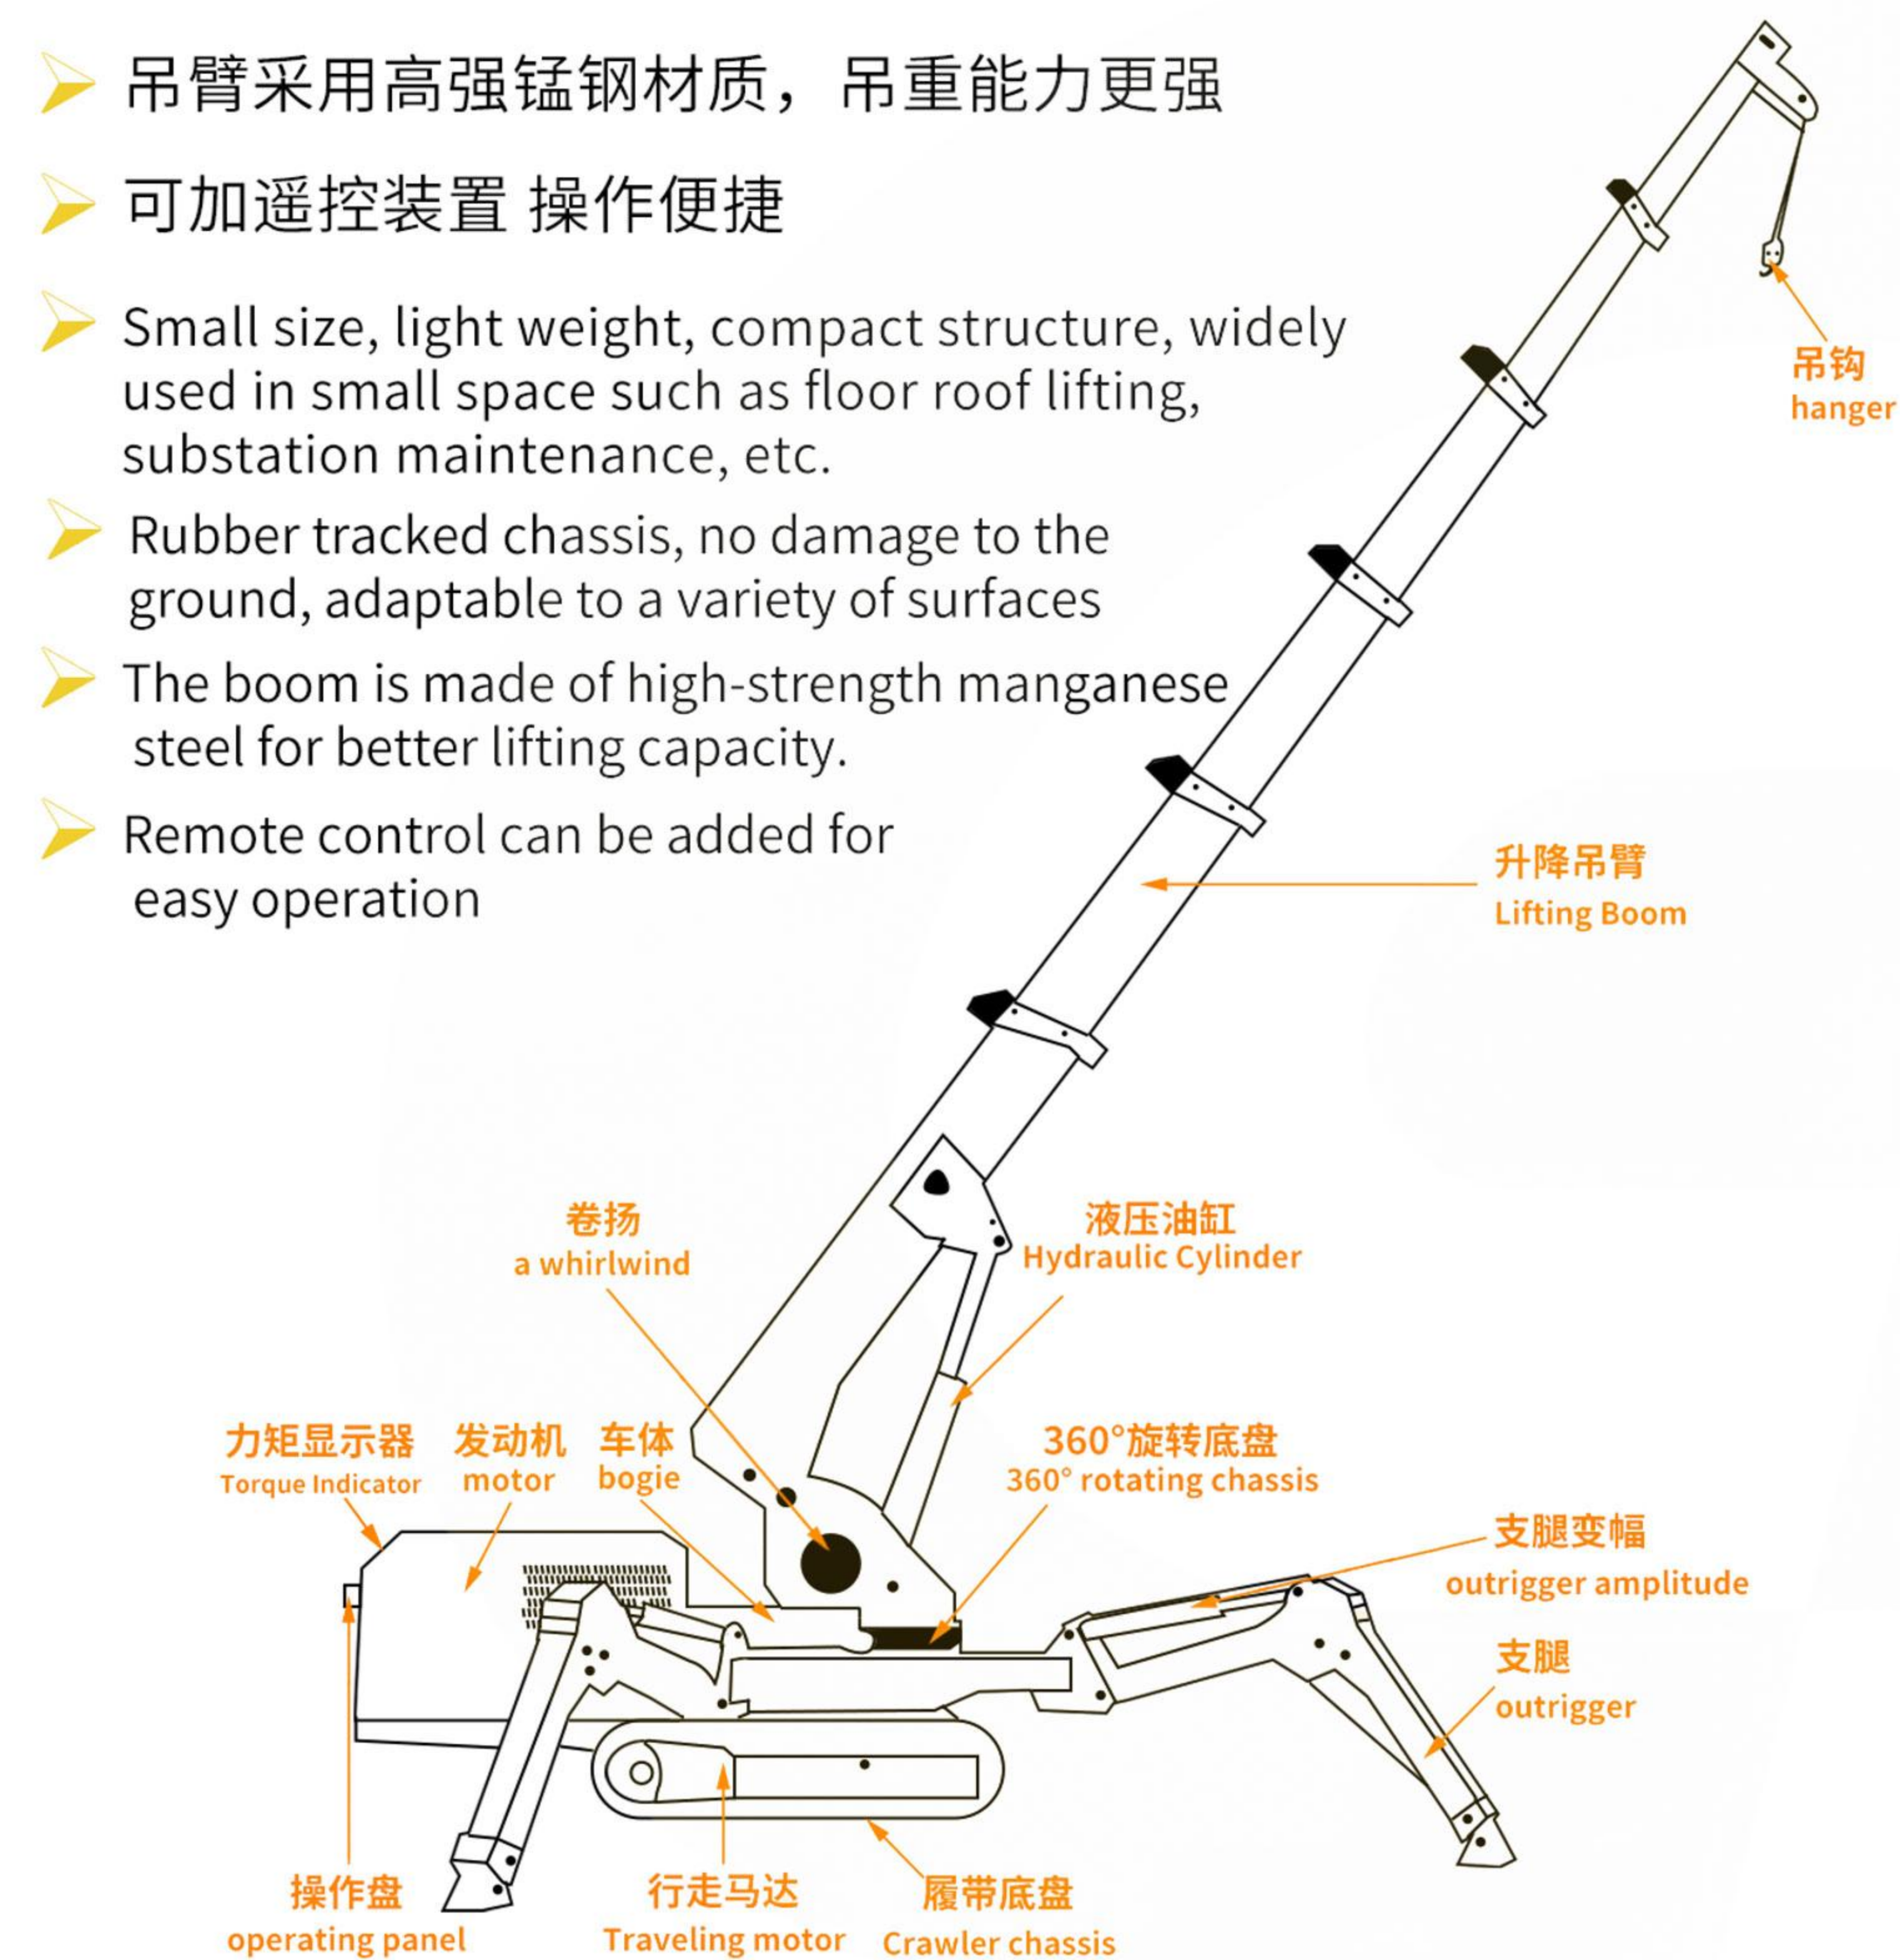

3吨蜘蛛吊机参数 3-ton Crawler Spider Crane

3T蜘蛛吊机 3T Spider Crane			
● 自重 (T) dead-weight (T)		2.7T	● 电机 Electrical Machinery
● 最大作业半径 Maximum operating radius		10m	● 发动机 engine
● 最大地上扬程 Maximum ground lift		10.8m	
● 卷扬装置 Winch device	● 吊钩上升速度 Hook lifting speed	0-8m/min (4绳) 0-8m/min (4 ropes)	
	● 钢丝绳规格 Specification of steel wire rope	Φ 8mm*45m	
● 伸缩装置 Telescopic device	● 吊臂形式 Boom form	2.4m×6段吊臂 (可定制) 2.4m×6-section lifting arm (Support customization)	
	● 吊臂长/时间 Boom length/time	3.1m-10.8m/20sec (可调节) 3.1m-10.8m/20sec (adjustable)	
● 变幅装置 Luffing device	● 吊臂角度/时间 Boom angle/time	0-78°/13sec	
● 回旋装置 gyroscope	● 回转角度/速度 Rotation angle/speed	0-360°(连续) /60sec 0-360° (continuous)/60sec	
● 支腿 Outrigger	● 支腿动作形式 Outrigger movement form	手动旋出+液压支撑(三节支腿可伸缩) Manual screw out + hydraulic support (three-section legs retractable)	
	● 最大伸出幅度 (mm) Maximum extension amplitude (mm)	4300 (长) X3700 (后) X4300 (前) 4300 (length) X3700 (rear) X4300 (front)	
● 行走装置 running gear	● 行走方式 Walking mode	液压驱动 hydraulic drive	● 标准配置 Standard configuration
	● 行走速度 Walking speed	0-2.5km/h	● 整车尺寸 Vehicle Size
	● 爬坡能力 Gradeability	25°(36%)	● 履带(mm) Track (mm)
● 可选装 Optional			
可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black			
● 电压 voltage		AC380V	
● 生产方 Manufacturer		常柴 (可定制) Changchai(Support customization)	
● 型号 model number		常柴380G三缸14.7KW Changchai 380G three-cylinder 14.7KW	
● 启动方式 start mode		电启动 Electric start	
● 启动性能 start performance		-50℃-45℃	
● 燃料/容积 Fuel/Volume		柴油/12L Diesel oil/12L	
● 电池容量 Battery capacity		12v 45AH	
● 燃油消耗率 Fuel consumption rate		274g/kW-h	
● 噪声等级 noise level		额定转速≤81.5dBA (1m) Rated speed ≤ 81.5dBA (1m)	
● 操作种类(吊臂/支腿)手动行走 Operation type (boom/leg), manual walking		手动操作、手动行走(可选遥控) Manual operation, manual travel (optional remote control)	
● 操作特性 Operational Characteristics		手动操作 (可选遥控) Manual operation(Optional remote control)	
● 柴油机 Diesel engine		柴油机和电机 (双动力) Diesel engine and electric motor (dual power)	
● 长 Length		长3.5米, 宽0.8米, 高1.85米 3.5meters length, 0.8 meters width, and 1.85meters height	
● 宽 Width		220(宽)72(节距)50(节) 220 (width) 72 (pitch) 50 (section)	

3T蜘蛛吊润滑部位图

3T spider crane lubrication parts diagram

注:转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / "Whenever the jibs are out, grease the jibs."

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.

本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)




无线遥控器
wireless remote






4吨蜘蛛吊机 4-ton spider crane

● 性能特点 Performance Characteristics

- 体积小、自重轻、结构紧凑，广泛用于楼层楼顶吊装，变电站检修等小空间
- 橡胶履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 可加遥控装置 操作便捷
- Small size, light weight, compact structure, widely used in small space such as floor roof lifting, substation maintenance, etc.
- Rubber tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- Remote control can be added for easy operation

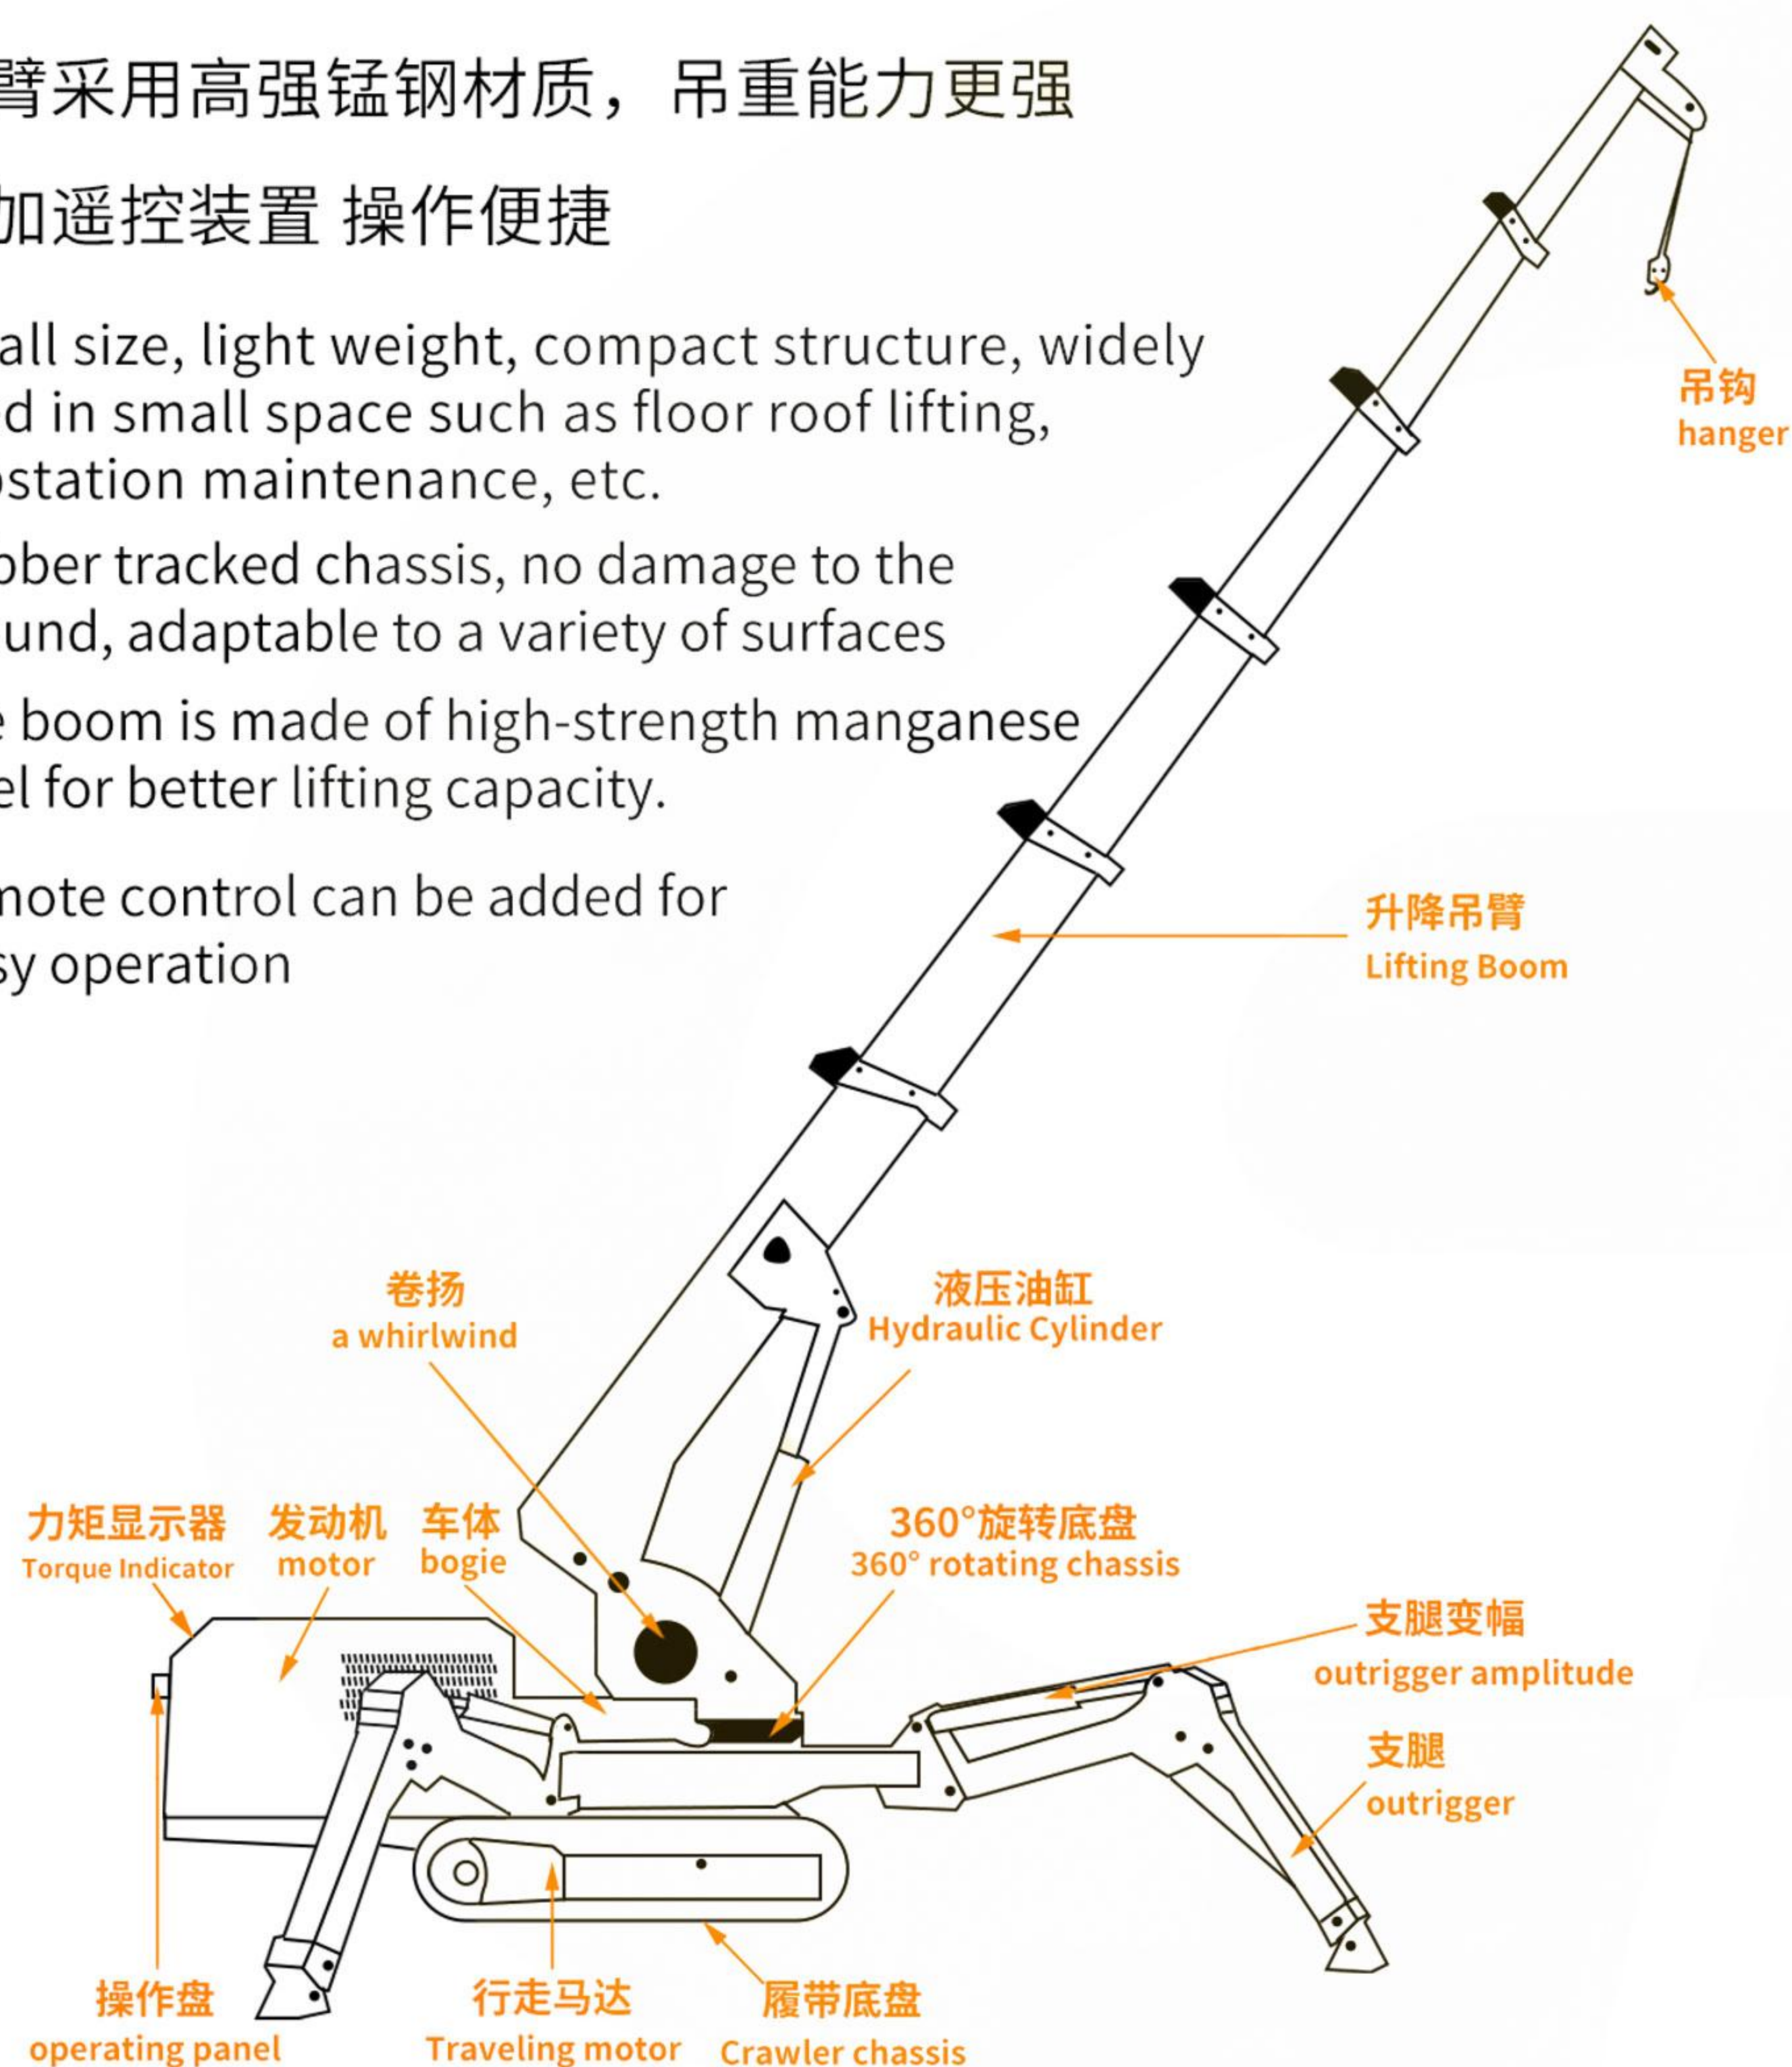

4吨蜘蛛吊重表
4 ton spider crane lifting weight chart

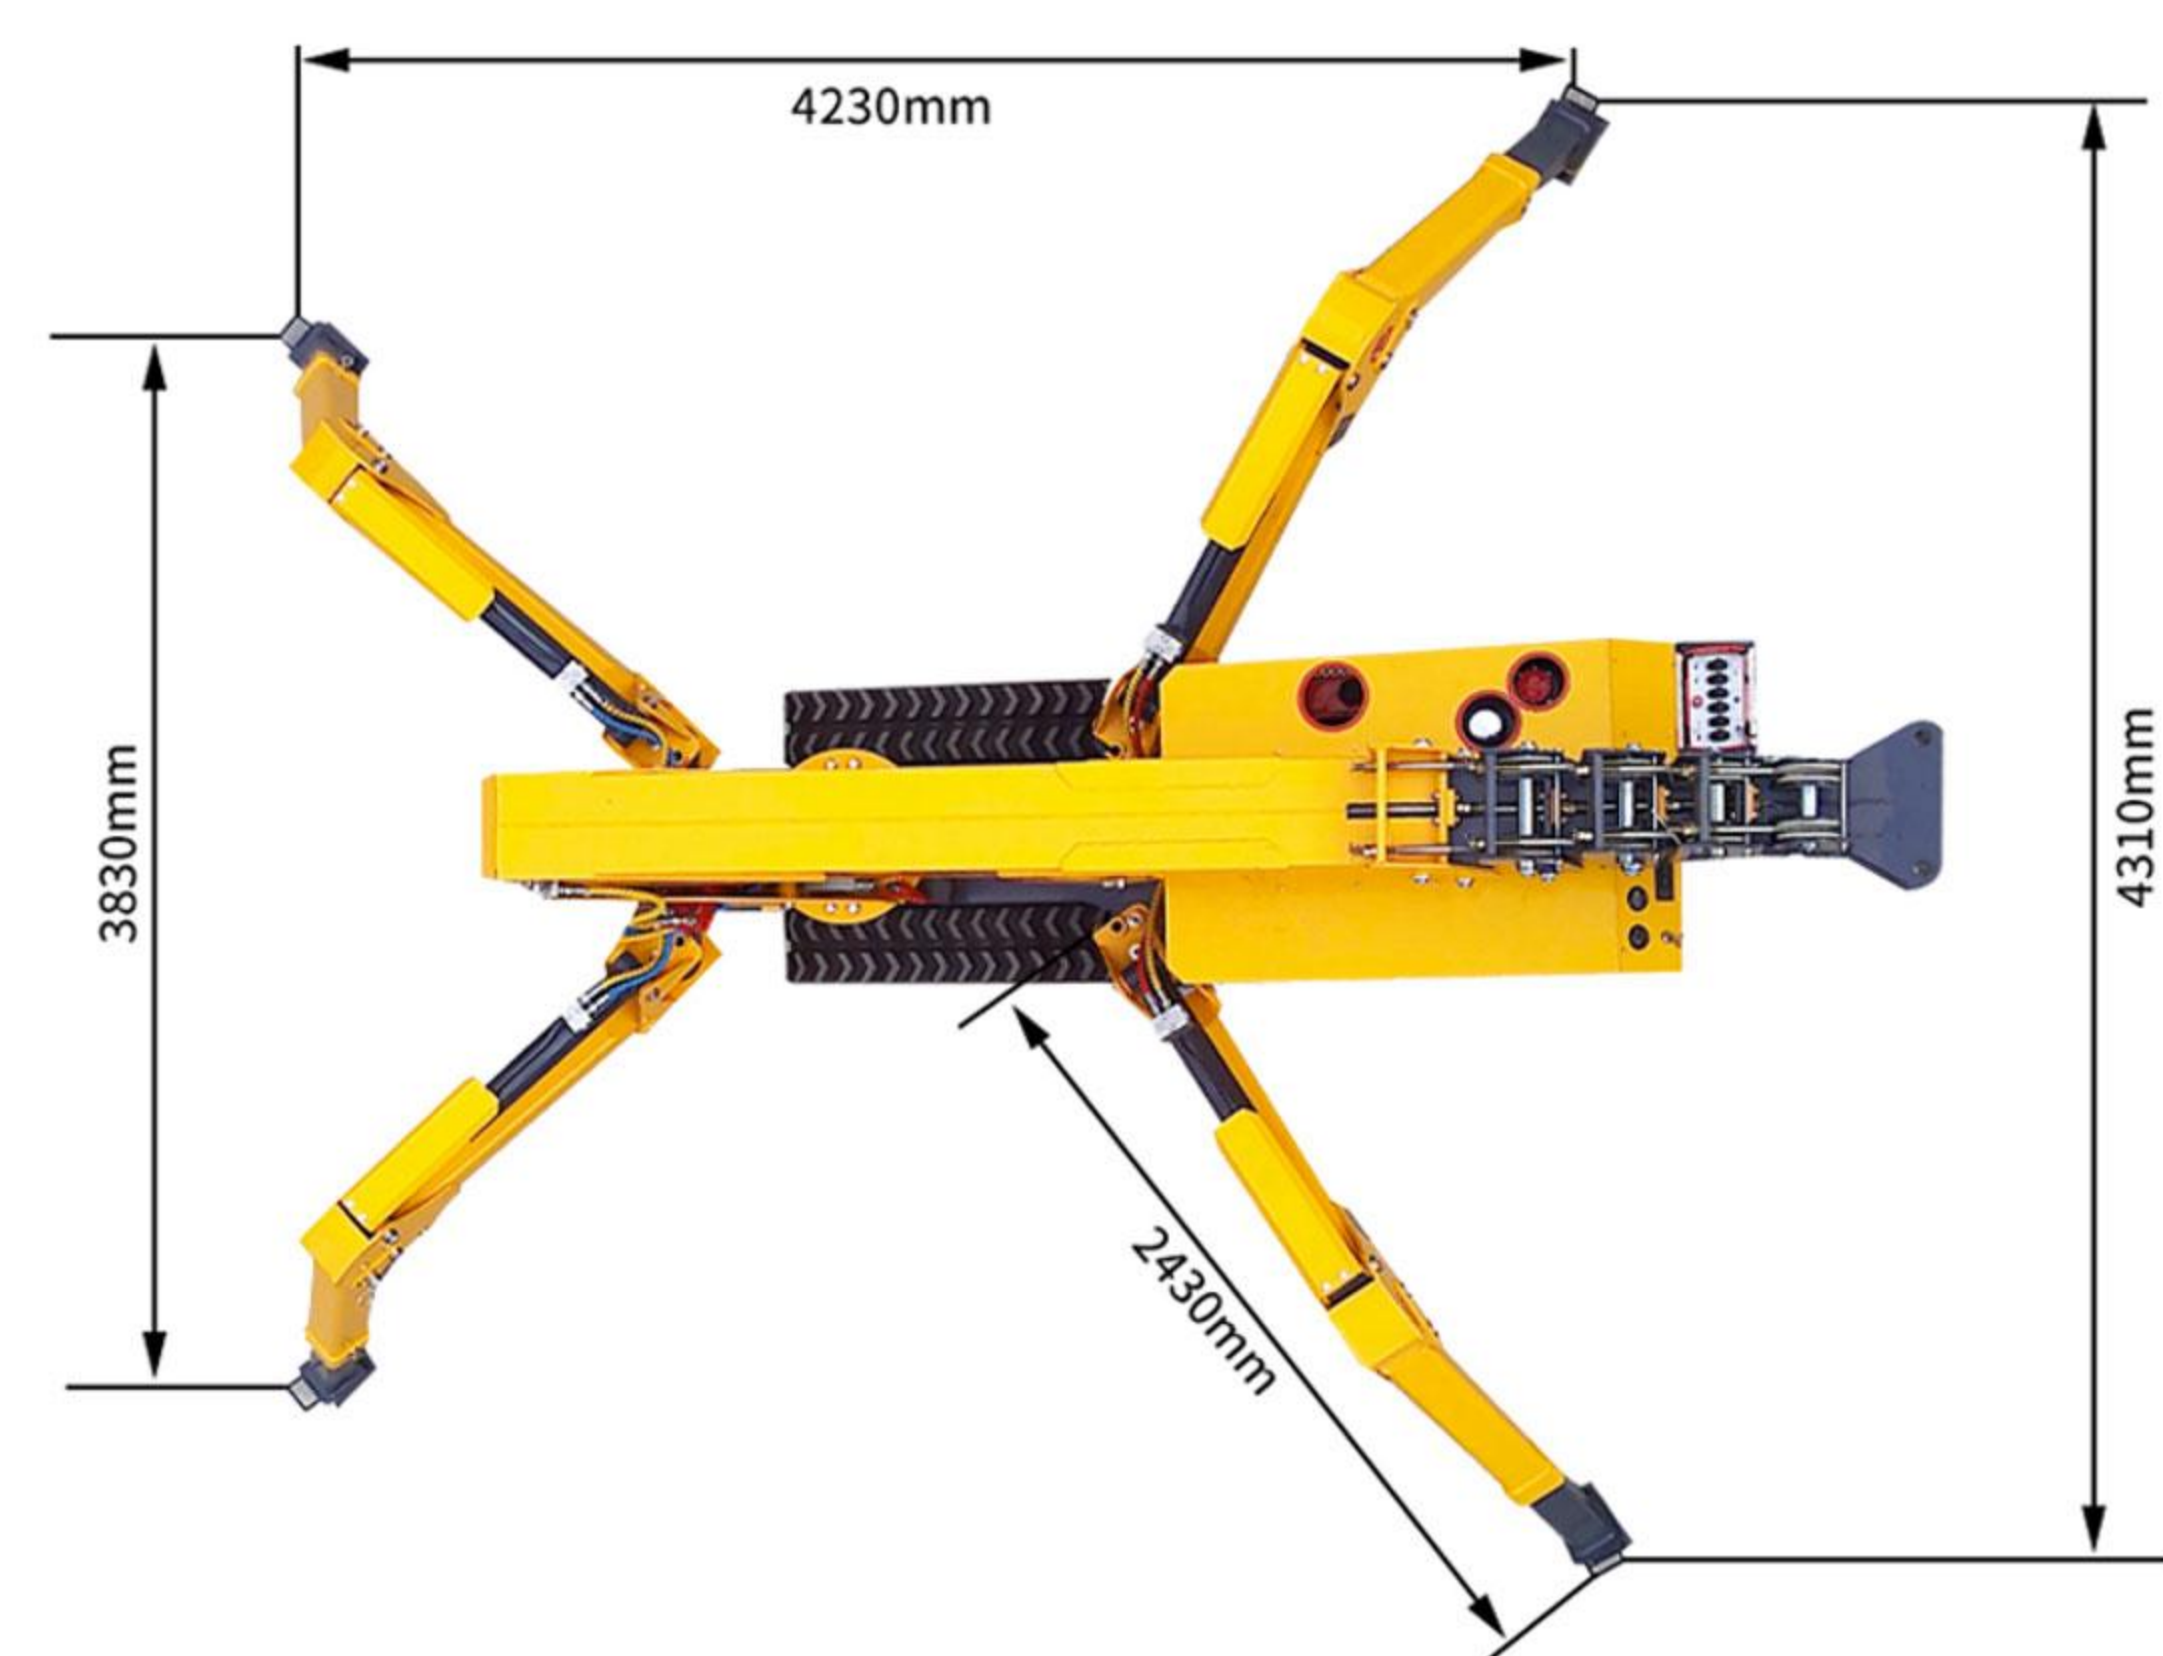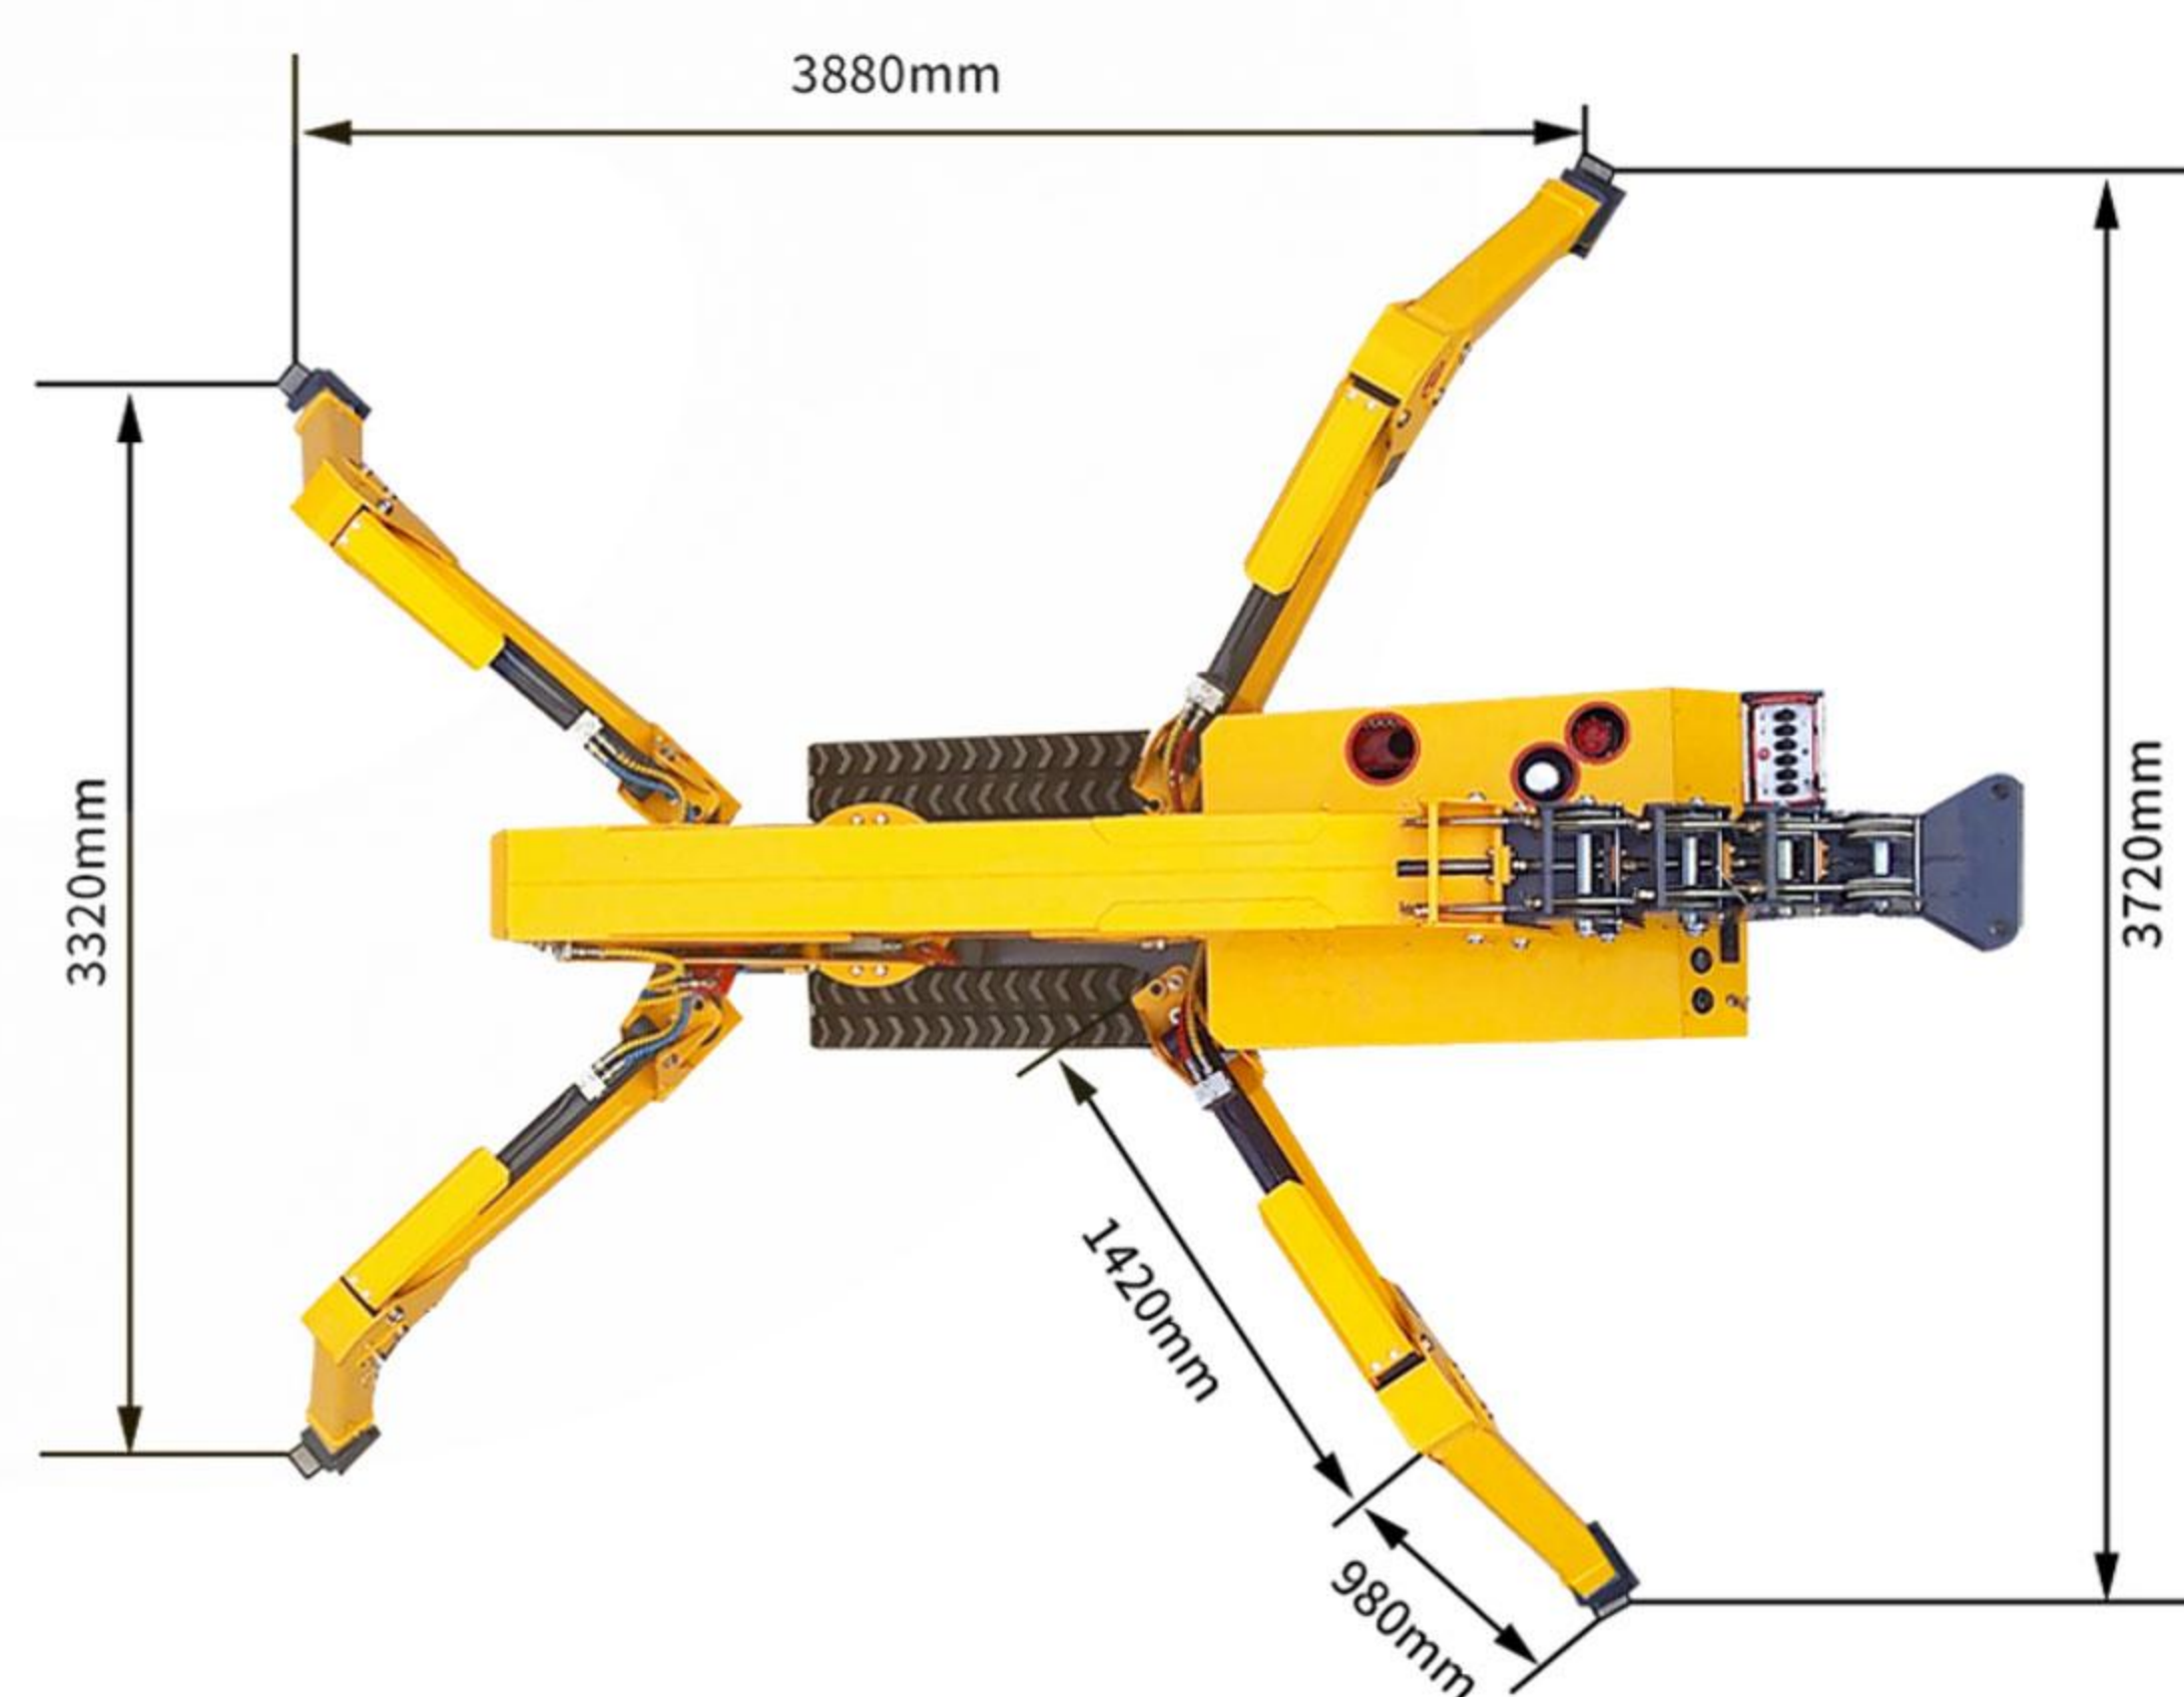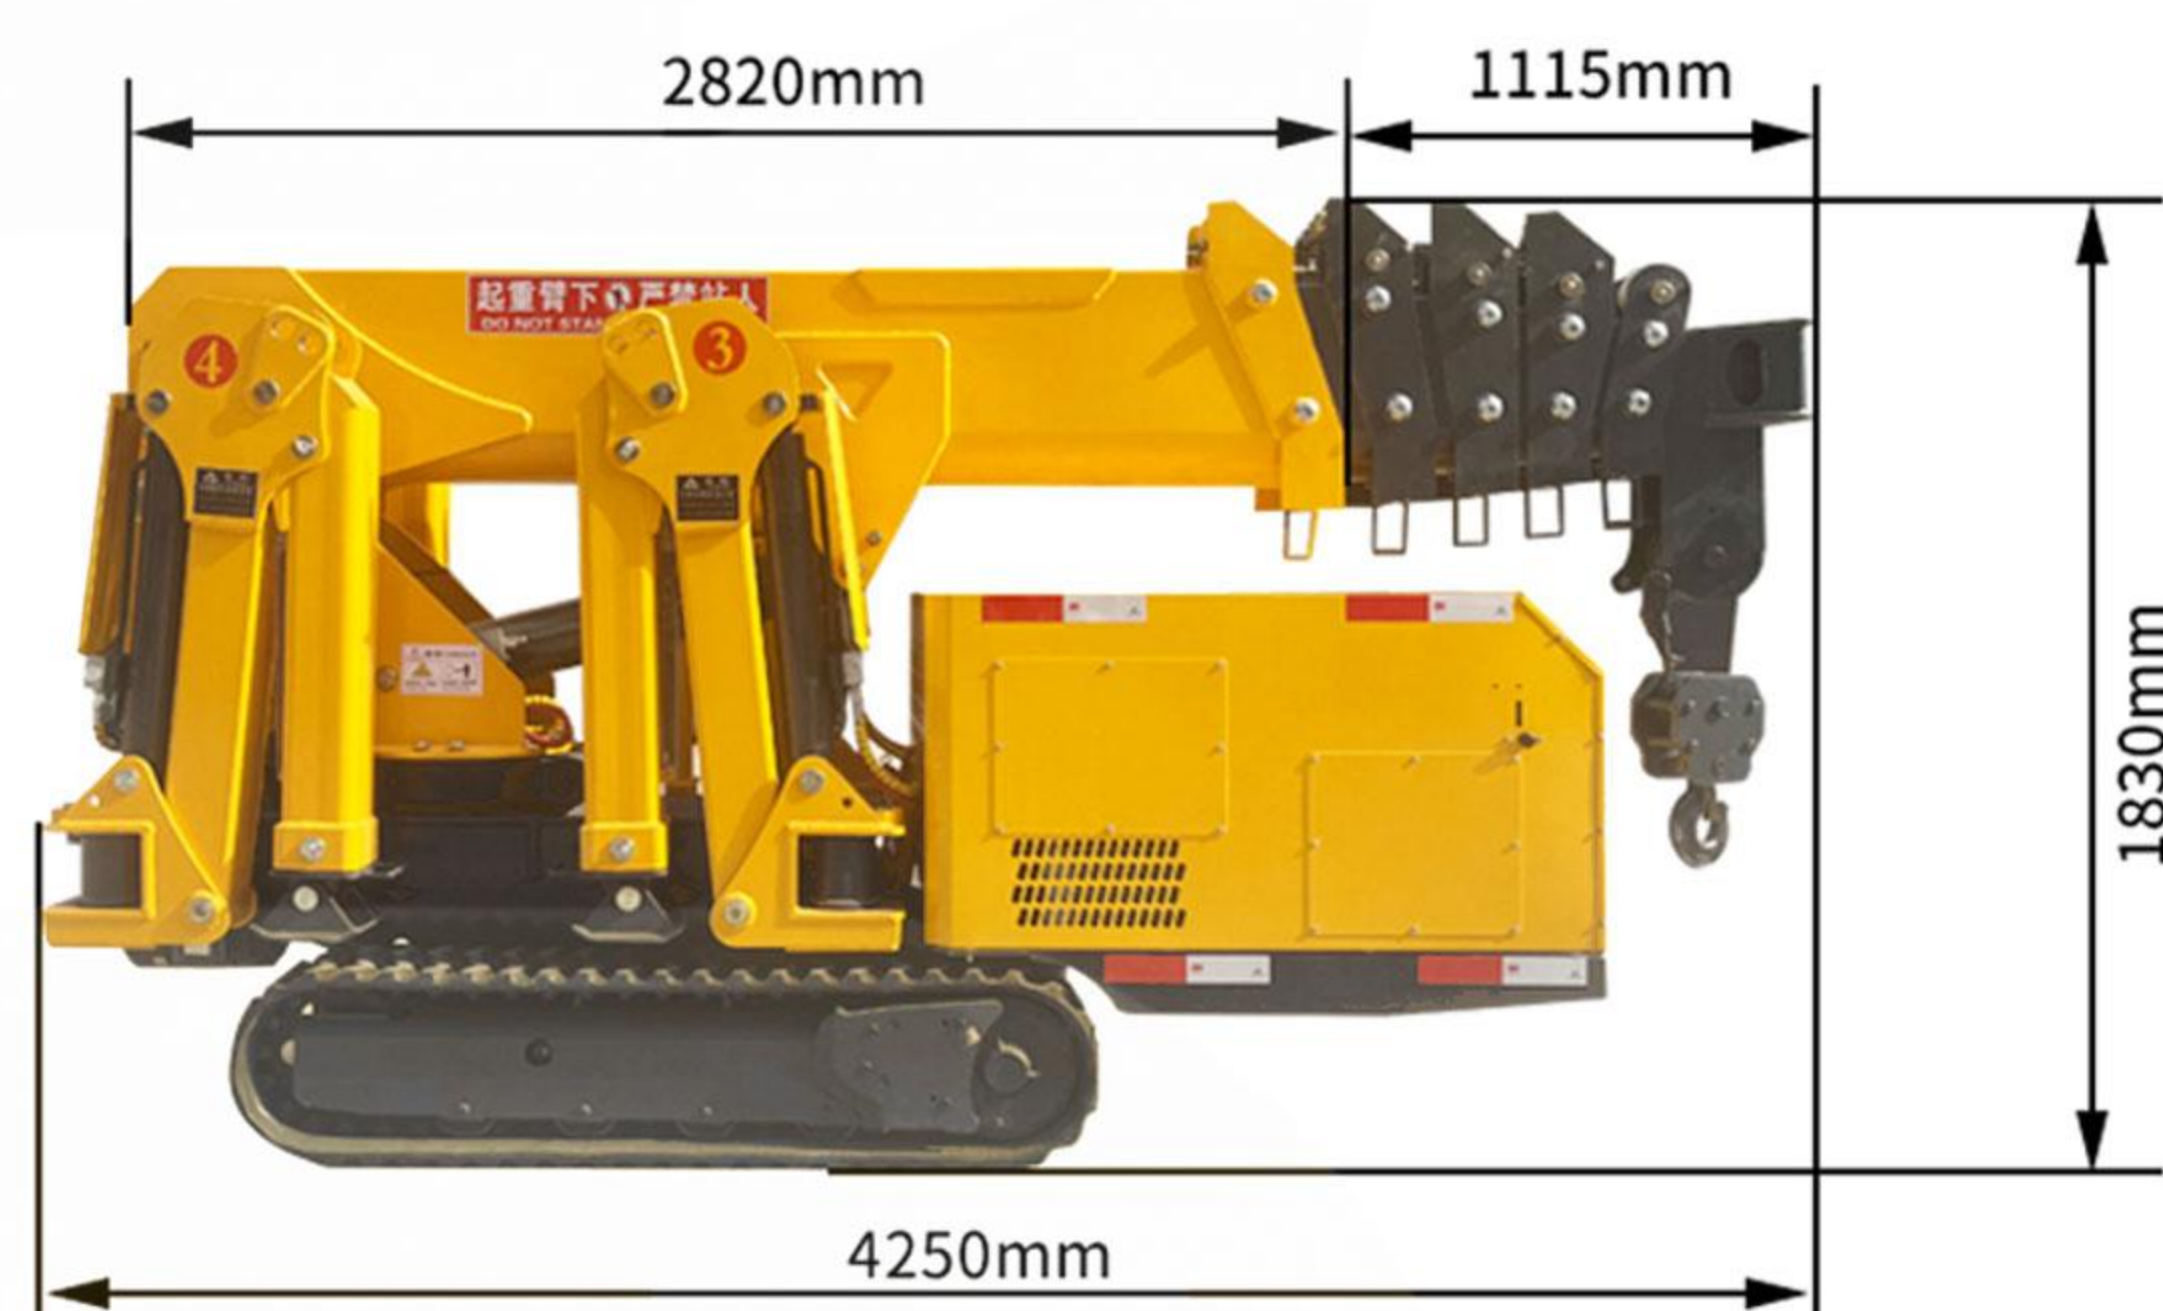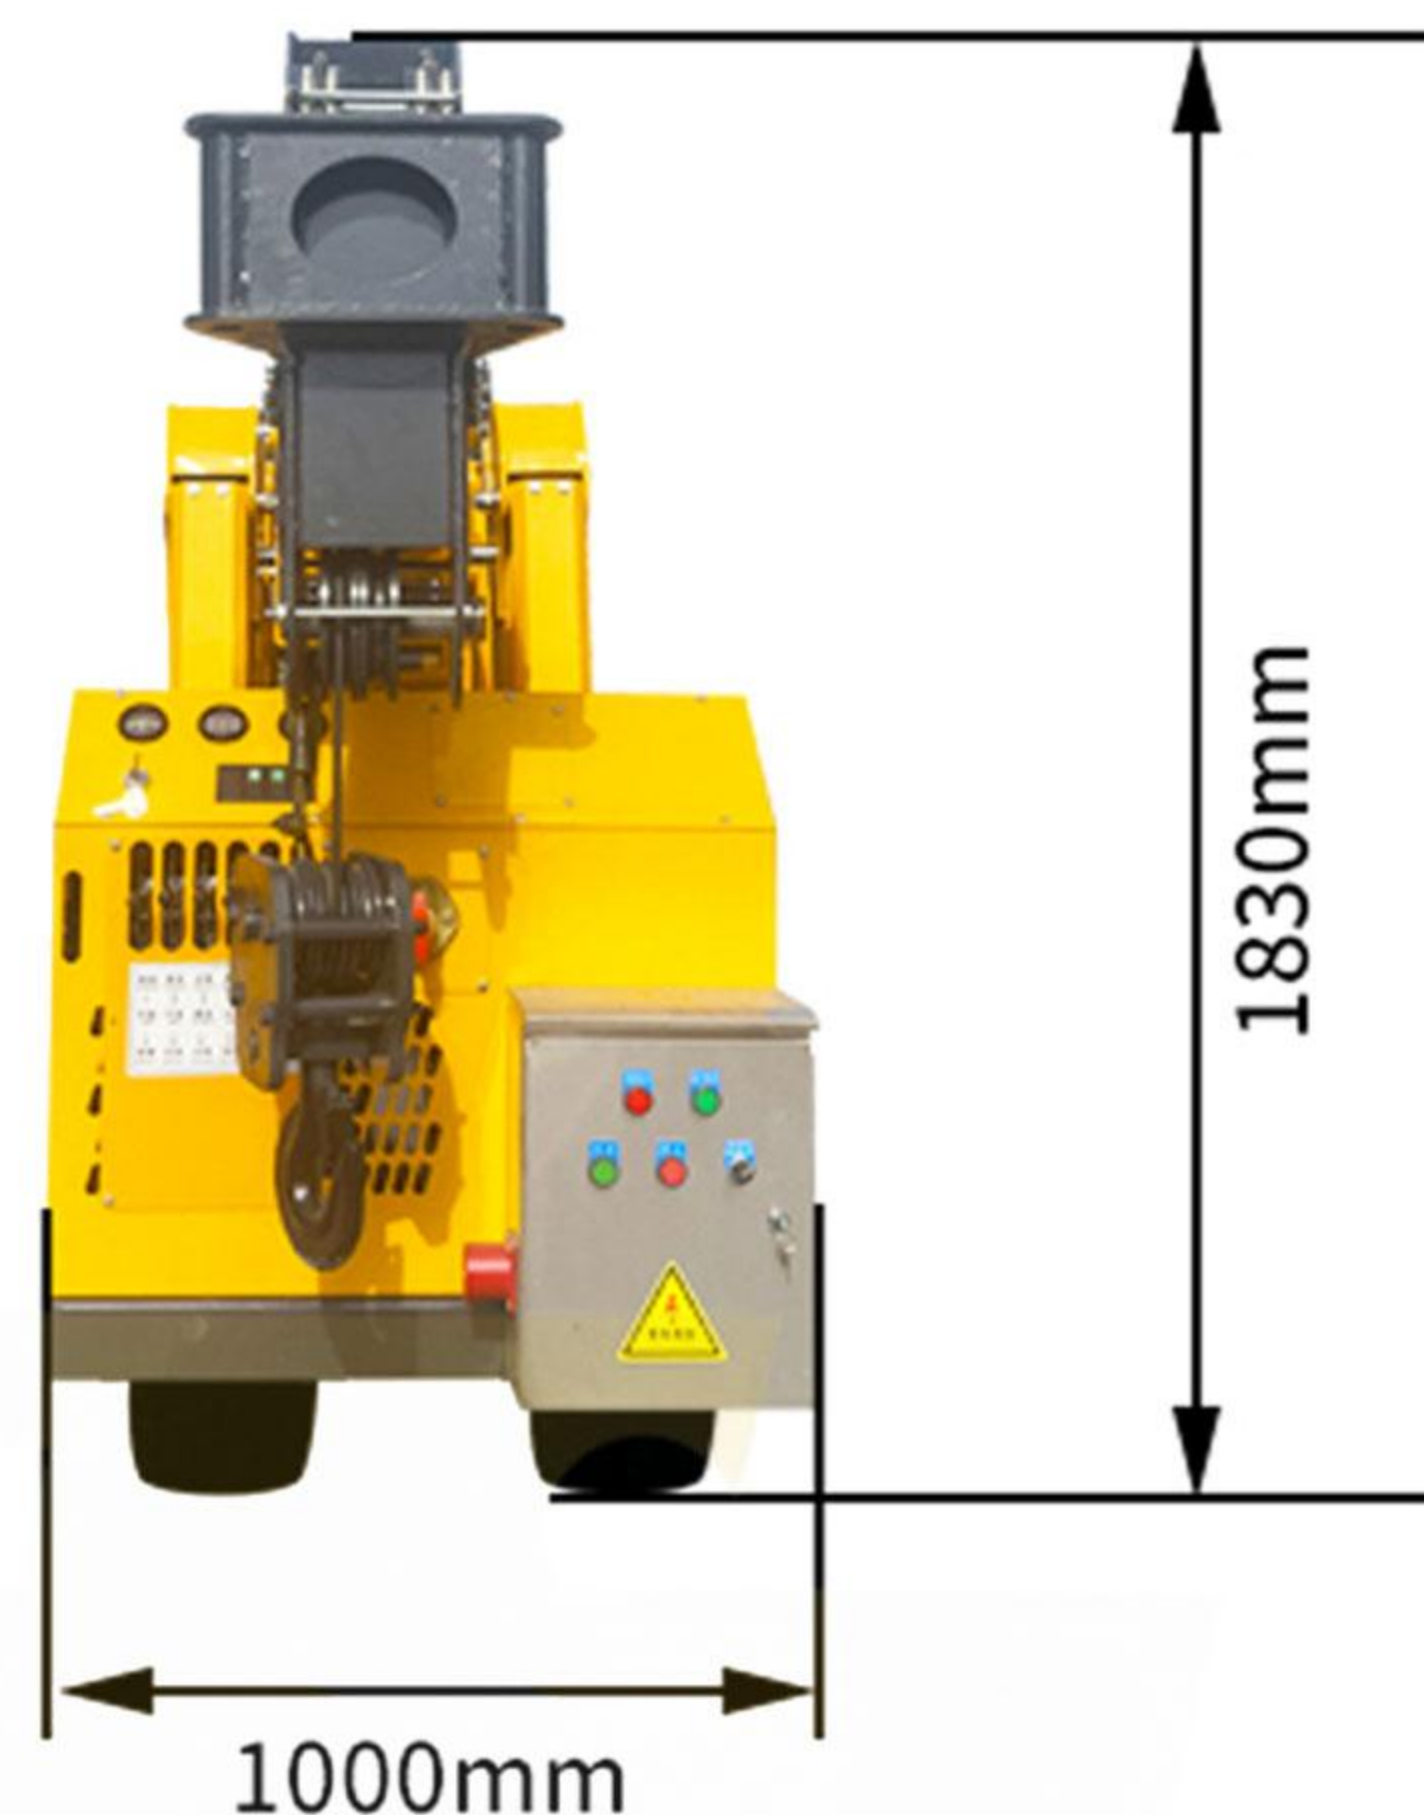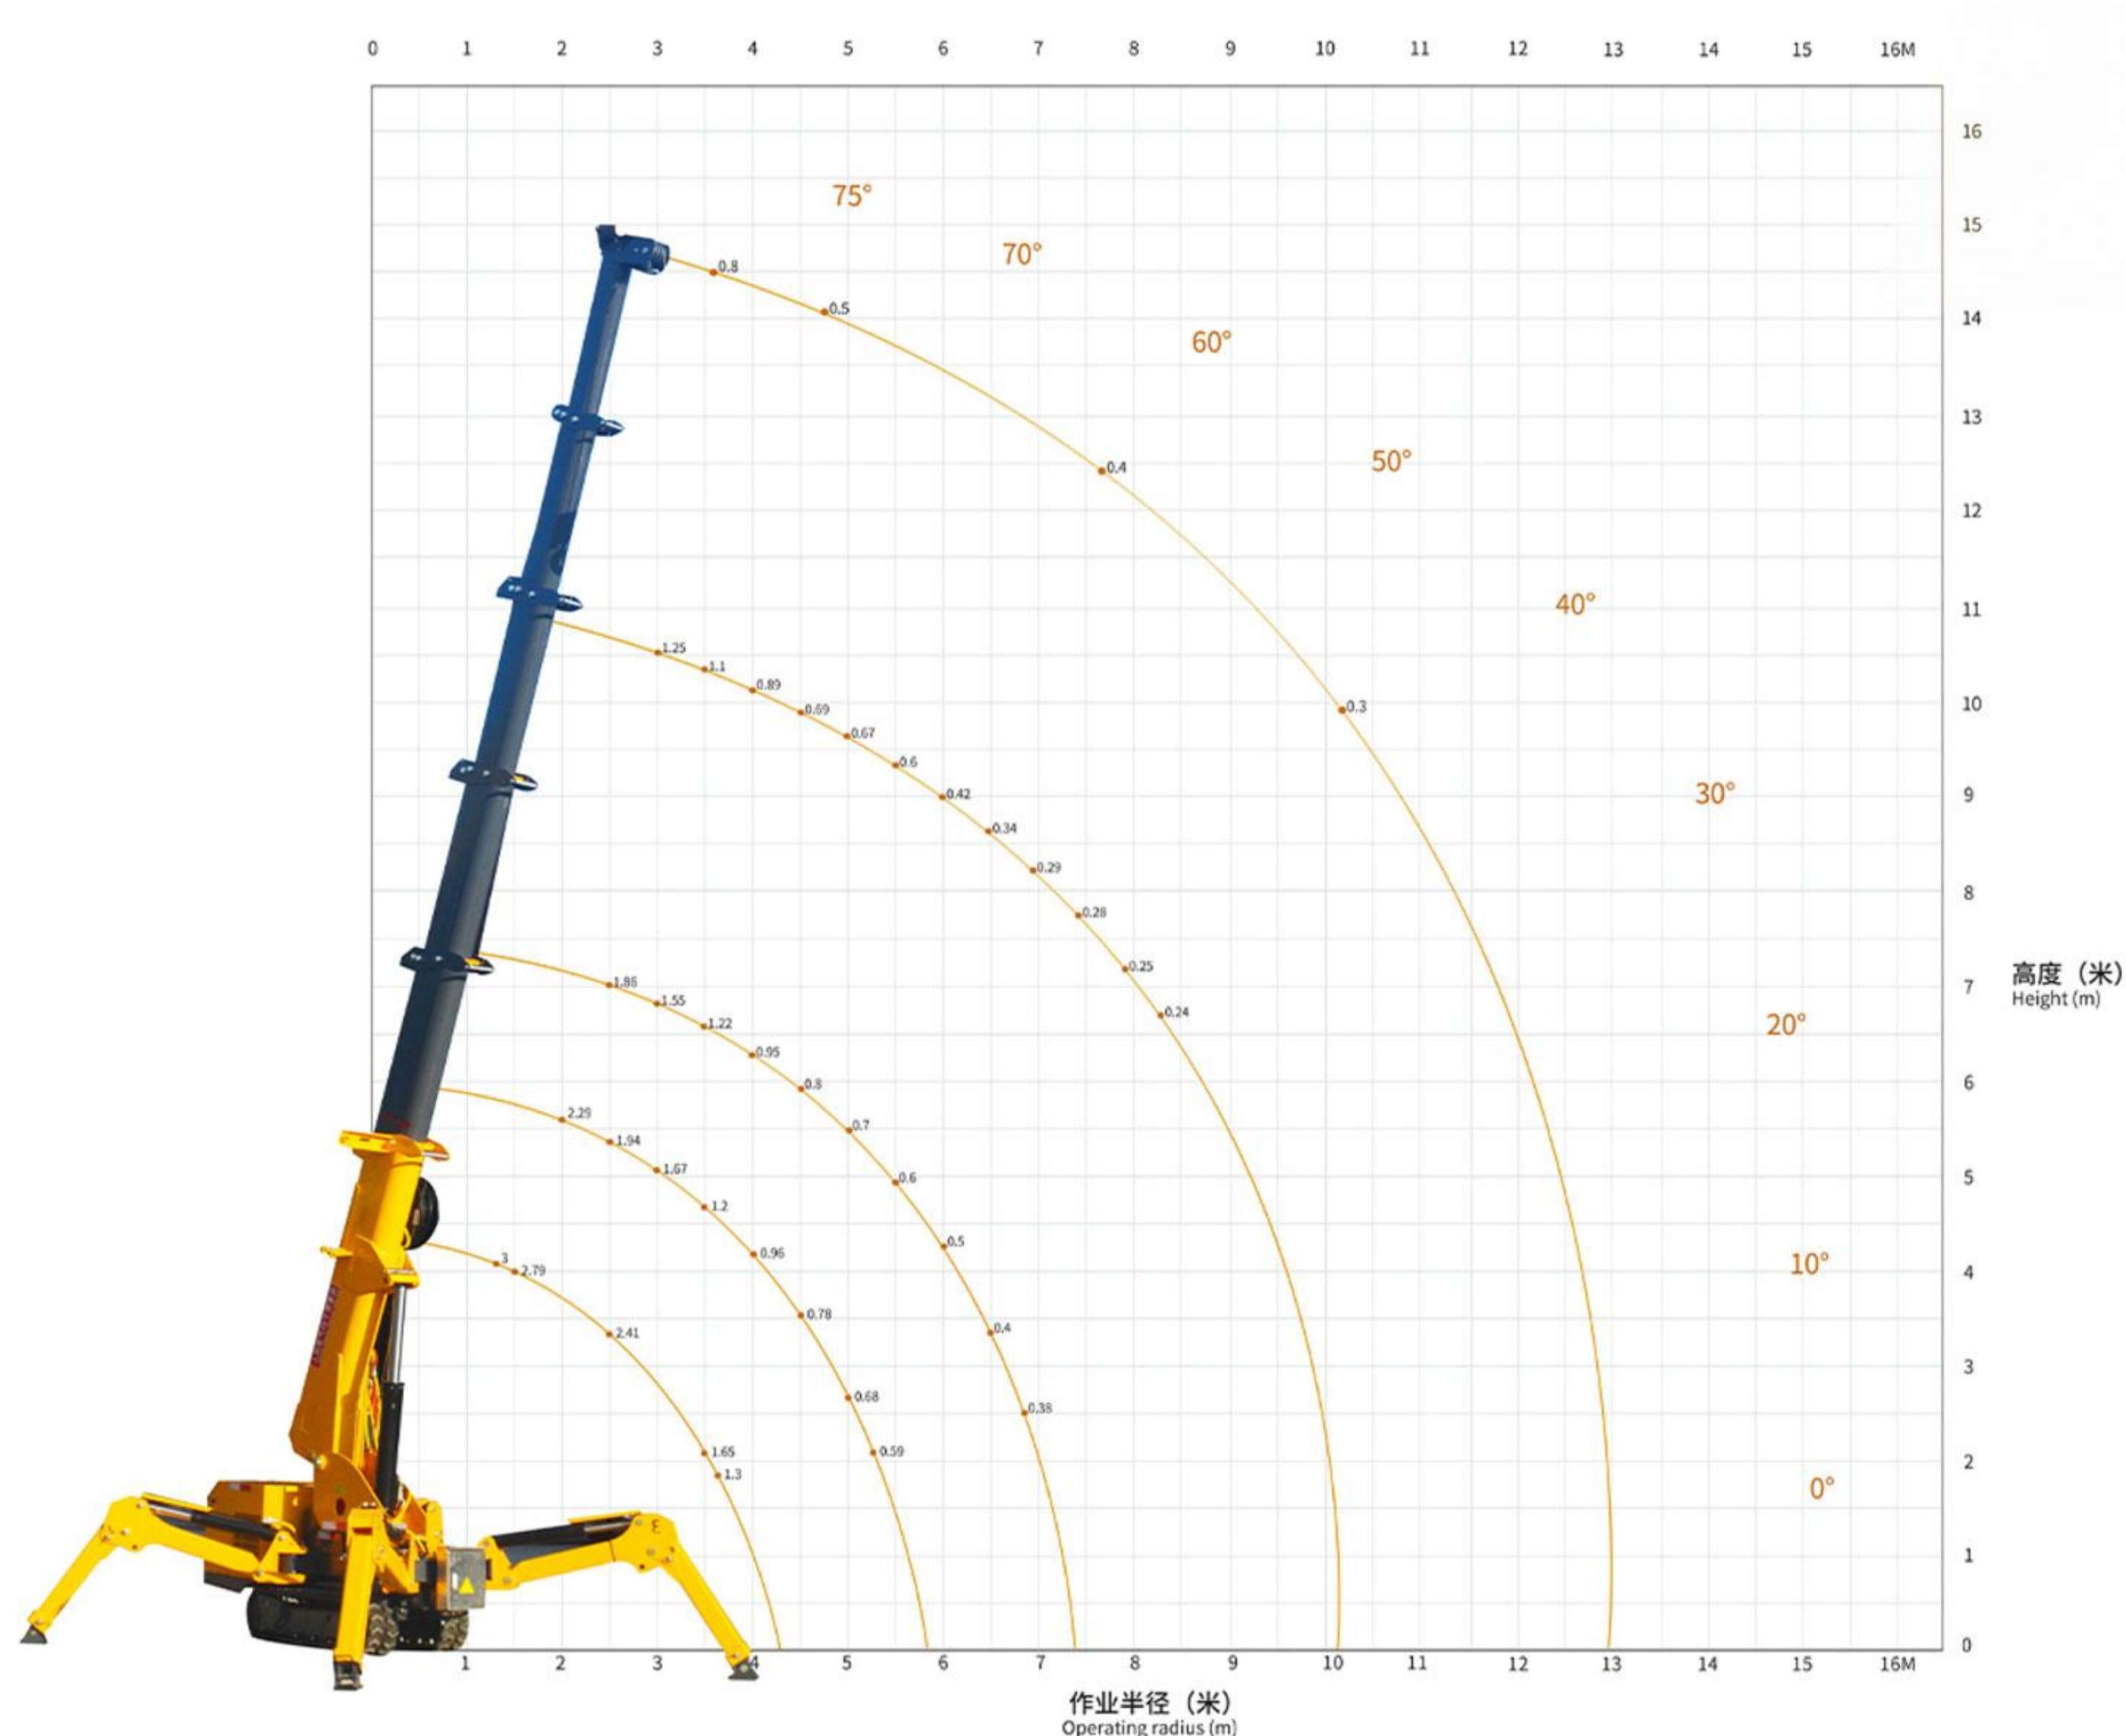

4吨蜘蛛吊机参数

4-ton Crawler Spider Crane

4T蜘蛛吊机 4T Spider Crane			
● 自重 (T) dead-weight (T)		3T	● 电机 Electrical Machinery
● 最大作业半径 Maximum operating radius		13m	● 发动机 engine
● 最大地上扬程 Maximum ground lift		15m	
● 卷扬装置 Winch device	● 吊钩上升速度 Hook lifting speed	0-8m/min (4绳) 0-8m/min (4 ropes)	
	● 钢丝绳规格 Specification of steel wire rope	Φ 8mm*45m	
● 伸缩装置 Telescopic device	● 吊臂形式 Boom form	3m×6段吊臂 (可定制) 3m×6-section lifting arm (Support customization)	
	● 吊臂长/时间 Boom length/time	3.1m-15m/20sec (可调节) 3.1m-15m/20sec (adjustable)	
● 变幅装置 Luffing device	● 吊臂角度/时间 Boom angle/time	0-78°/13sec	
● 回旋装置 gyroscope	● 回转角度/速度 Rotation angle/speed	0-360°(连续) /60sec 0-360° (continuous)/60sec	
● 支腿 Outrigger	● 支腿动作形式 Outrigger movement form	手动旋出+液压支撑(三节支腿可伸缩) Manual screw out + hydraulic support (three-section legs retractable)	
	● 最大伸出幅度 (mm) Maximum extension amplitude (mm)	4230 (长) X3830 (后) X4310 (前) 4230 (length) X3830 (rear) X4310 (front)	
● 行走装置 running gear	● 行走方式 Walking mode	液压驱动 hydraulic drive	● 标准配置 Standard configuration
	● 行走速度 Walking speed	0-2.5km/h	● 整车尺寸 Vehicle Size
	● 爬坡能力 Gradeability	25°(36%)	● 履带(mm) Track (mm)
● 可选装 Optional		可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black	
			● 电压 voltage
			● 生产方 Manufacturer
			● 型号 model number
			● 启动方式 start mode
			● 启动性能 start performance
			● 燃料/容积 Fuel/Volume
			● 电池容量 Battery capacity
			● 燃油消耗率 Fuel consumption rate
			● 噪声等级 noise level
			● 操作种类(吊臂/支腿)手动行走 Operation type (boom/leg), manual walking
			● 操作系统 operating system
			● 操作特性 Operational Characteristics
			● 柴油机和电机 (双动力) Diesel engine and electric motor (dual power)
			长4.25米, 宽1米, 高1.83米 4.25meters length, 1meters width, and 1.83meters height
			230(宽)72(节距)53(节) 230 (width) 72 (pitch) 53 (section)

4T蜘蛛吊润滑部位图

4T spider crane lubrication parts diagram

注:转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / "Whenever the jibs are out, grease the jibs."

润滑点标记颜色	润滑周期	润滑方法	润滑油种类
红色	每周	油枪注入/涂抹	硫化钼重型机油膏
绿色 (发动机机油)	100小时	换油	SI10W-30机油
黄色 (减速机)	100小时	涂抹	CKC220矿物质齿轮油

This product is strictly prohibited from being exposed to rain.

本产品严禁雨淋

液压飞臂

Hydraulic Flying Arm

力矩显示器

Torque Indicator

吊篮

gondola (of cable car)


无线遥控器

wireless remote





5吨蜘蛛吊机 5-ton spider crane

● 性能特点 Performance Characteristics

- 橡胶履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 机身紧凑,占用空间小。适用范围广泛
- 安全设计 可防止错误操作
- 可加遥控装置 操作便捷
- Rubber tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- The body of the machine is compact and takes up little space. Wide range of application
- Safe design prevents incorrect operation
- Remote control can be added for easy operation

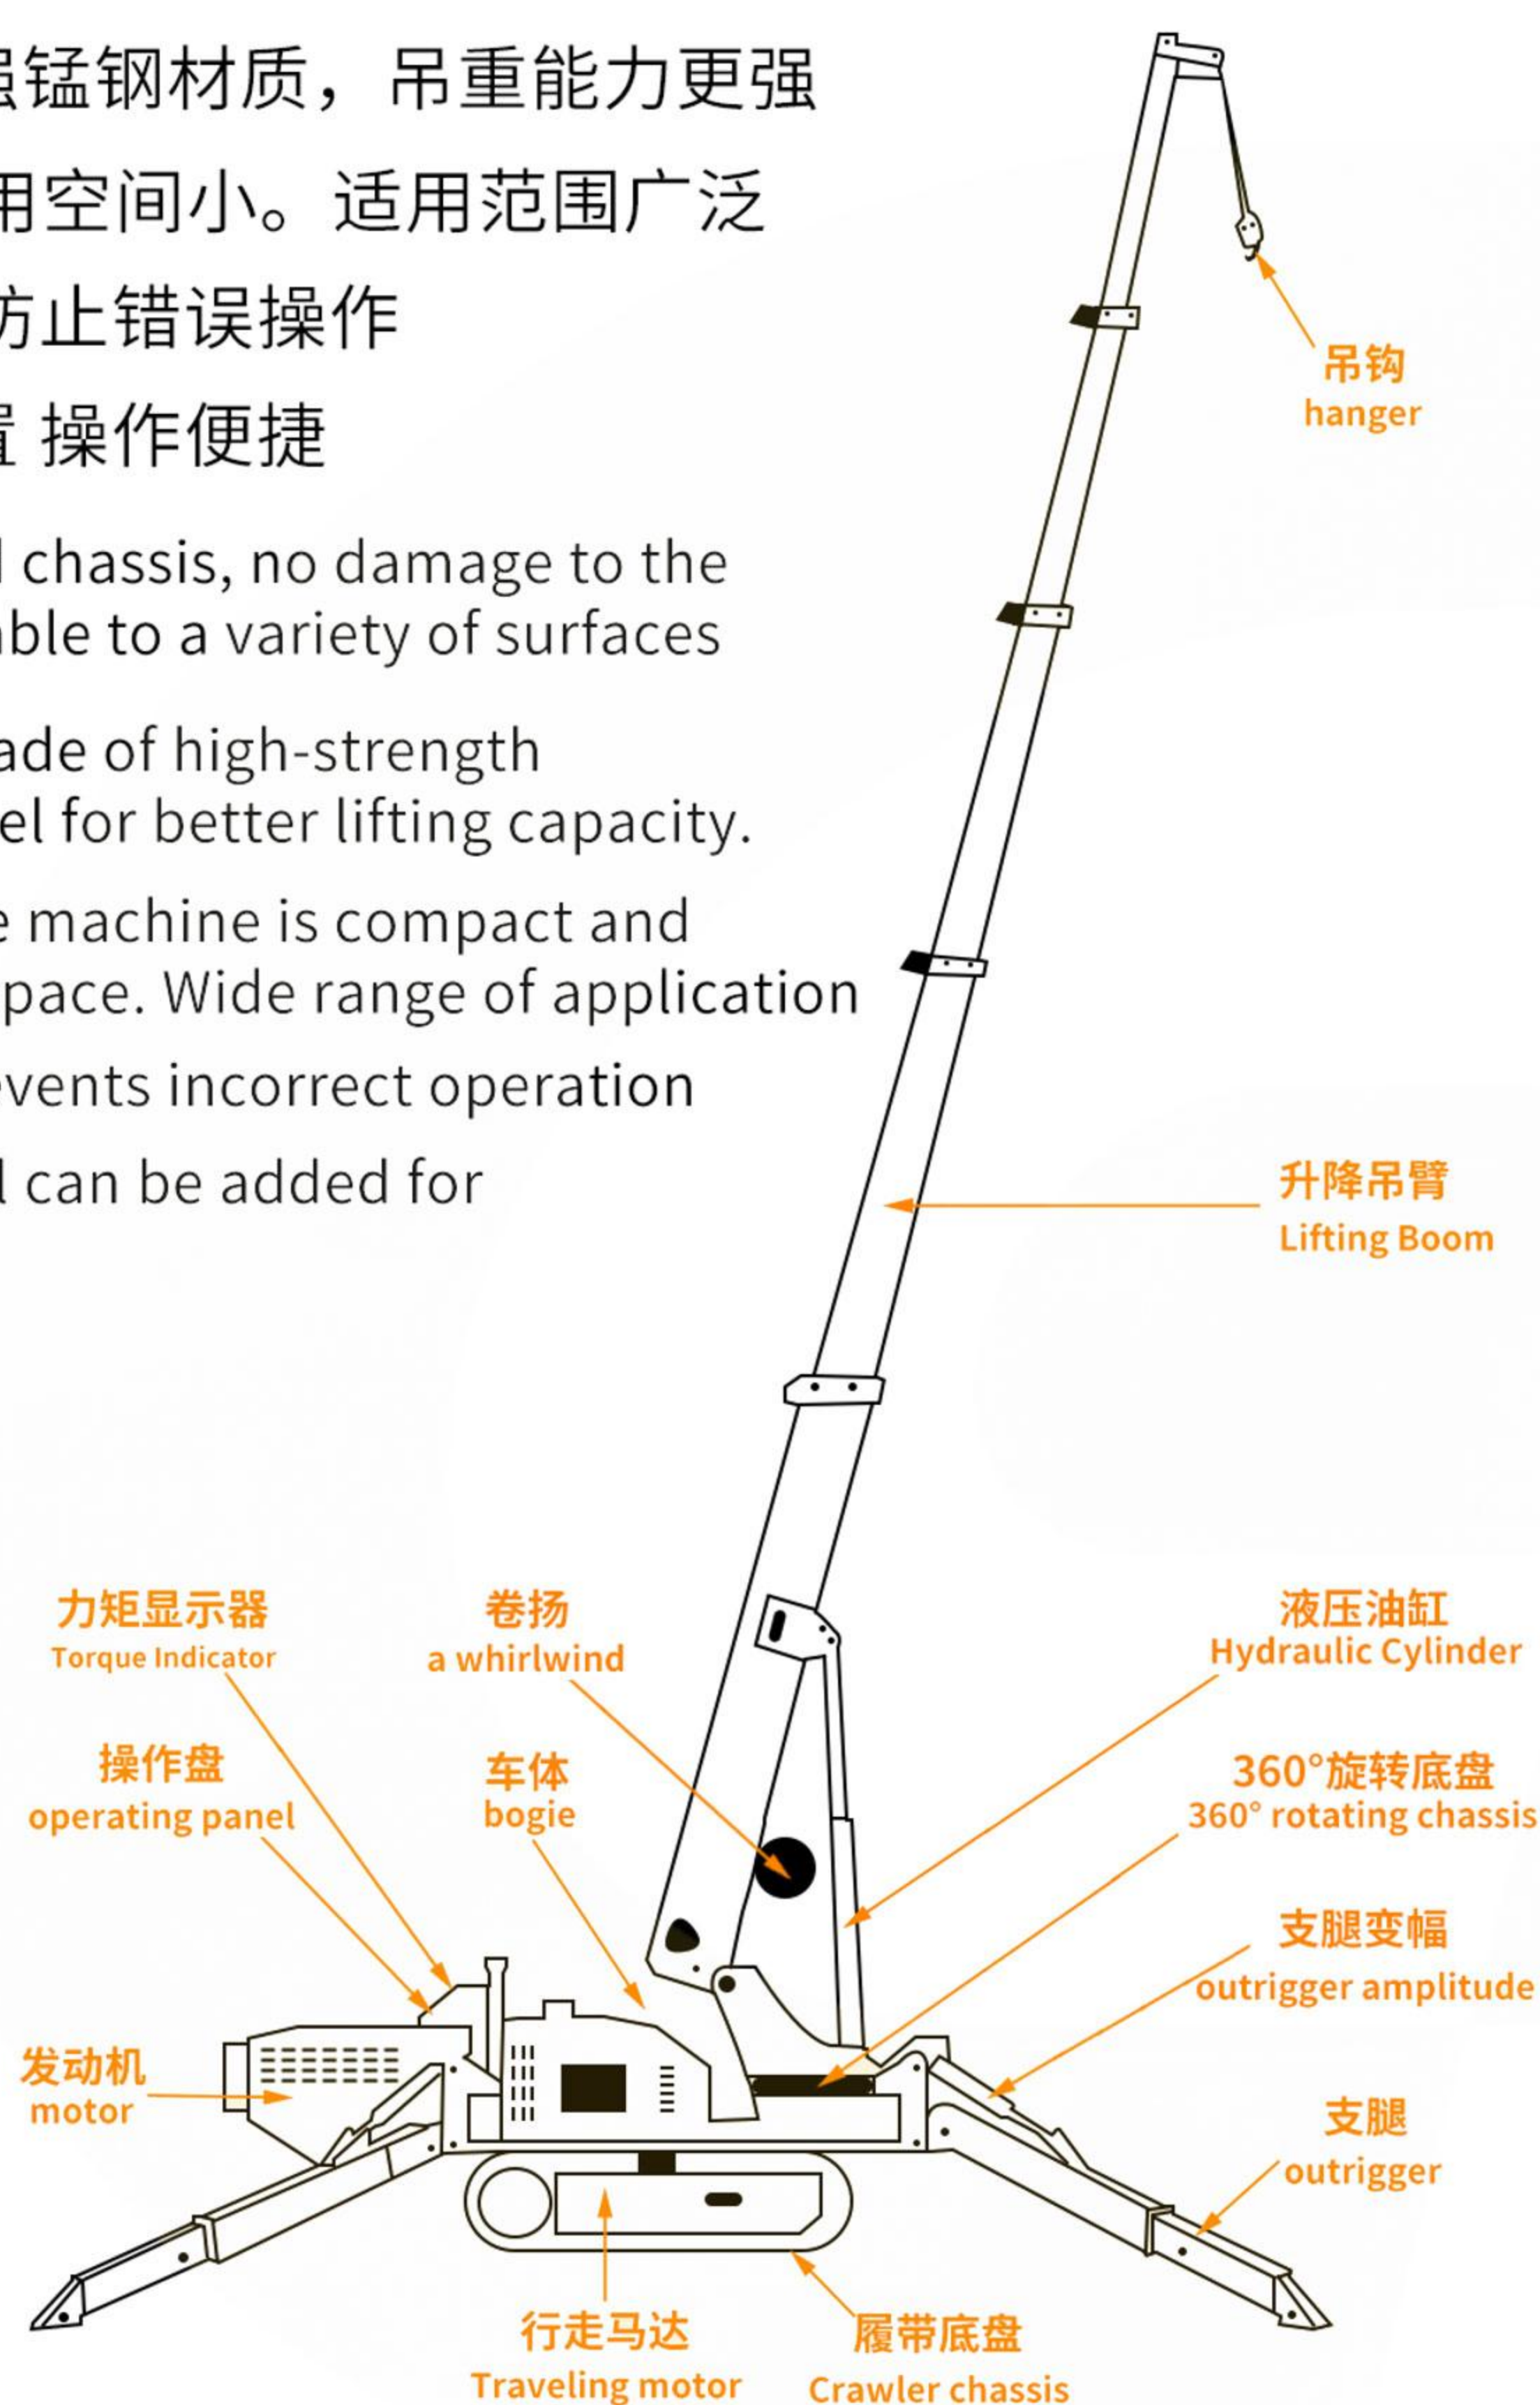

5吨蜘蛛吊机吊重表
5 ton spider crane lifting weight chart

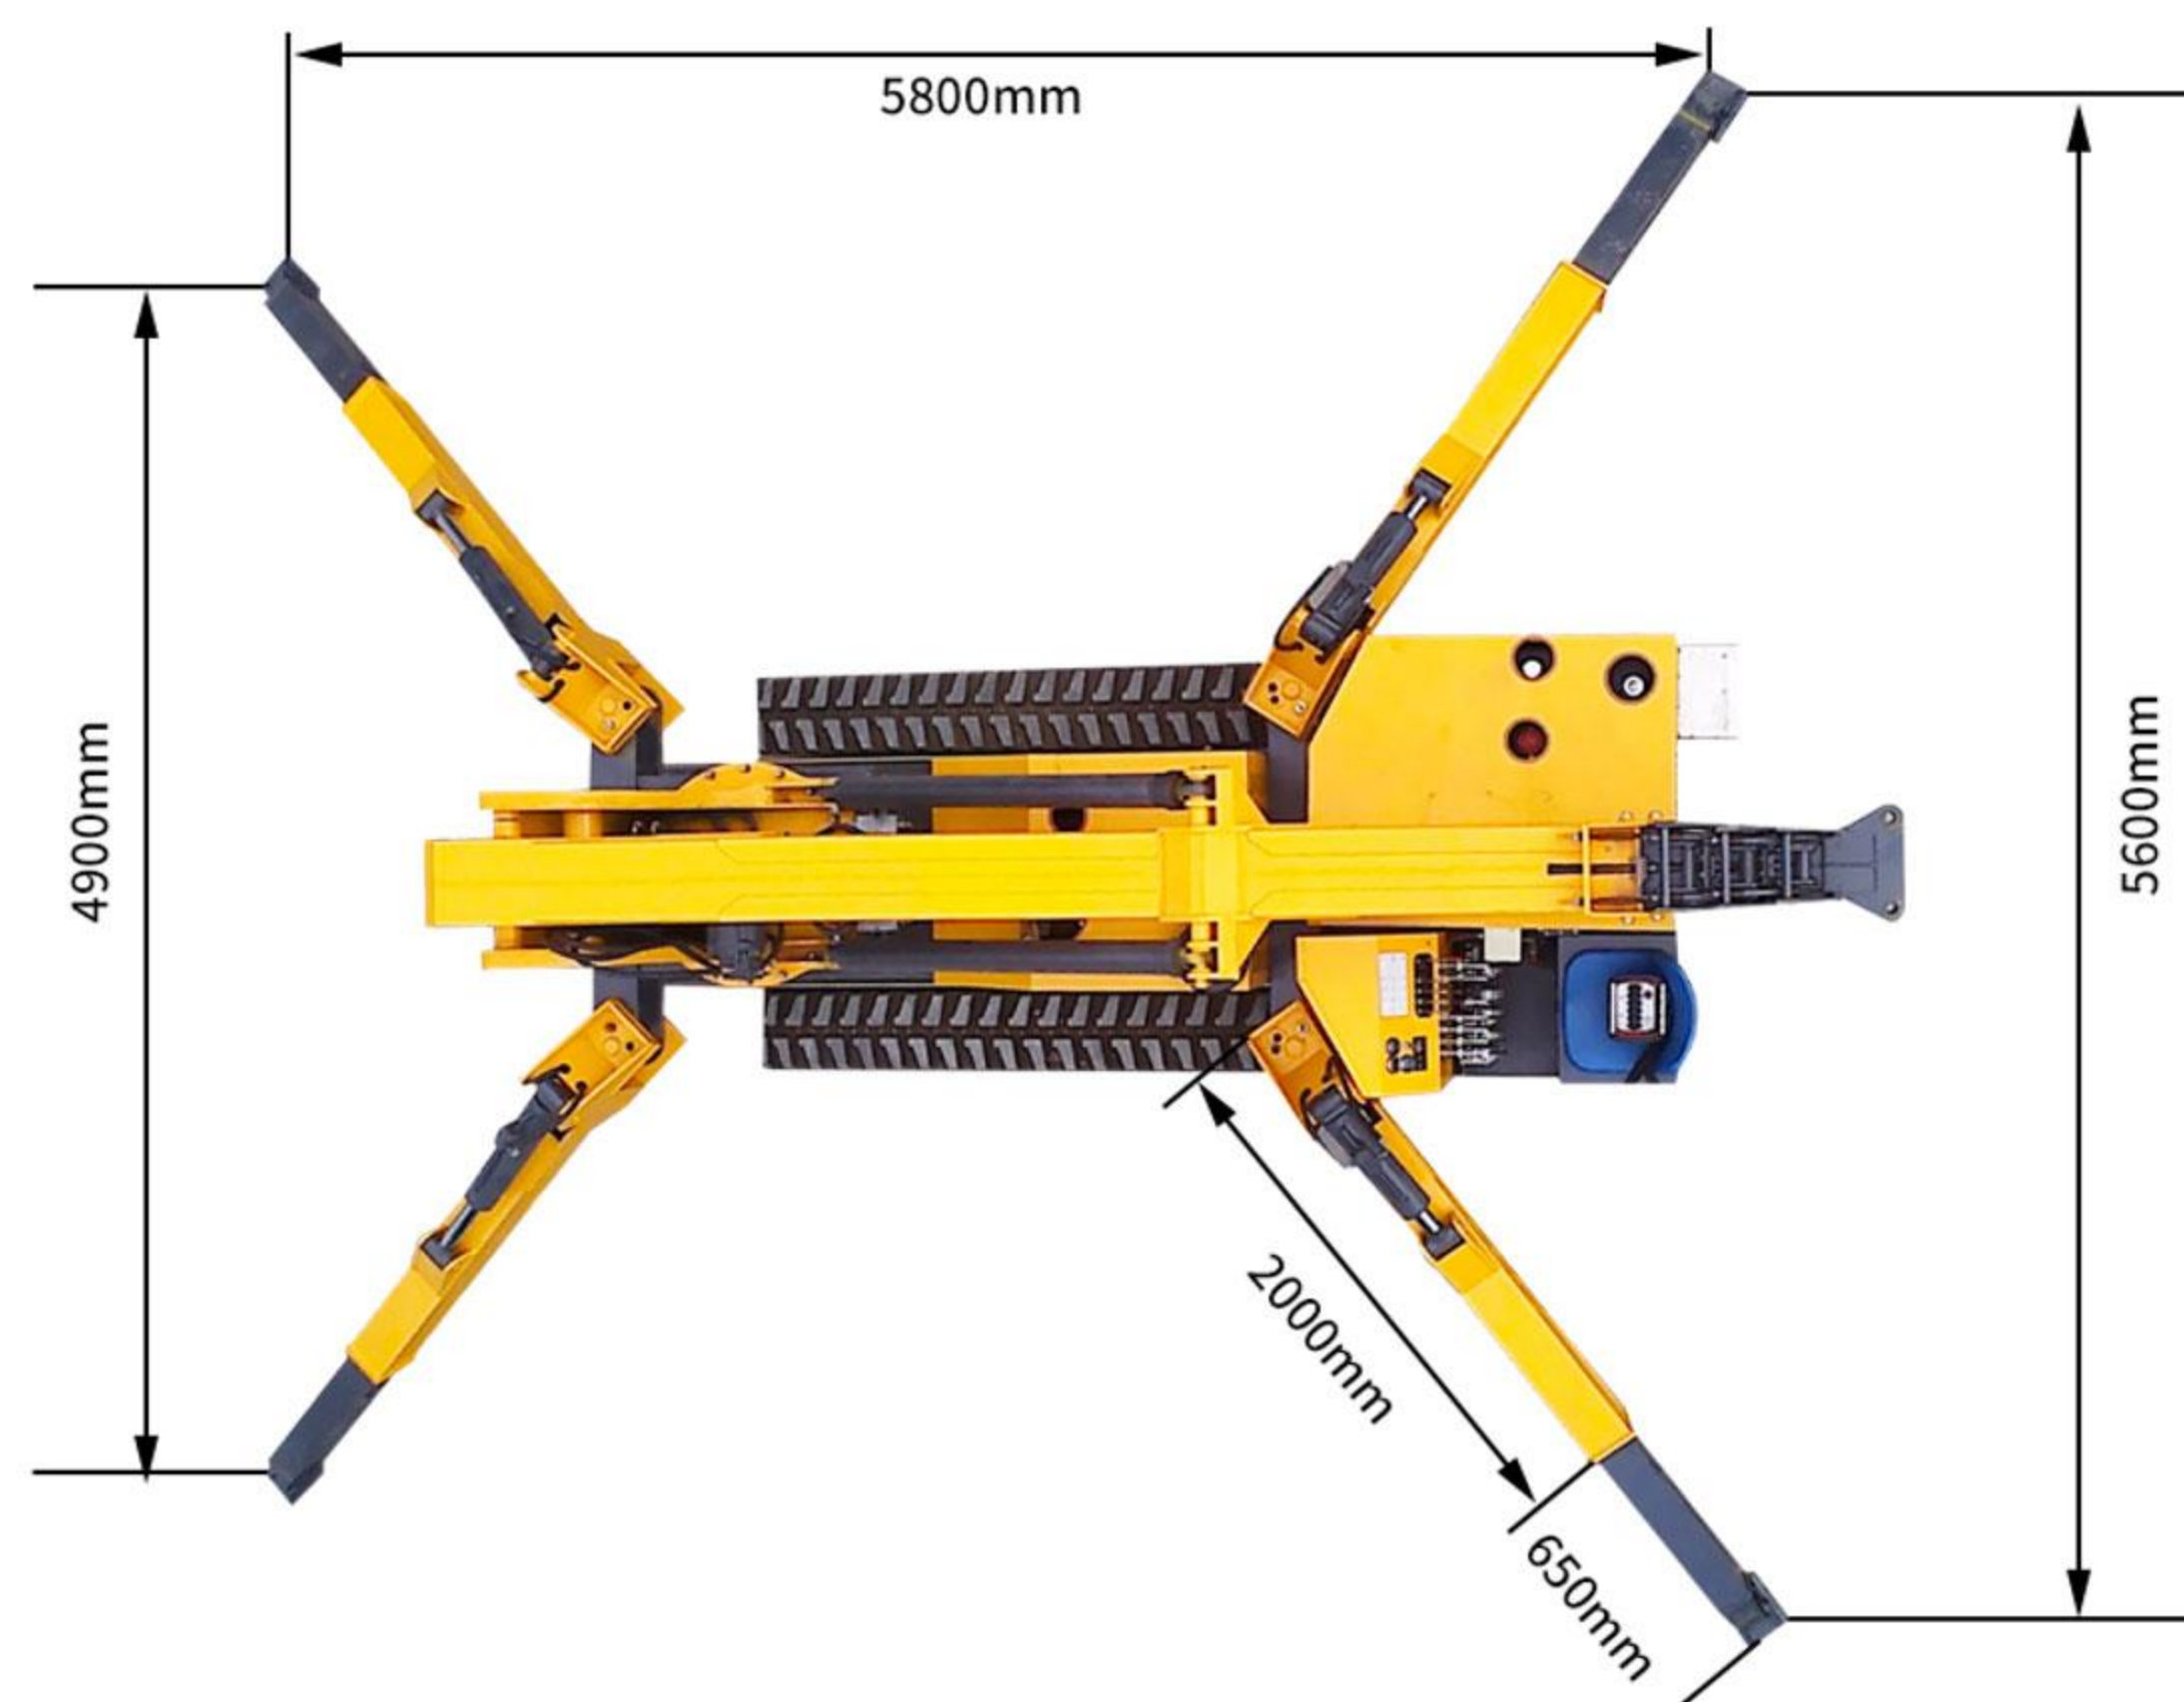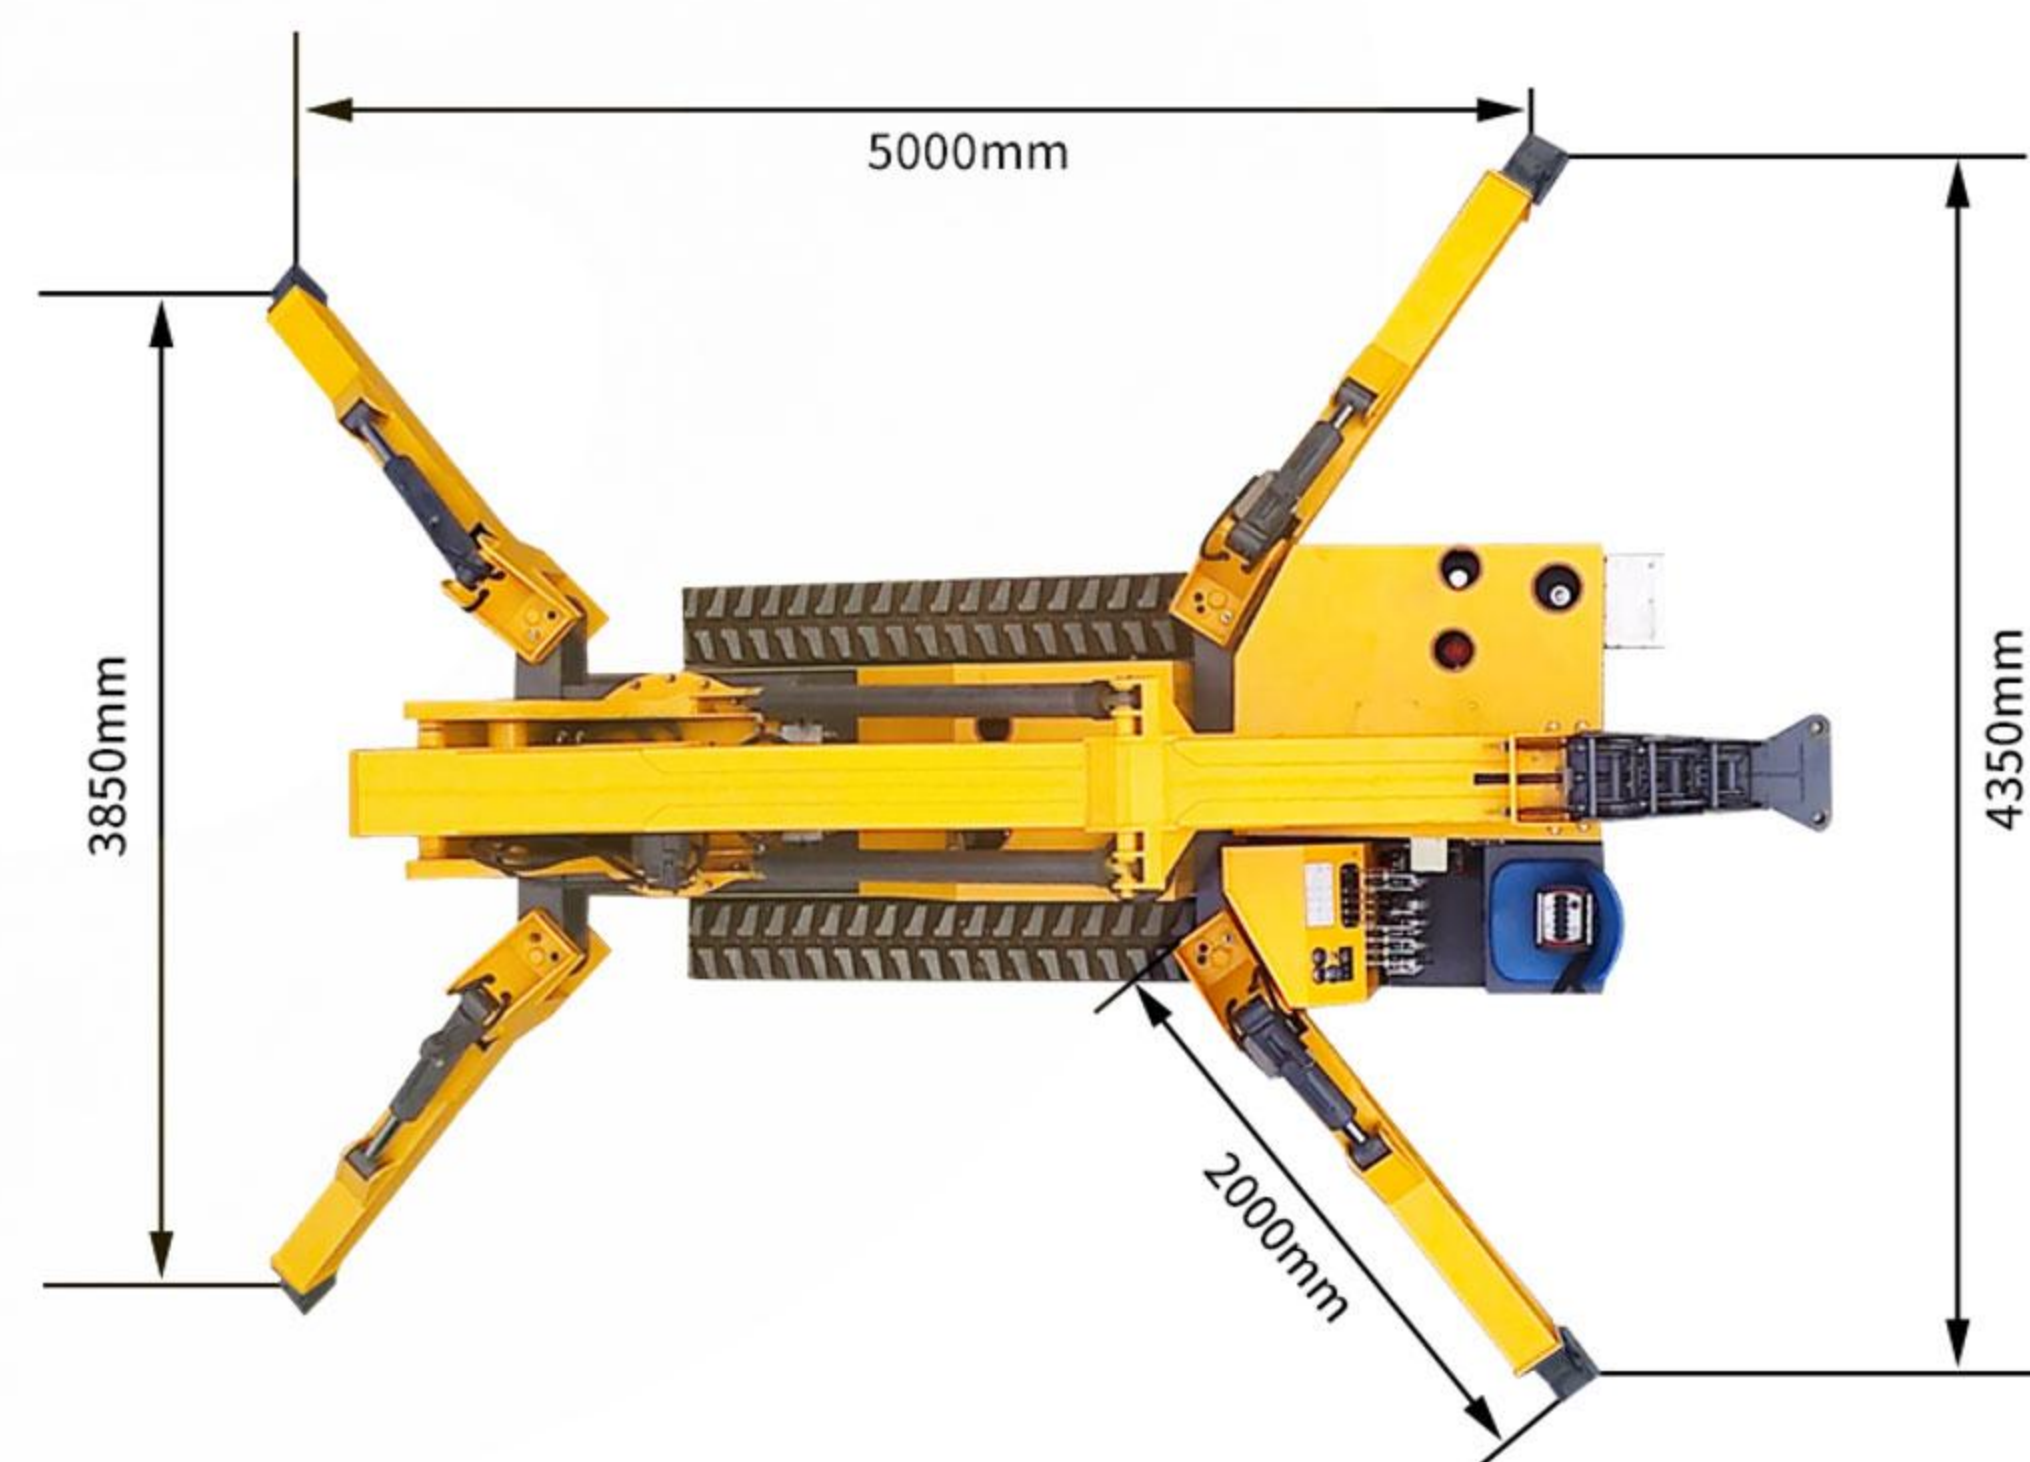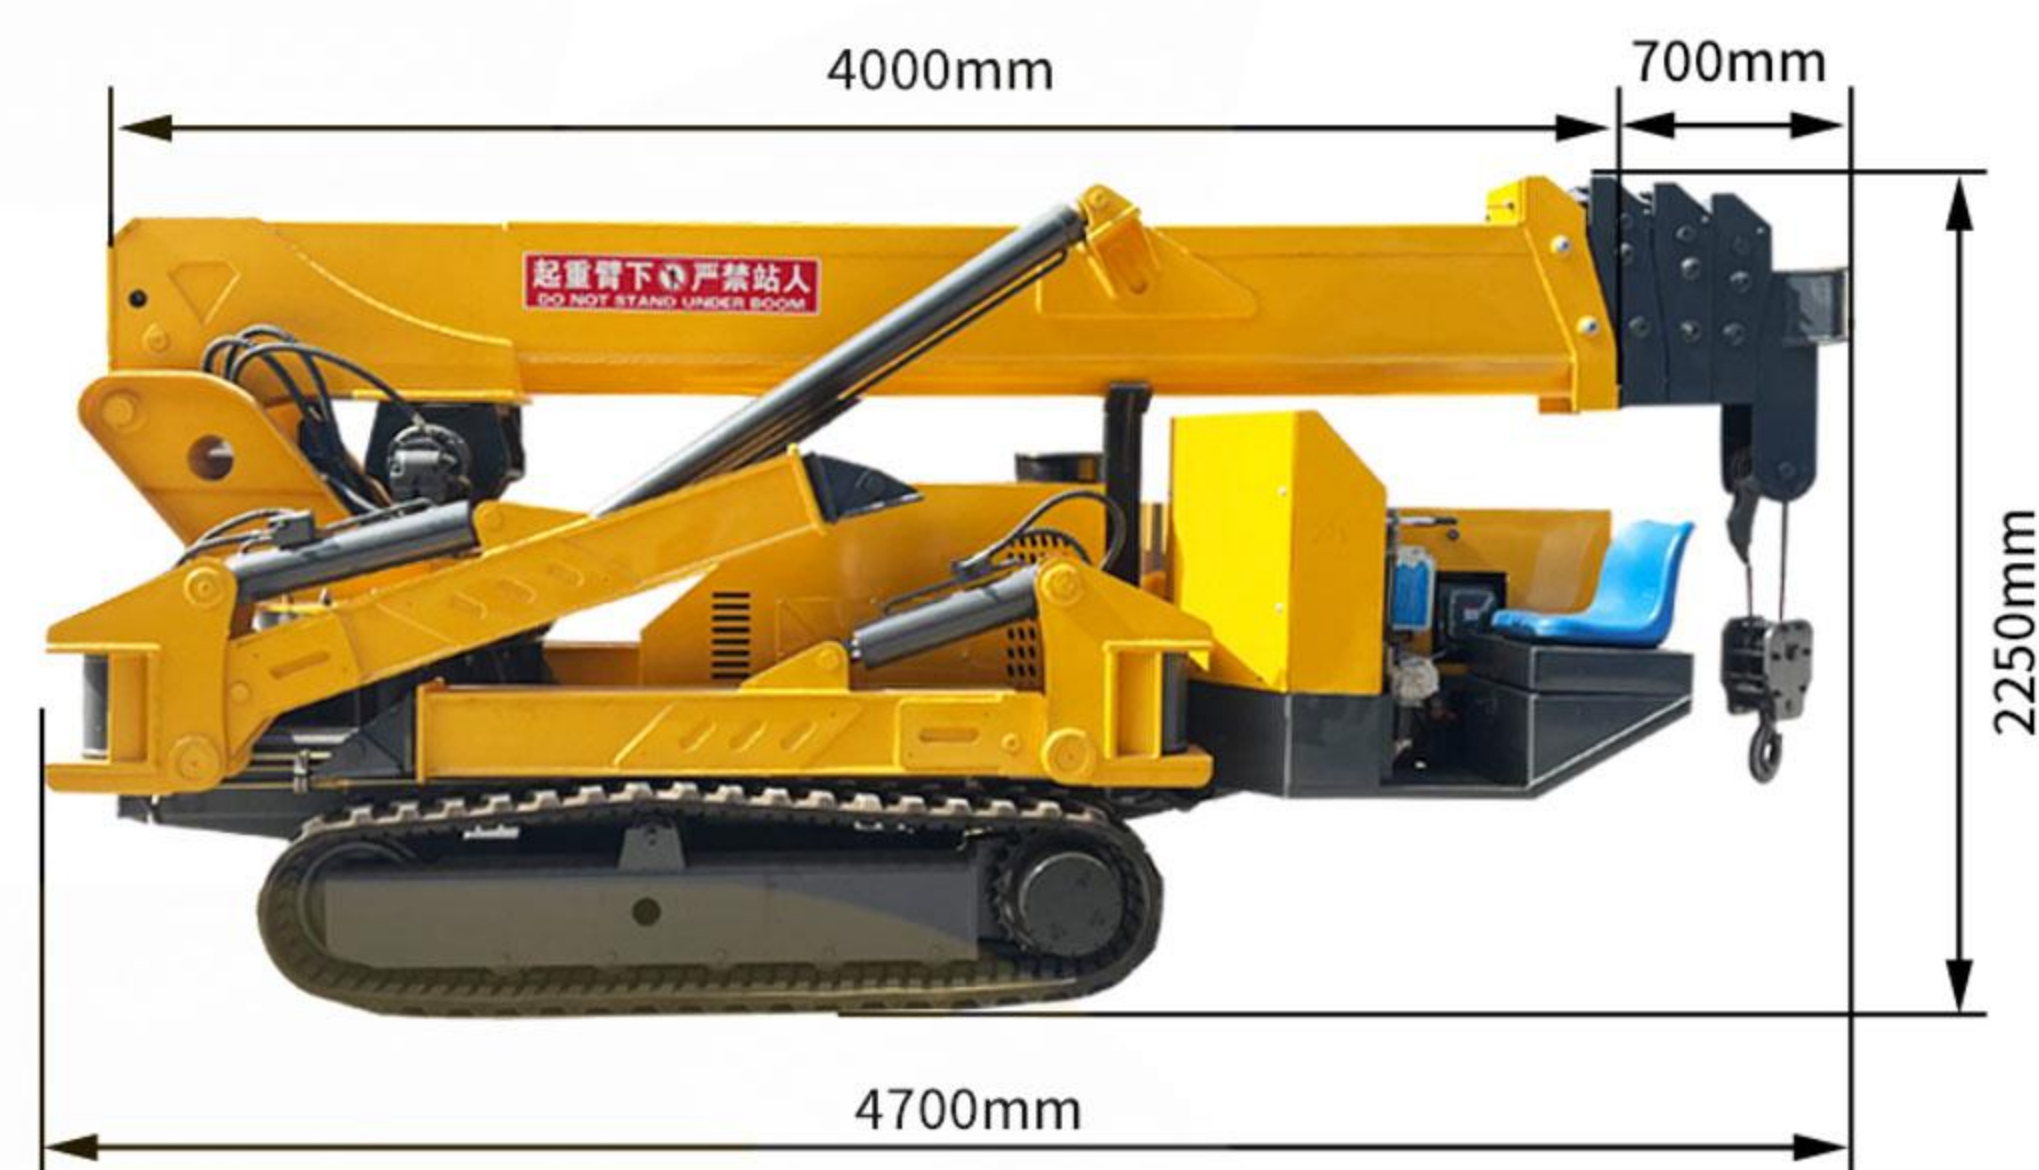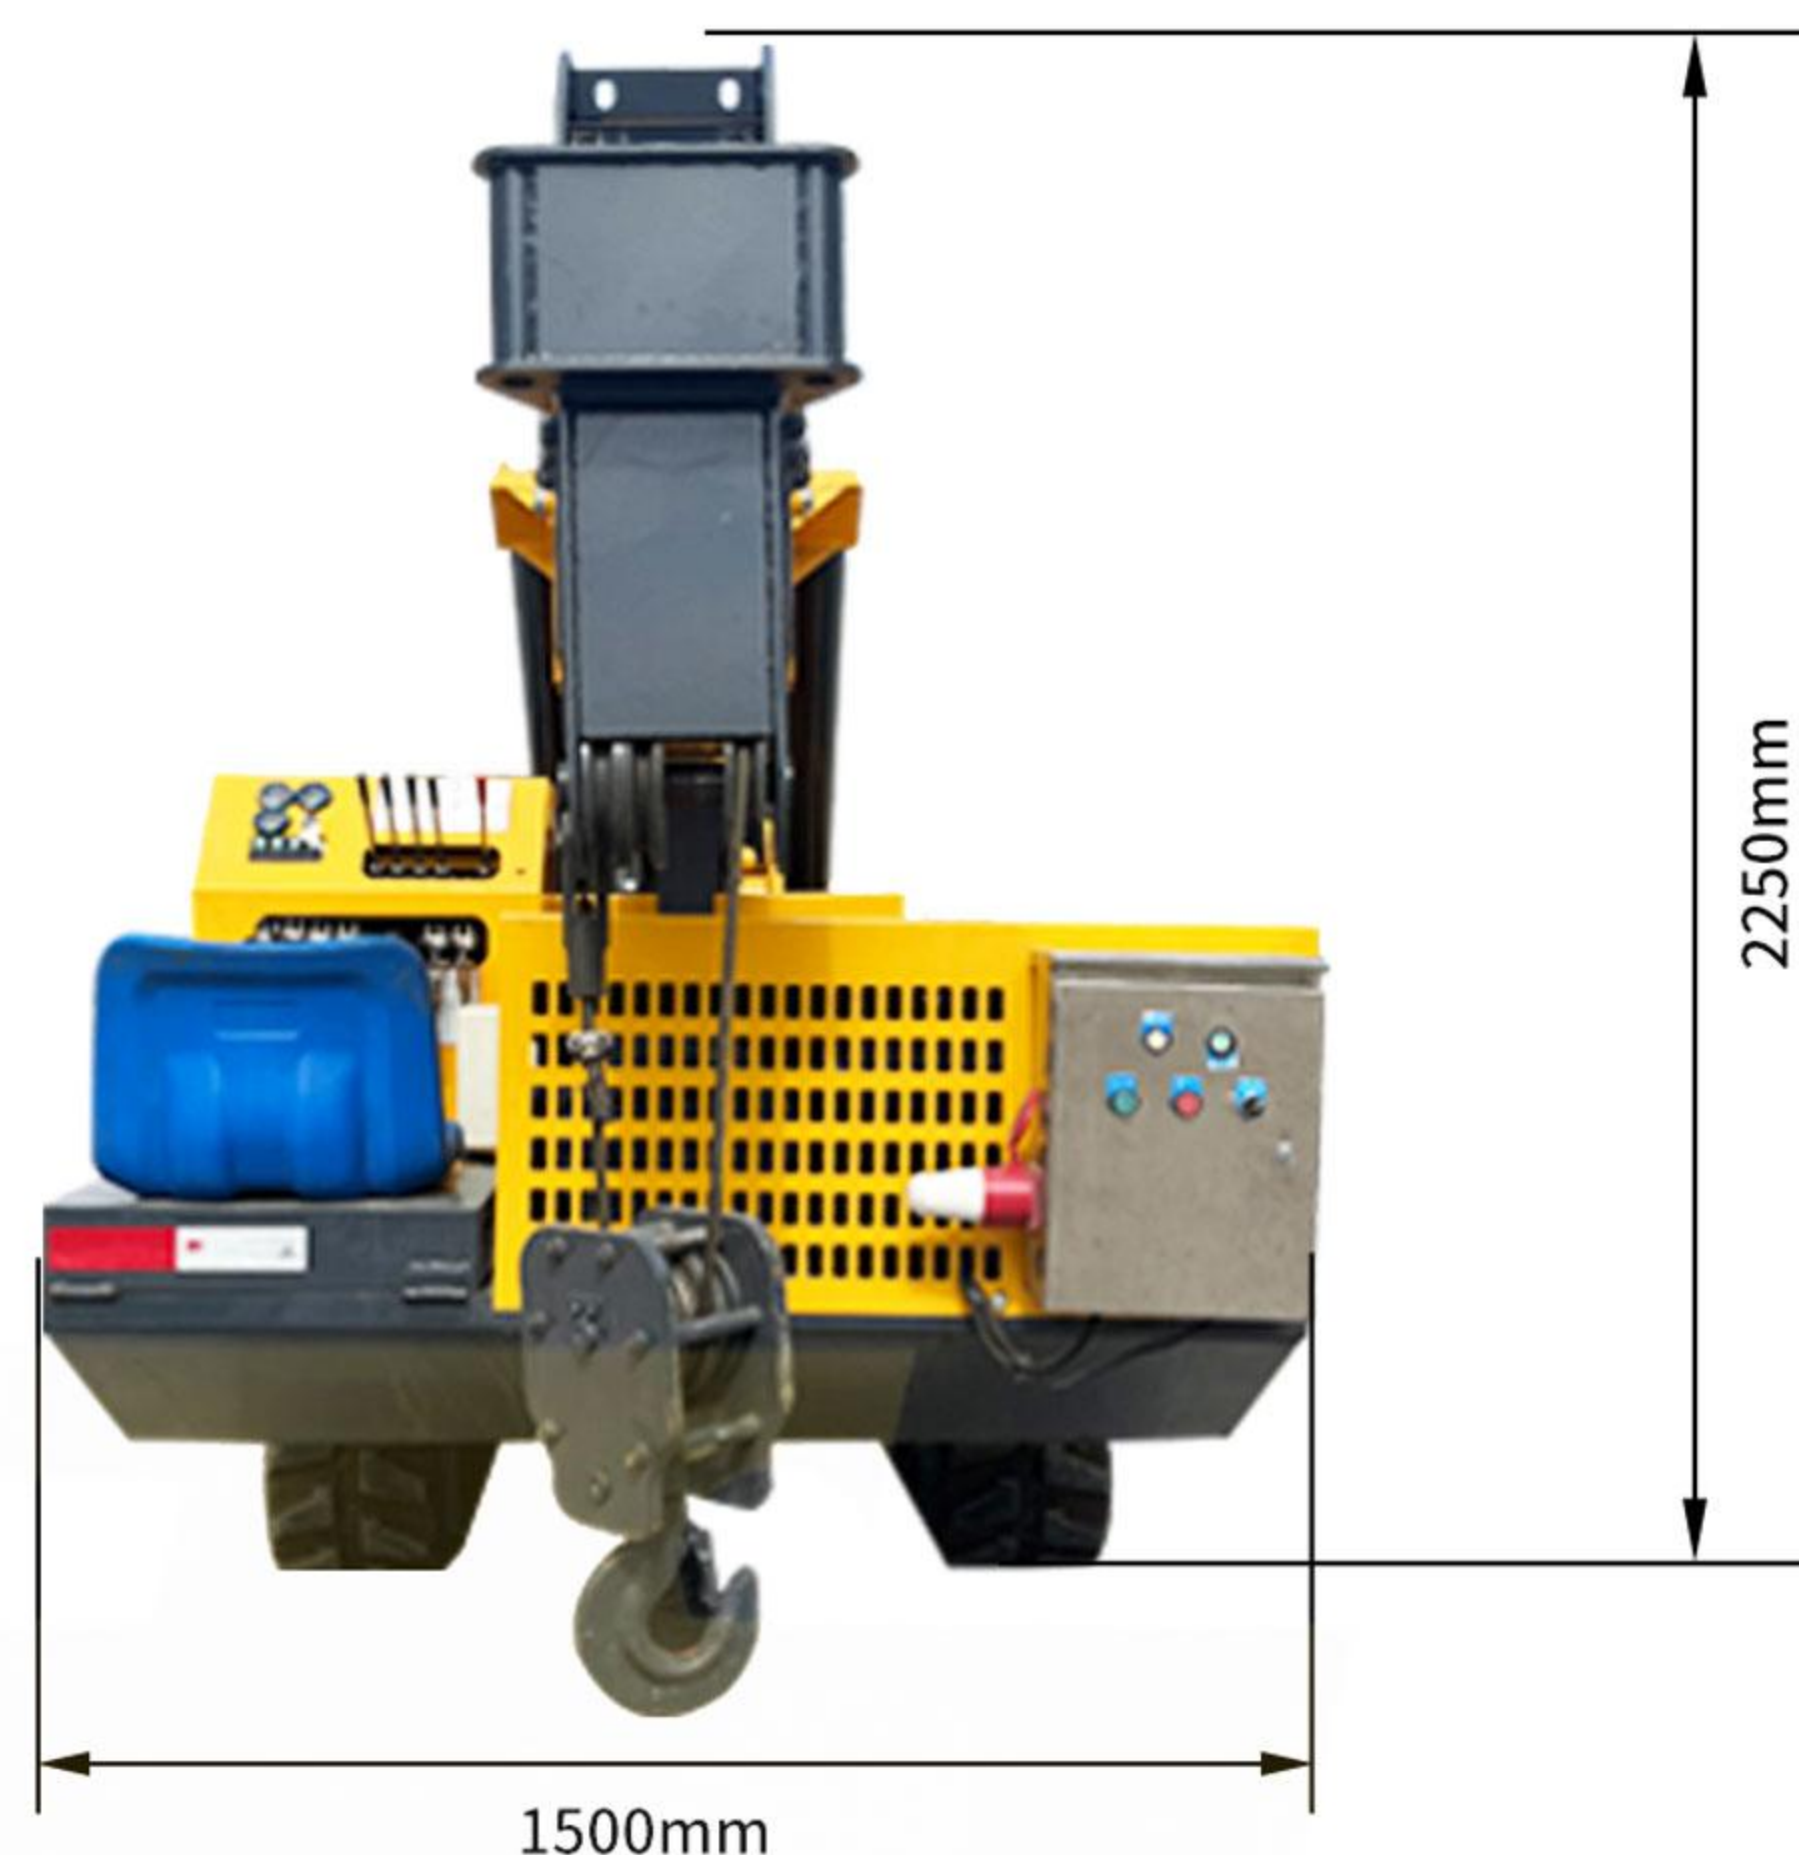

5吨蜘蛛吊机参数 5-ton Crawler Spider Crane

5T蜘蛛吊机 5T Spider Crane			
● 自重 (T) dead-weight (T)		6.7T	
● 最大作业半径 Maximum operating radius		15m	
● 卷扬装置 Winch device	● 吊钩上升速度 Hook lifting speed	12m/min (4绳)双速 12m/min (4-rope) two-speed	
	● 钢丝绳规格 Specification of steel wire rope	Φ 11mm*60m	
● 伸缩装置 Telescopic device	● 吊臂形式 Boom form	4m×5段吊臂 (可定制) 4m×5-section lifting arm (Support customization)	
	● 吊臂长/时间 Boom length/time	4.5m-17m/54sec (可调节) 4.5m-17m/54sec (adjustable)	
● 变幅装置 Luffing device	● 吊臂角度/时间 Boom angle/time	0-78°/13sec	
● 回旋装置 gyroscope	● 回转角度/速度 Rotation angle/speed	0-360°(连续) /38sec 0-360° (continuous)/38sec	
● 支腿 Outrigger	● 支腿动作形式 Outrigger movement form	手动旋出+油缸支撑(两节腿) Manual screw-out + cylinder support (two-section leg)	
	● 最大伸出幅度 (mm) Maximum extension amplitude (mm)	5800 (长) X4900 (后) X5600 (前) 5800 (length) X4900 (rear) X5600 (front)	
● 行走装置 running gear	● 行走方式 Walking mode	液压驱动(高低速) Hydraulic drive (high and low speed)	
	● 行走速度 Walking speed	0-2.5km/h	
	● 爬坡能力 Gradeability	25°(36%)	
● 可选装 Optional		可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black	
● 规格 Specifications		5T	
● 最大地上扬程 Maximum ground lift		17m	
● 发动机 engine	● 生产方 Manufacturer	玉柴 (可定制) 58kw yuchai (Support customization) 58kw	
	● 型号 model number	490CC	
	● 启动方式 start mode	电启动 Electric start	
	● 启动性能 start performance	-50℃-45℃	
	● 燃料/容积 Fuel/Volume	柴油/35L Diesel oil/35L	
● 操作系统 operating system	● 电池容量 Battery capacity	24v 45AH	
	● 操作种类(吊臂/支腿)手动行走 Operation type (boom/leg), manual walking	手动操作、手动行走 (可选遥控) Manual operation, manual walking(Optional remote control)	
	● 操作特性 Operational Characteristics	手动操作 (可选遥控) Manual operation(Optional remote control)	
● 排放标准 Emission standard		国二 National Phase II	
● 整车尺寸 Vehicle Size		长4.7米, 宽1.5米, 高2.25米 4.7meters length, 1.5 meters width, and 2.25 meters height	
● 履带(mm) Track (mm)		300(宽)52.5(节距)90(节) 300 (width) 52.5 (pitch) 90 (section)	

5T蜘蛛吊润滑部位图

5T spider crane lubrication parts diagram

卷扬机
a capstan

转盘
rotary (traffic)

注:转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”

Note: Turntables and jibs must be maintained regularly (20 days as a cycle)/"Whenever the jibs are out, grease the jibs."

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.

本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)




无线遥控器
wireless remote






8吨蜘蛛吊机 8-ton spider crane

● 性能特点 Performance Characteristics

- 橡胶履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 机身紧凑,占用空间小。适用范围广泛
- 安全设计 可防止错误操作
- 可加遥控装置 操作便捷
- Rubber tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- The body of the machine is compact and takes up little space. Wide range of application
- Safe design prevents incorrect operation
- Remote control can be added for easy operation

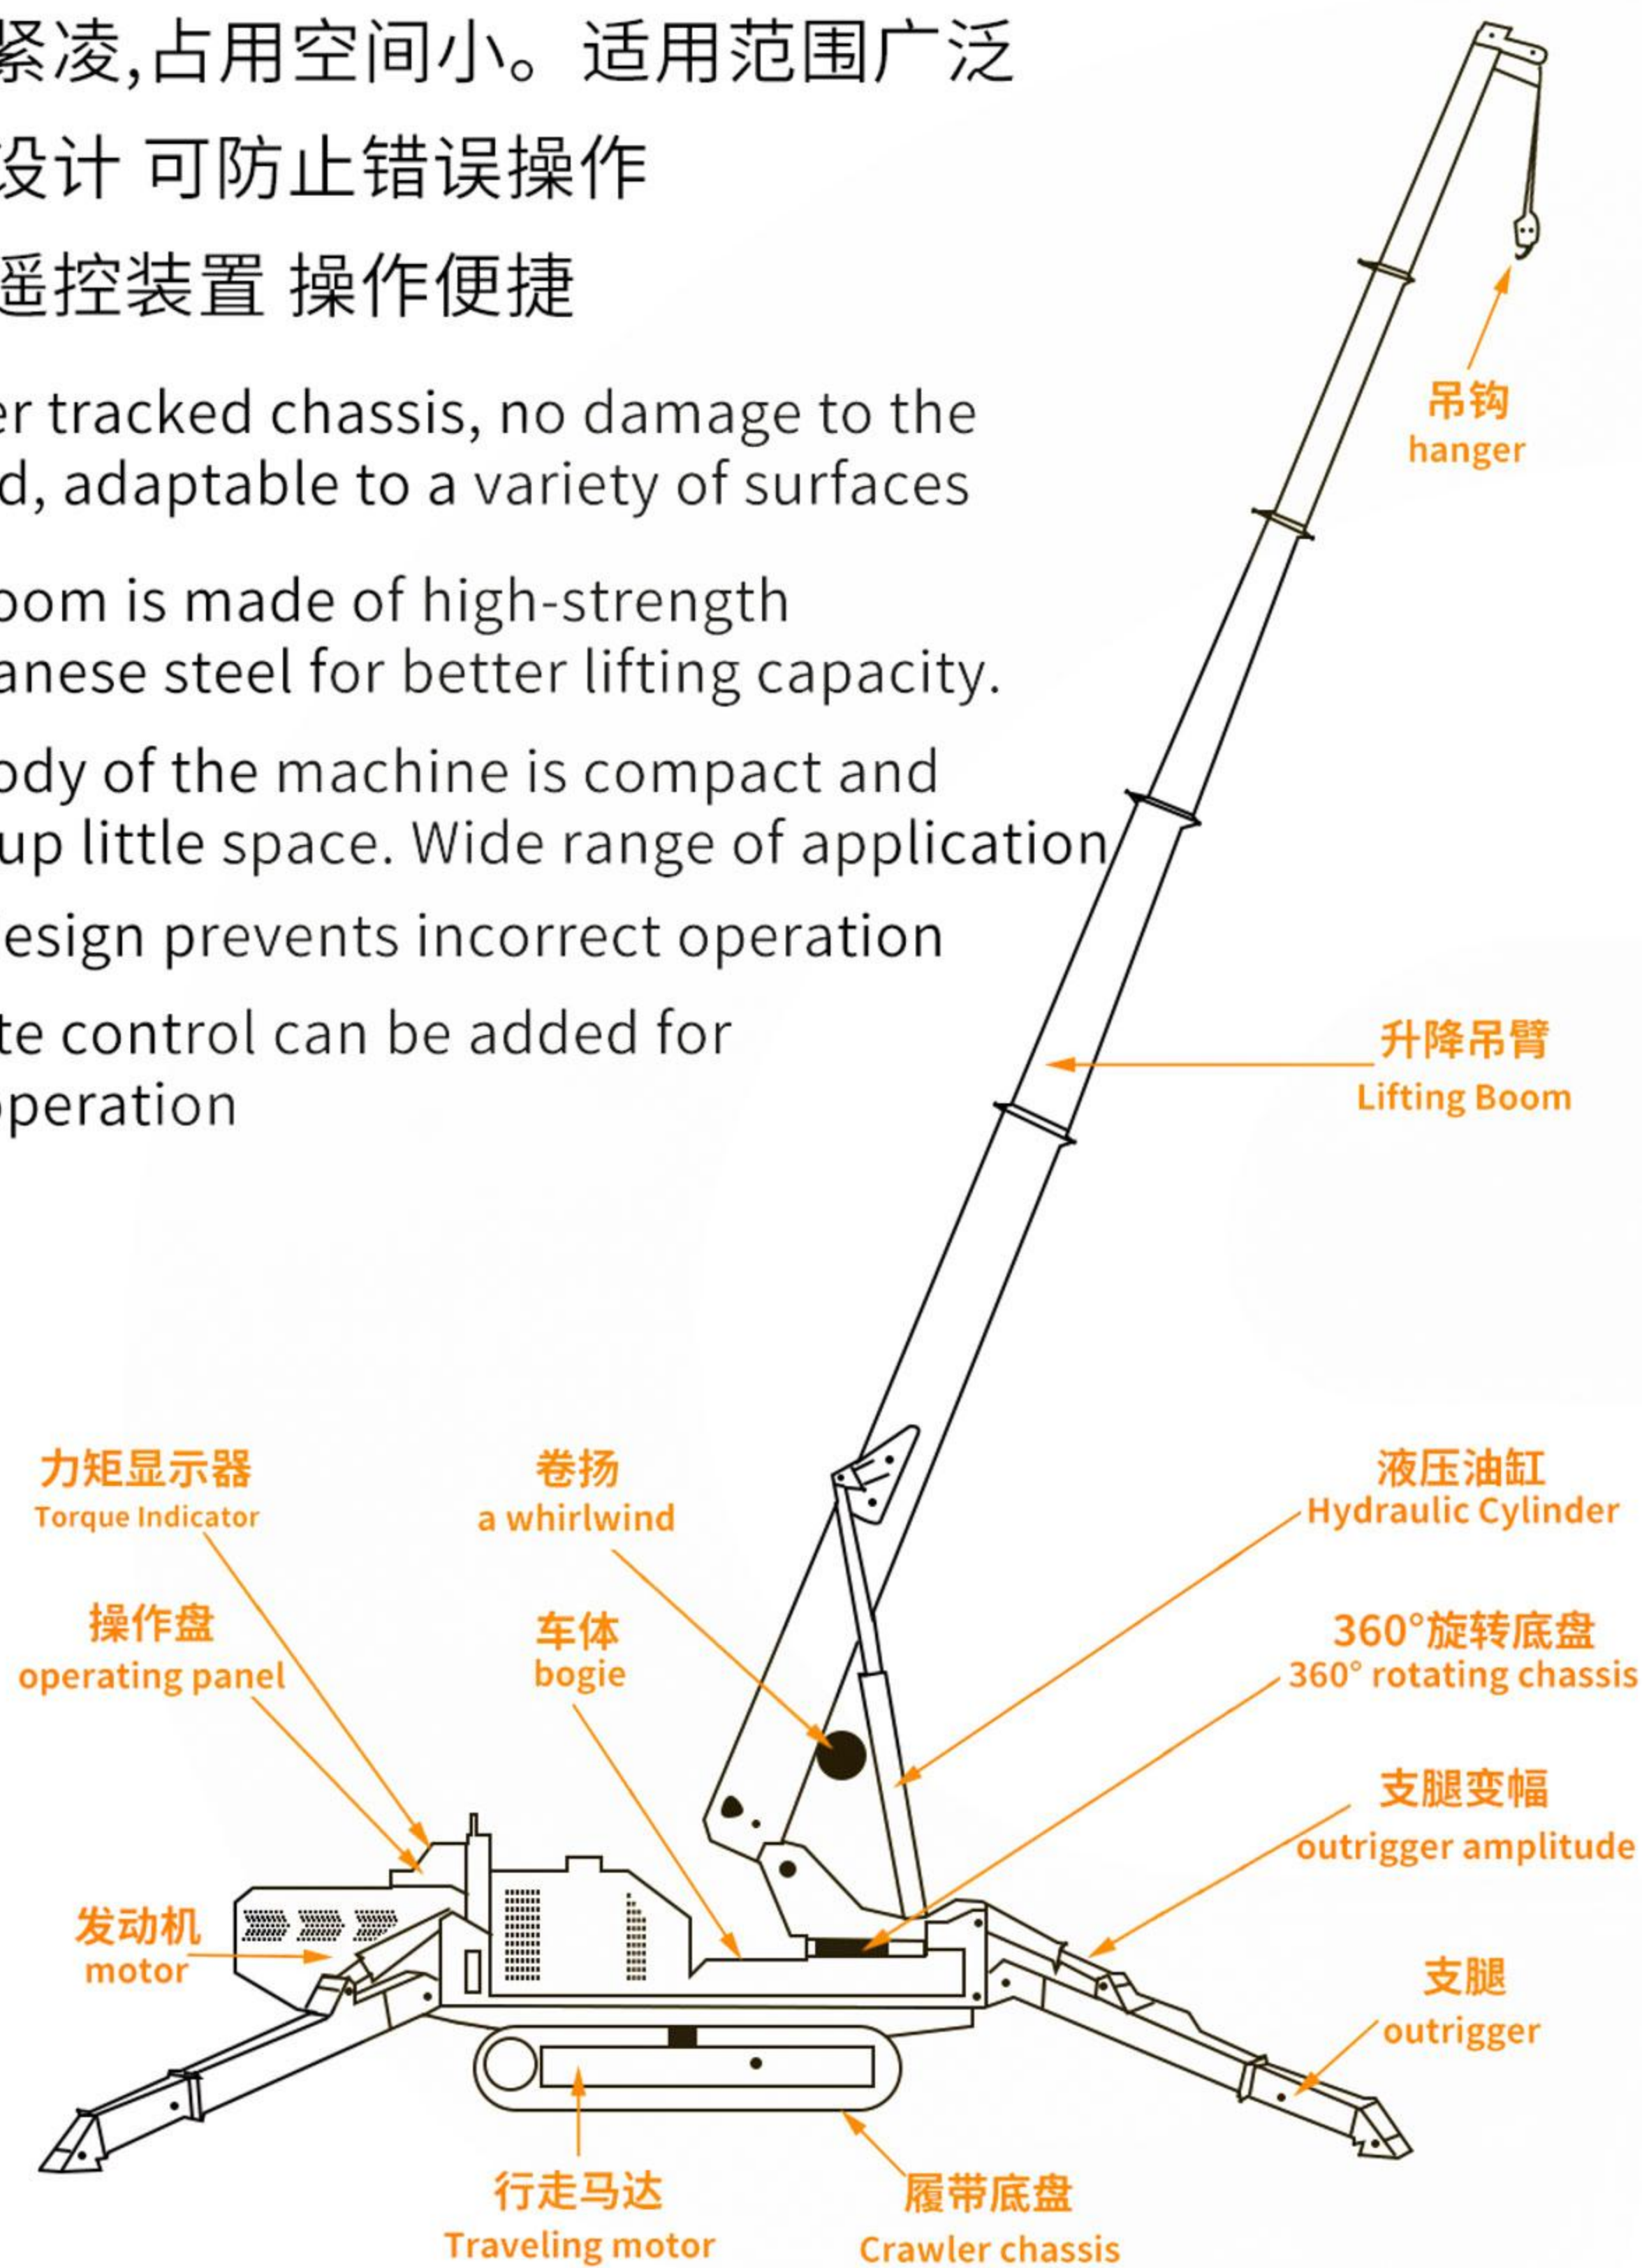

8吨蜘蛛吊机吊重表
8 ton spider crane lifting weight chart

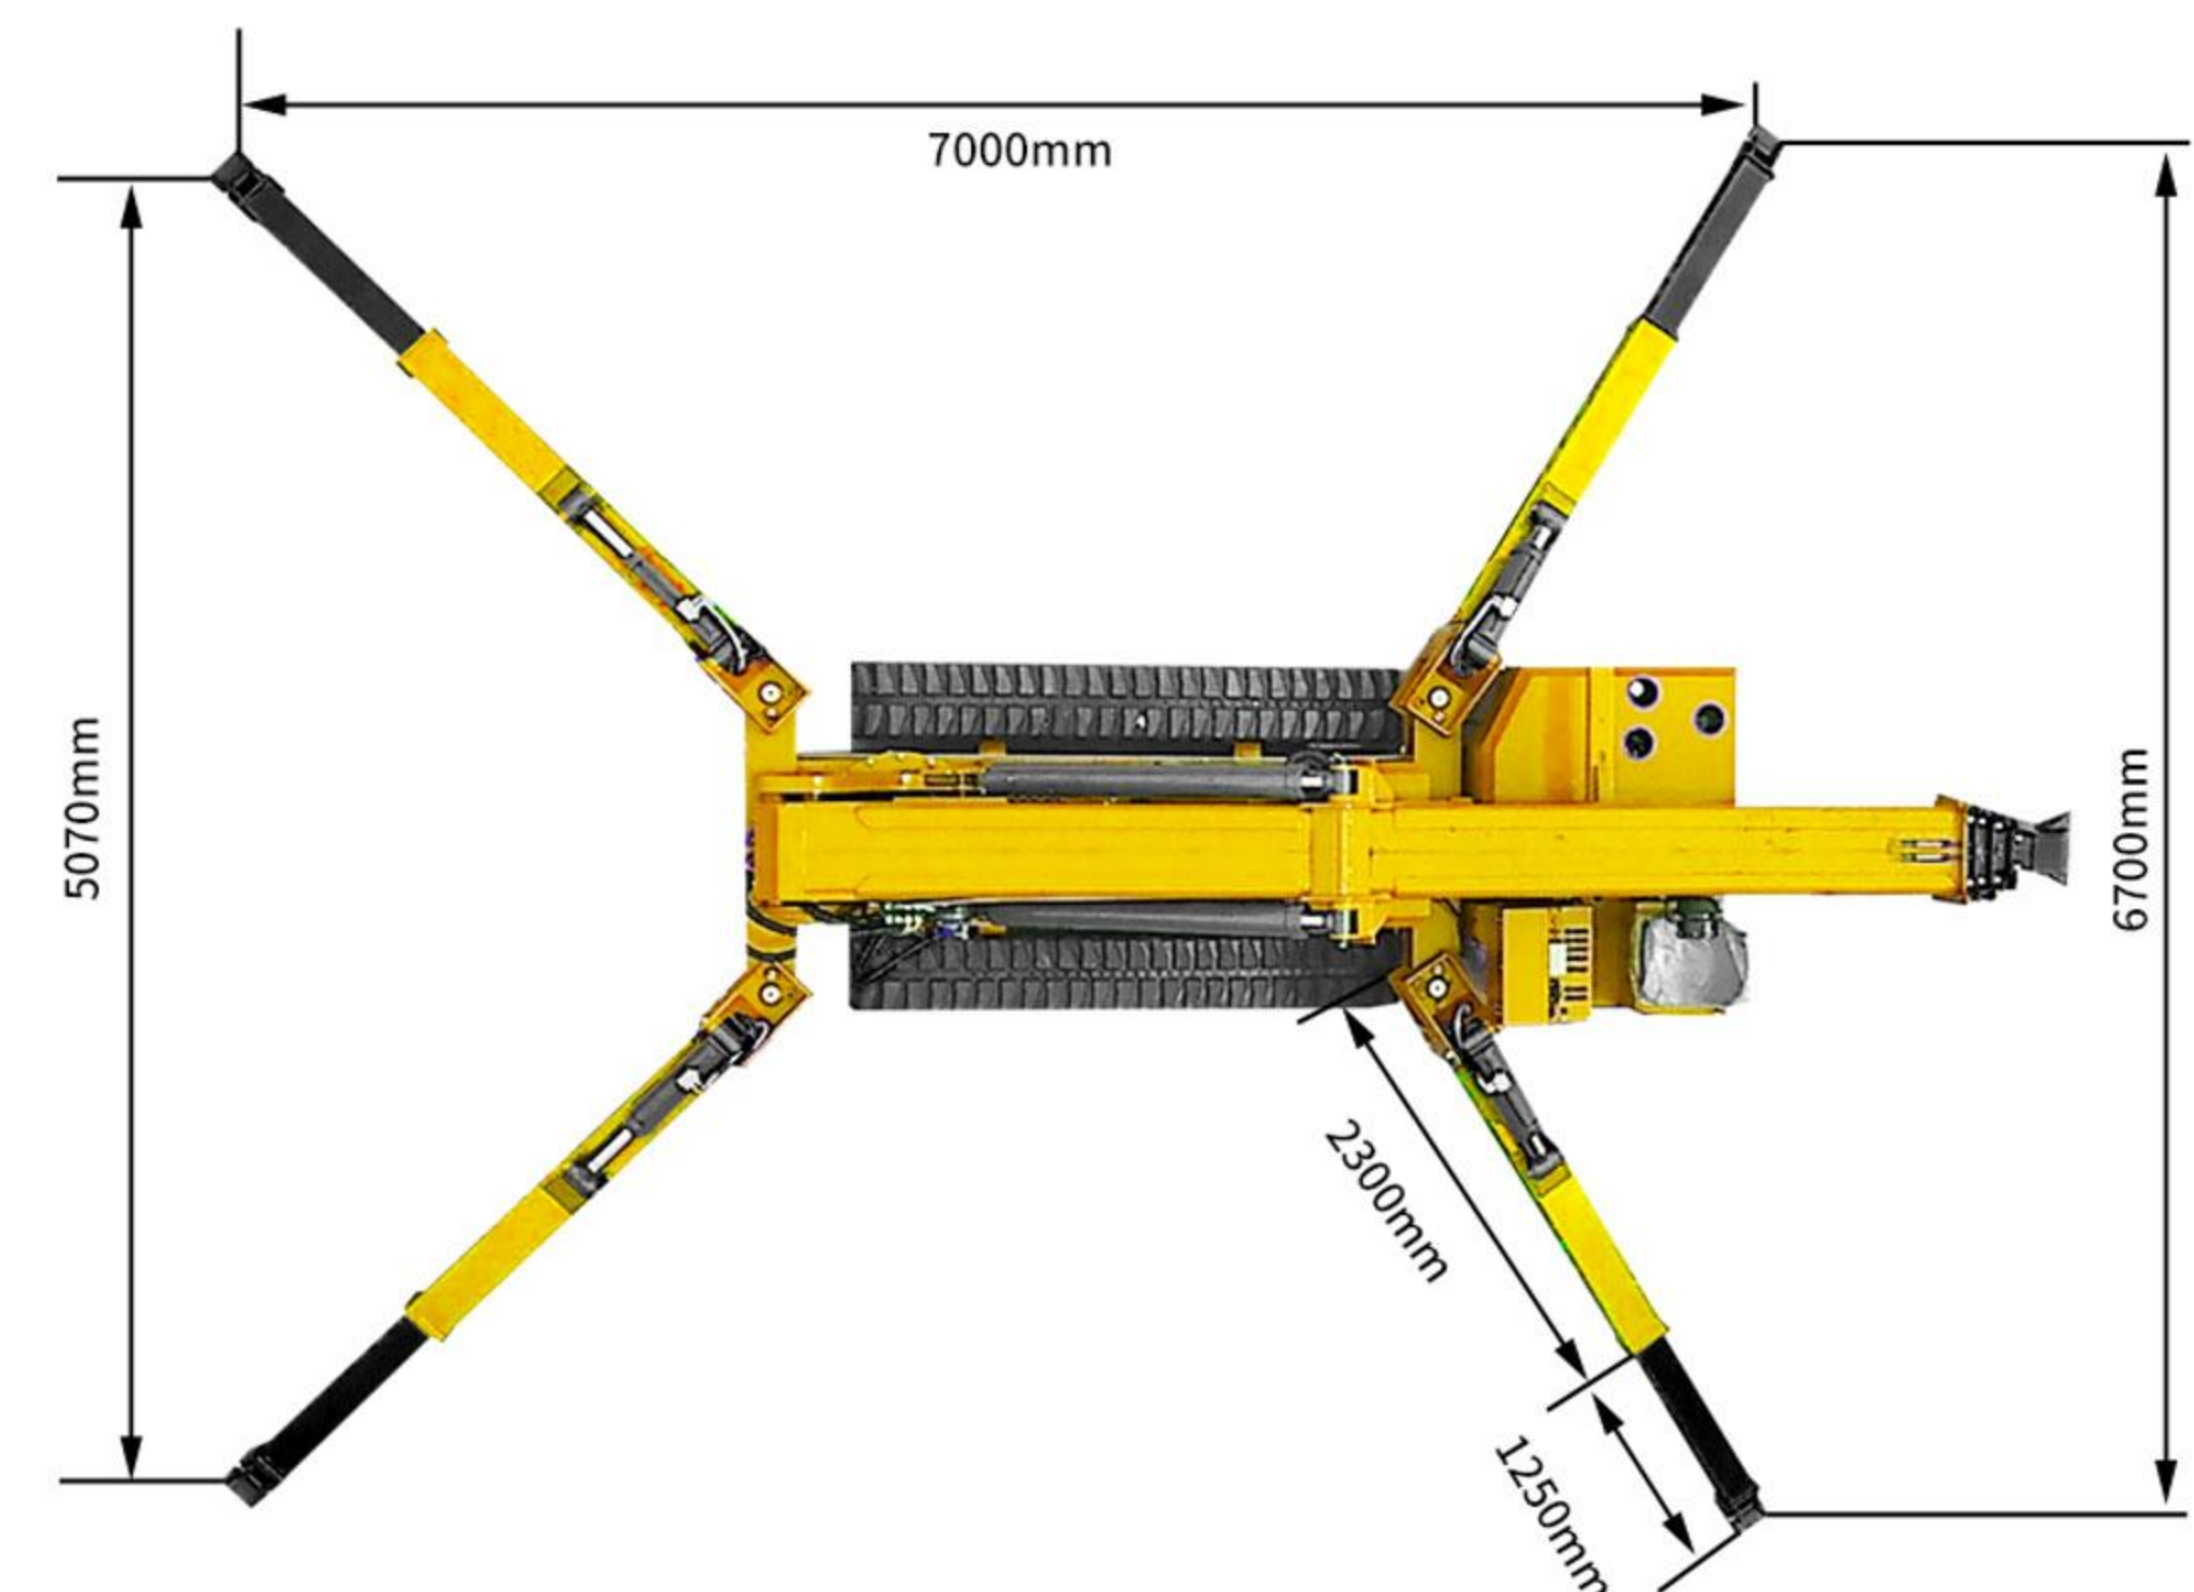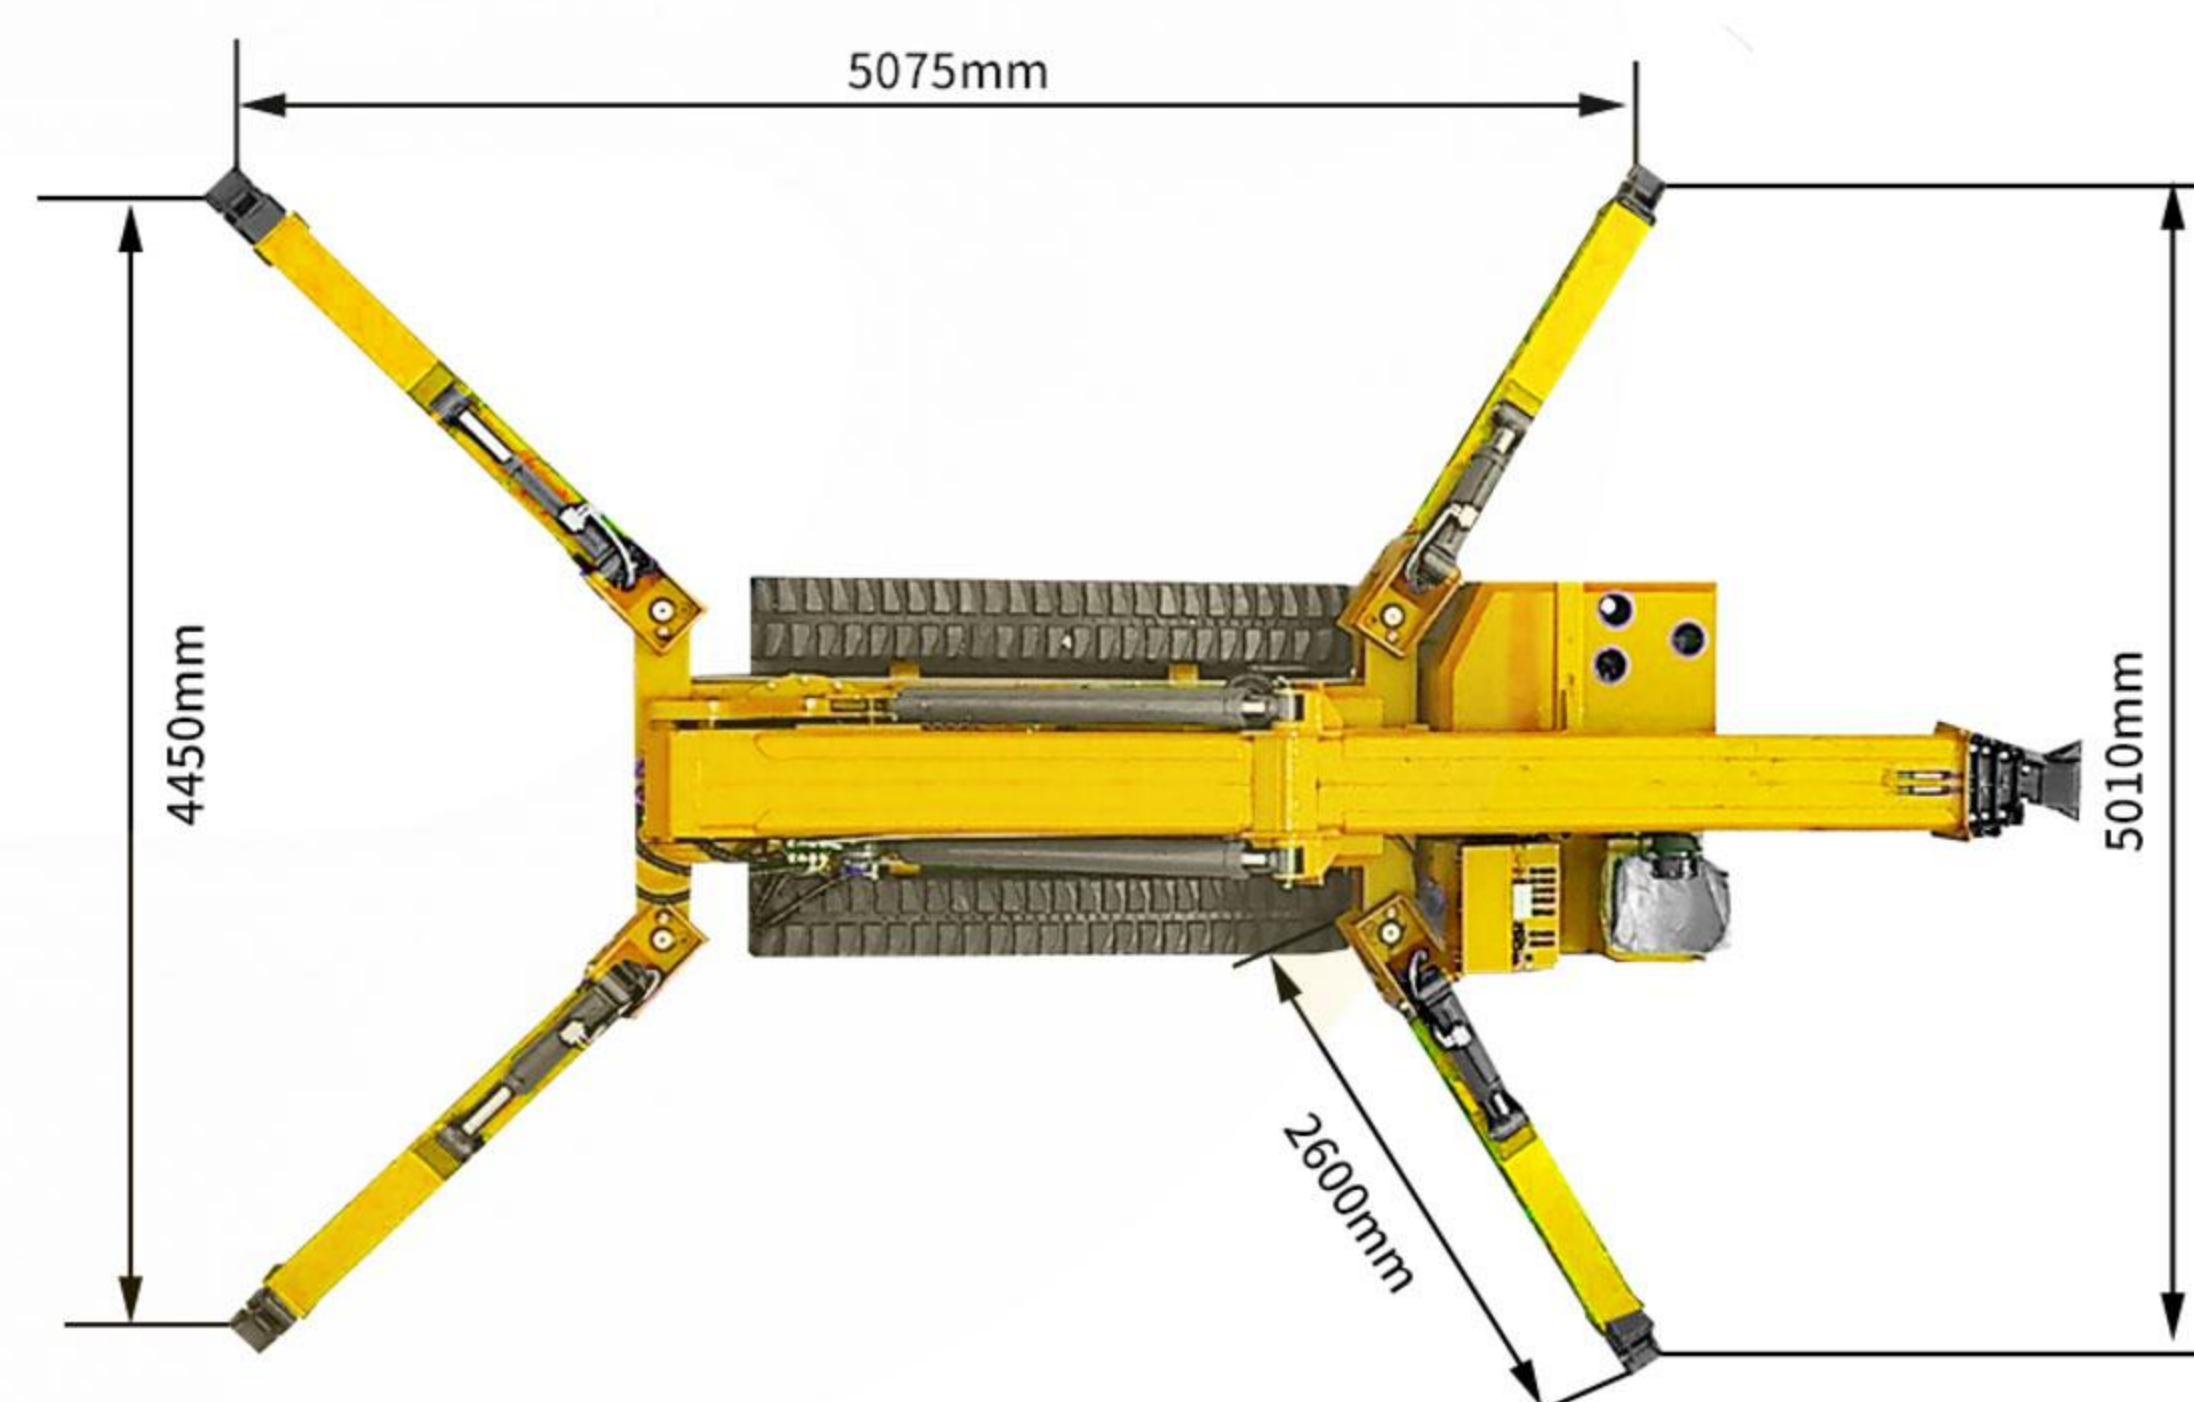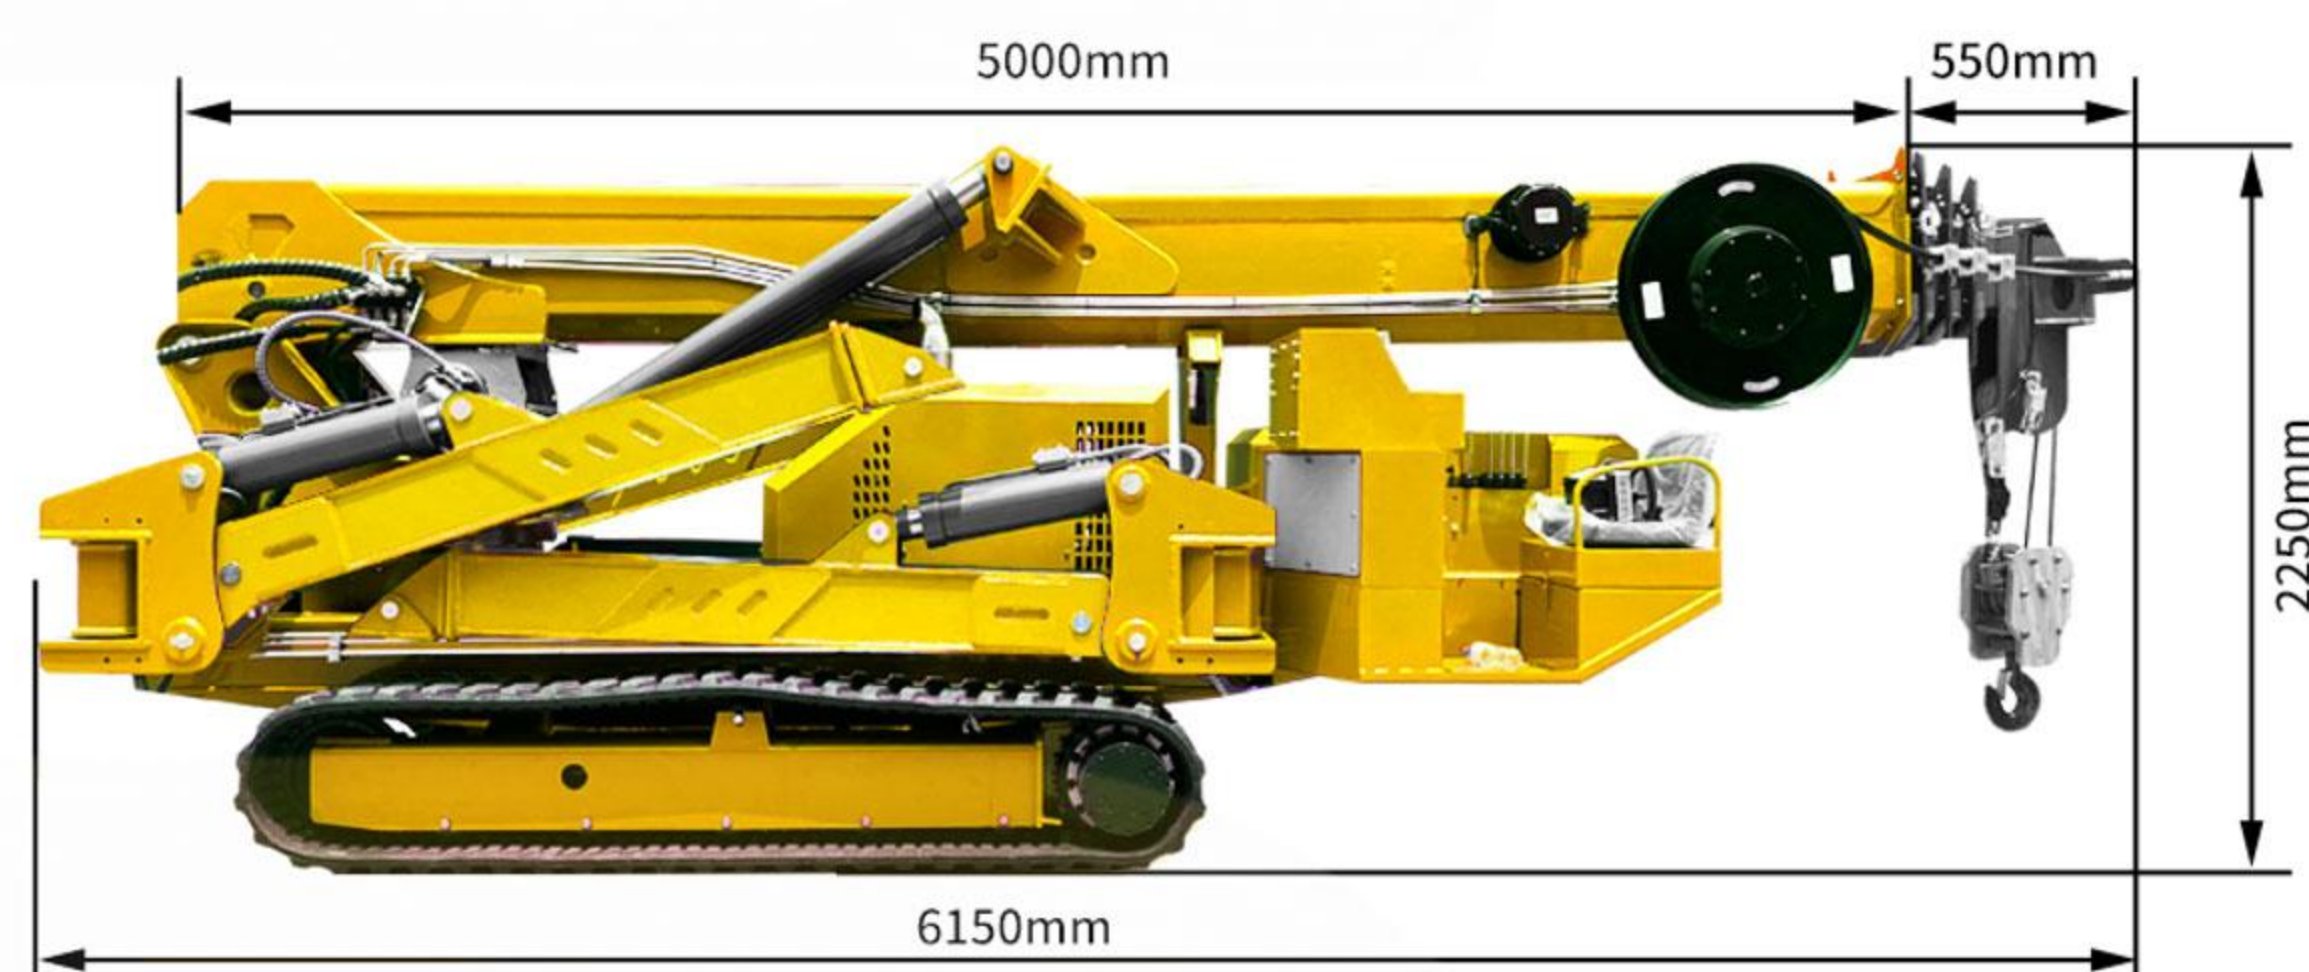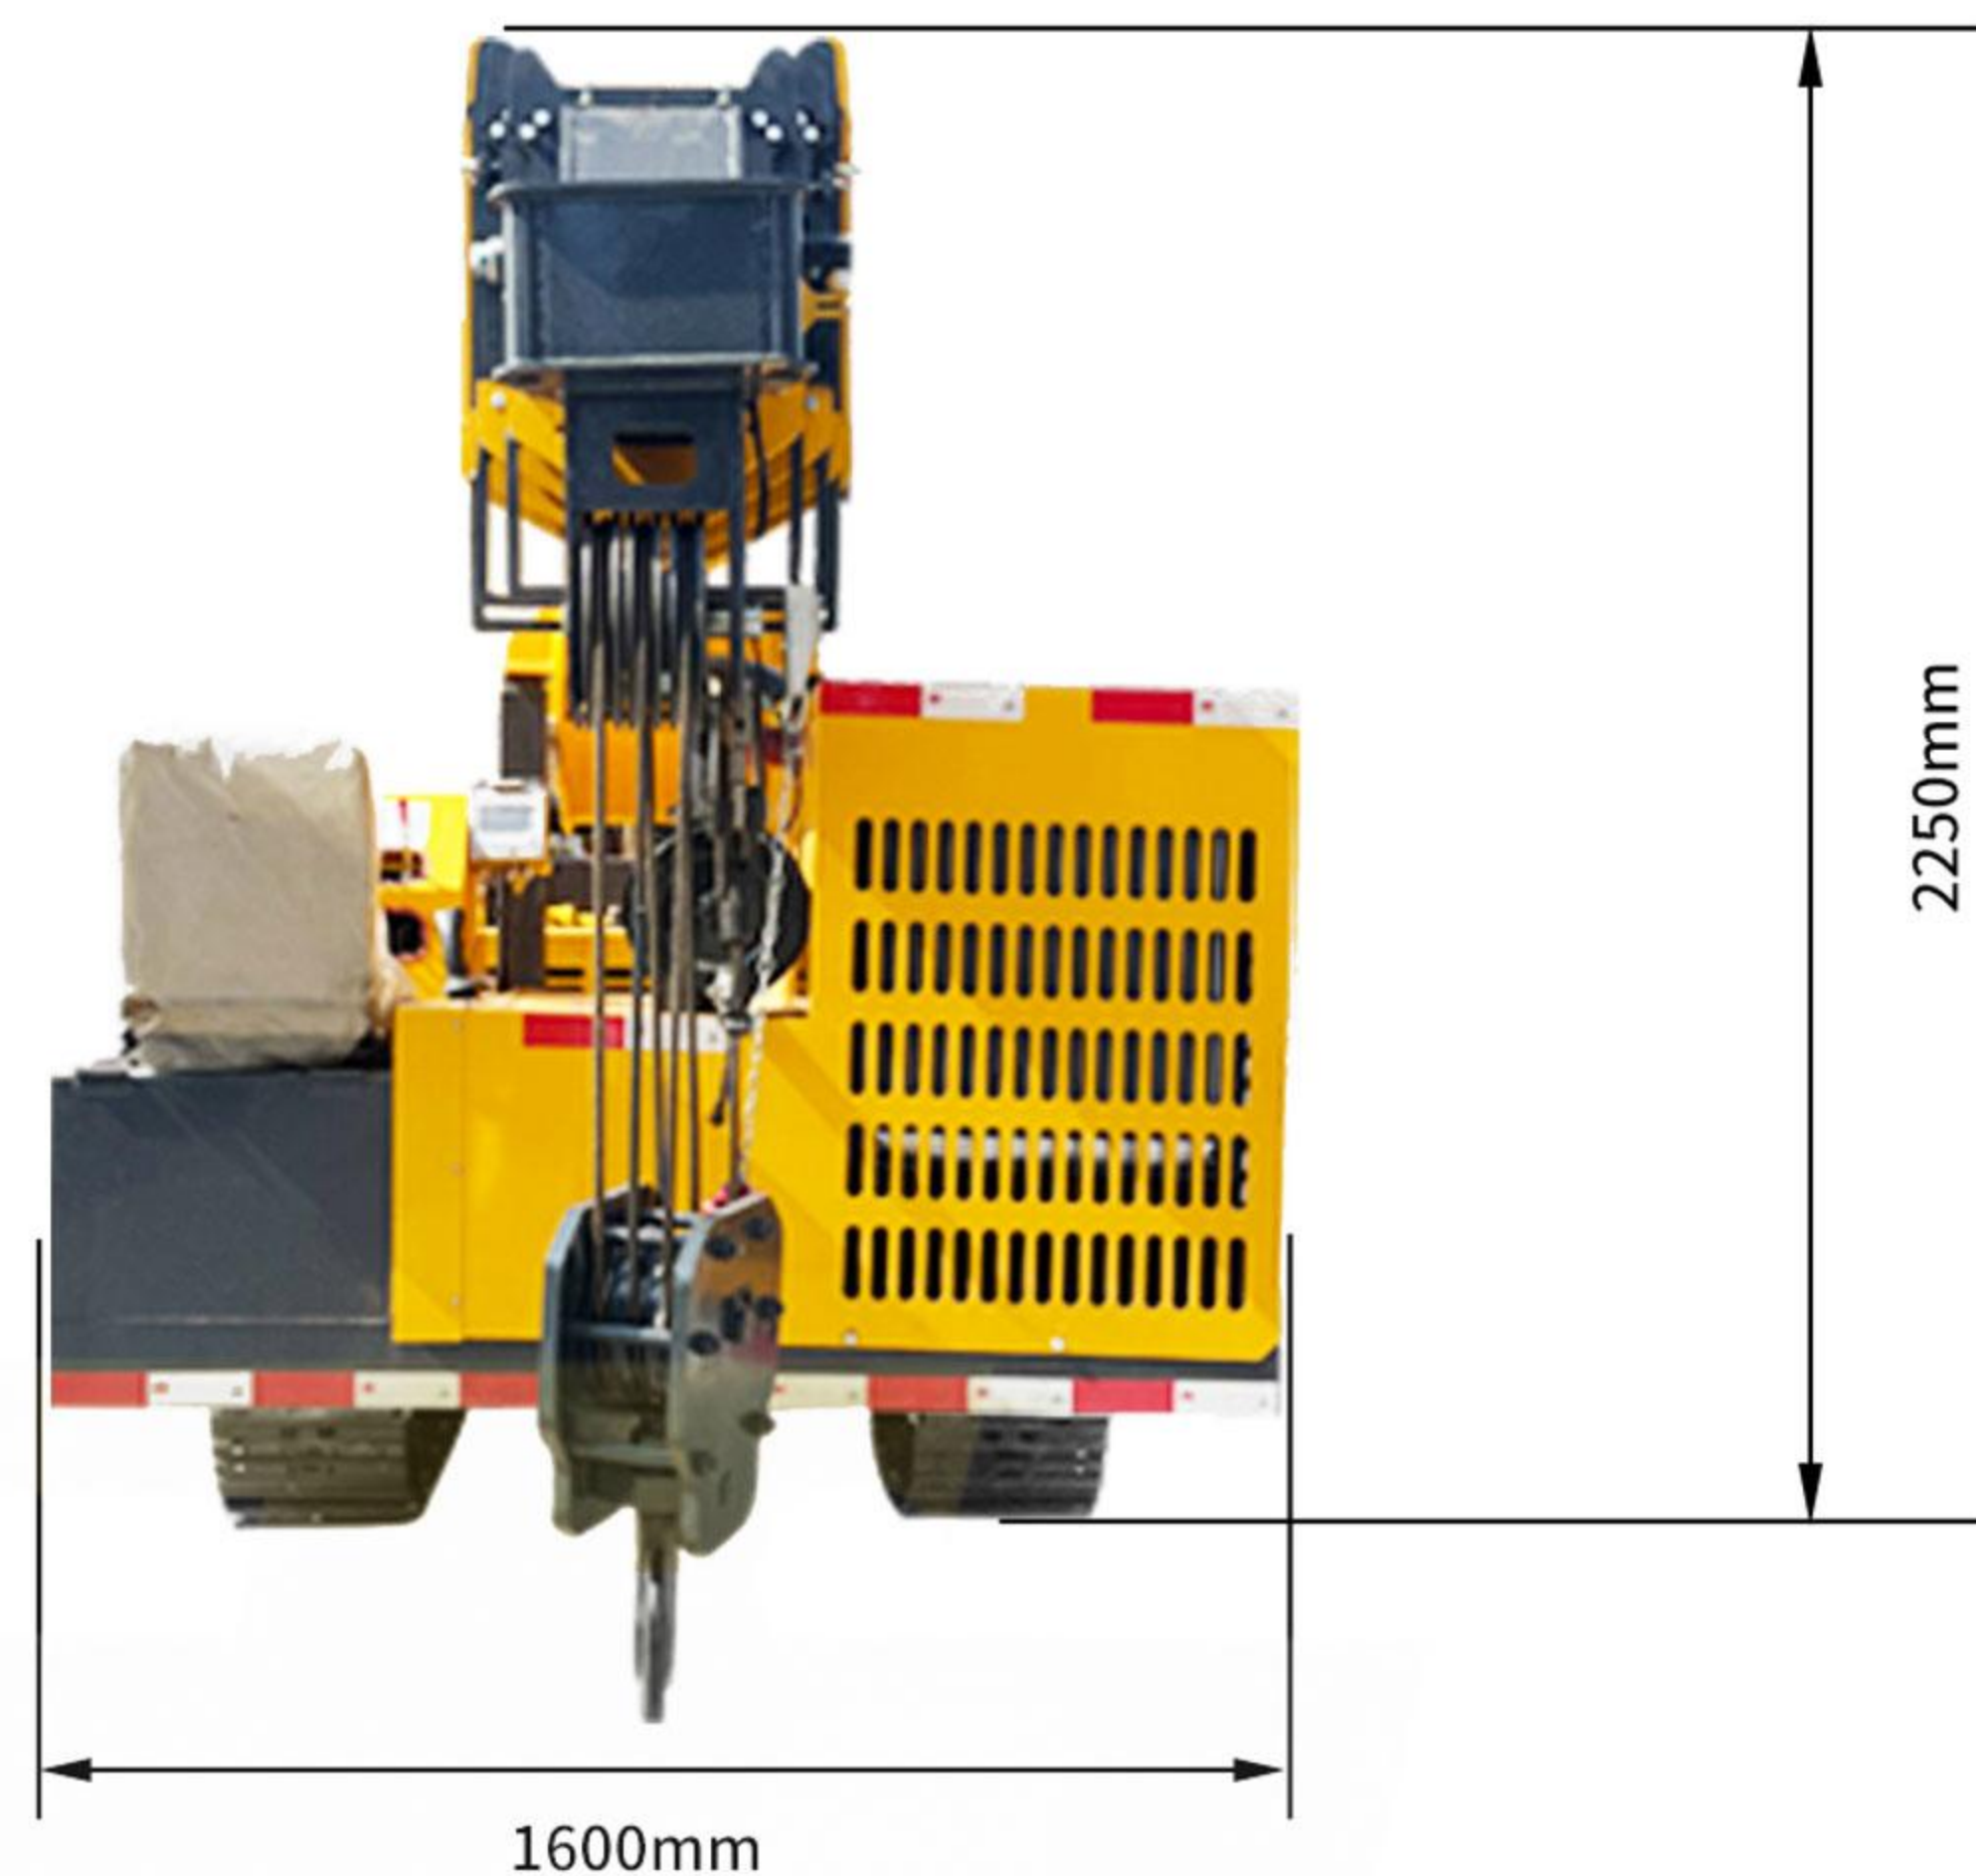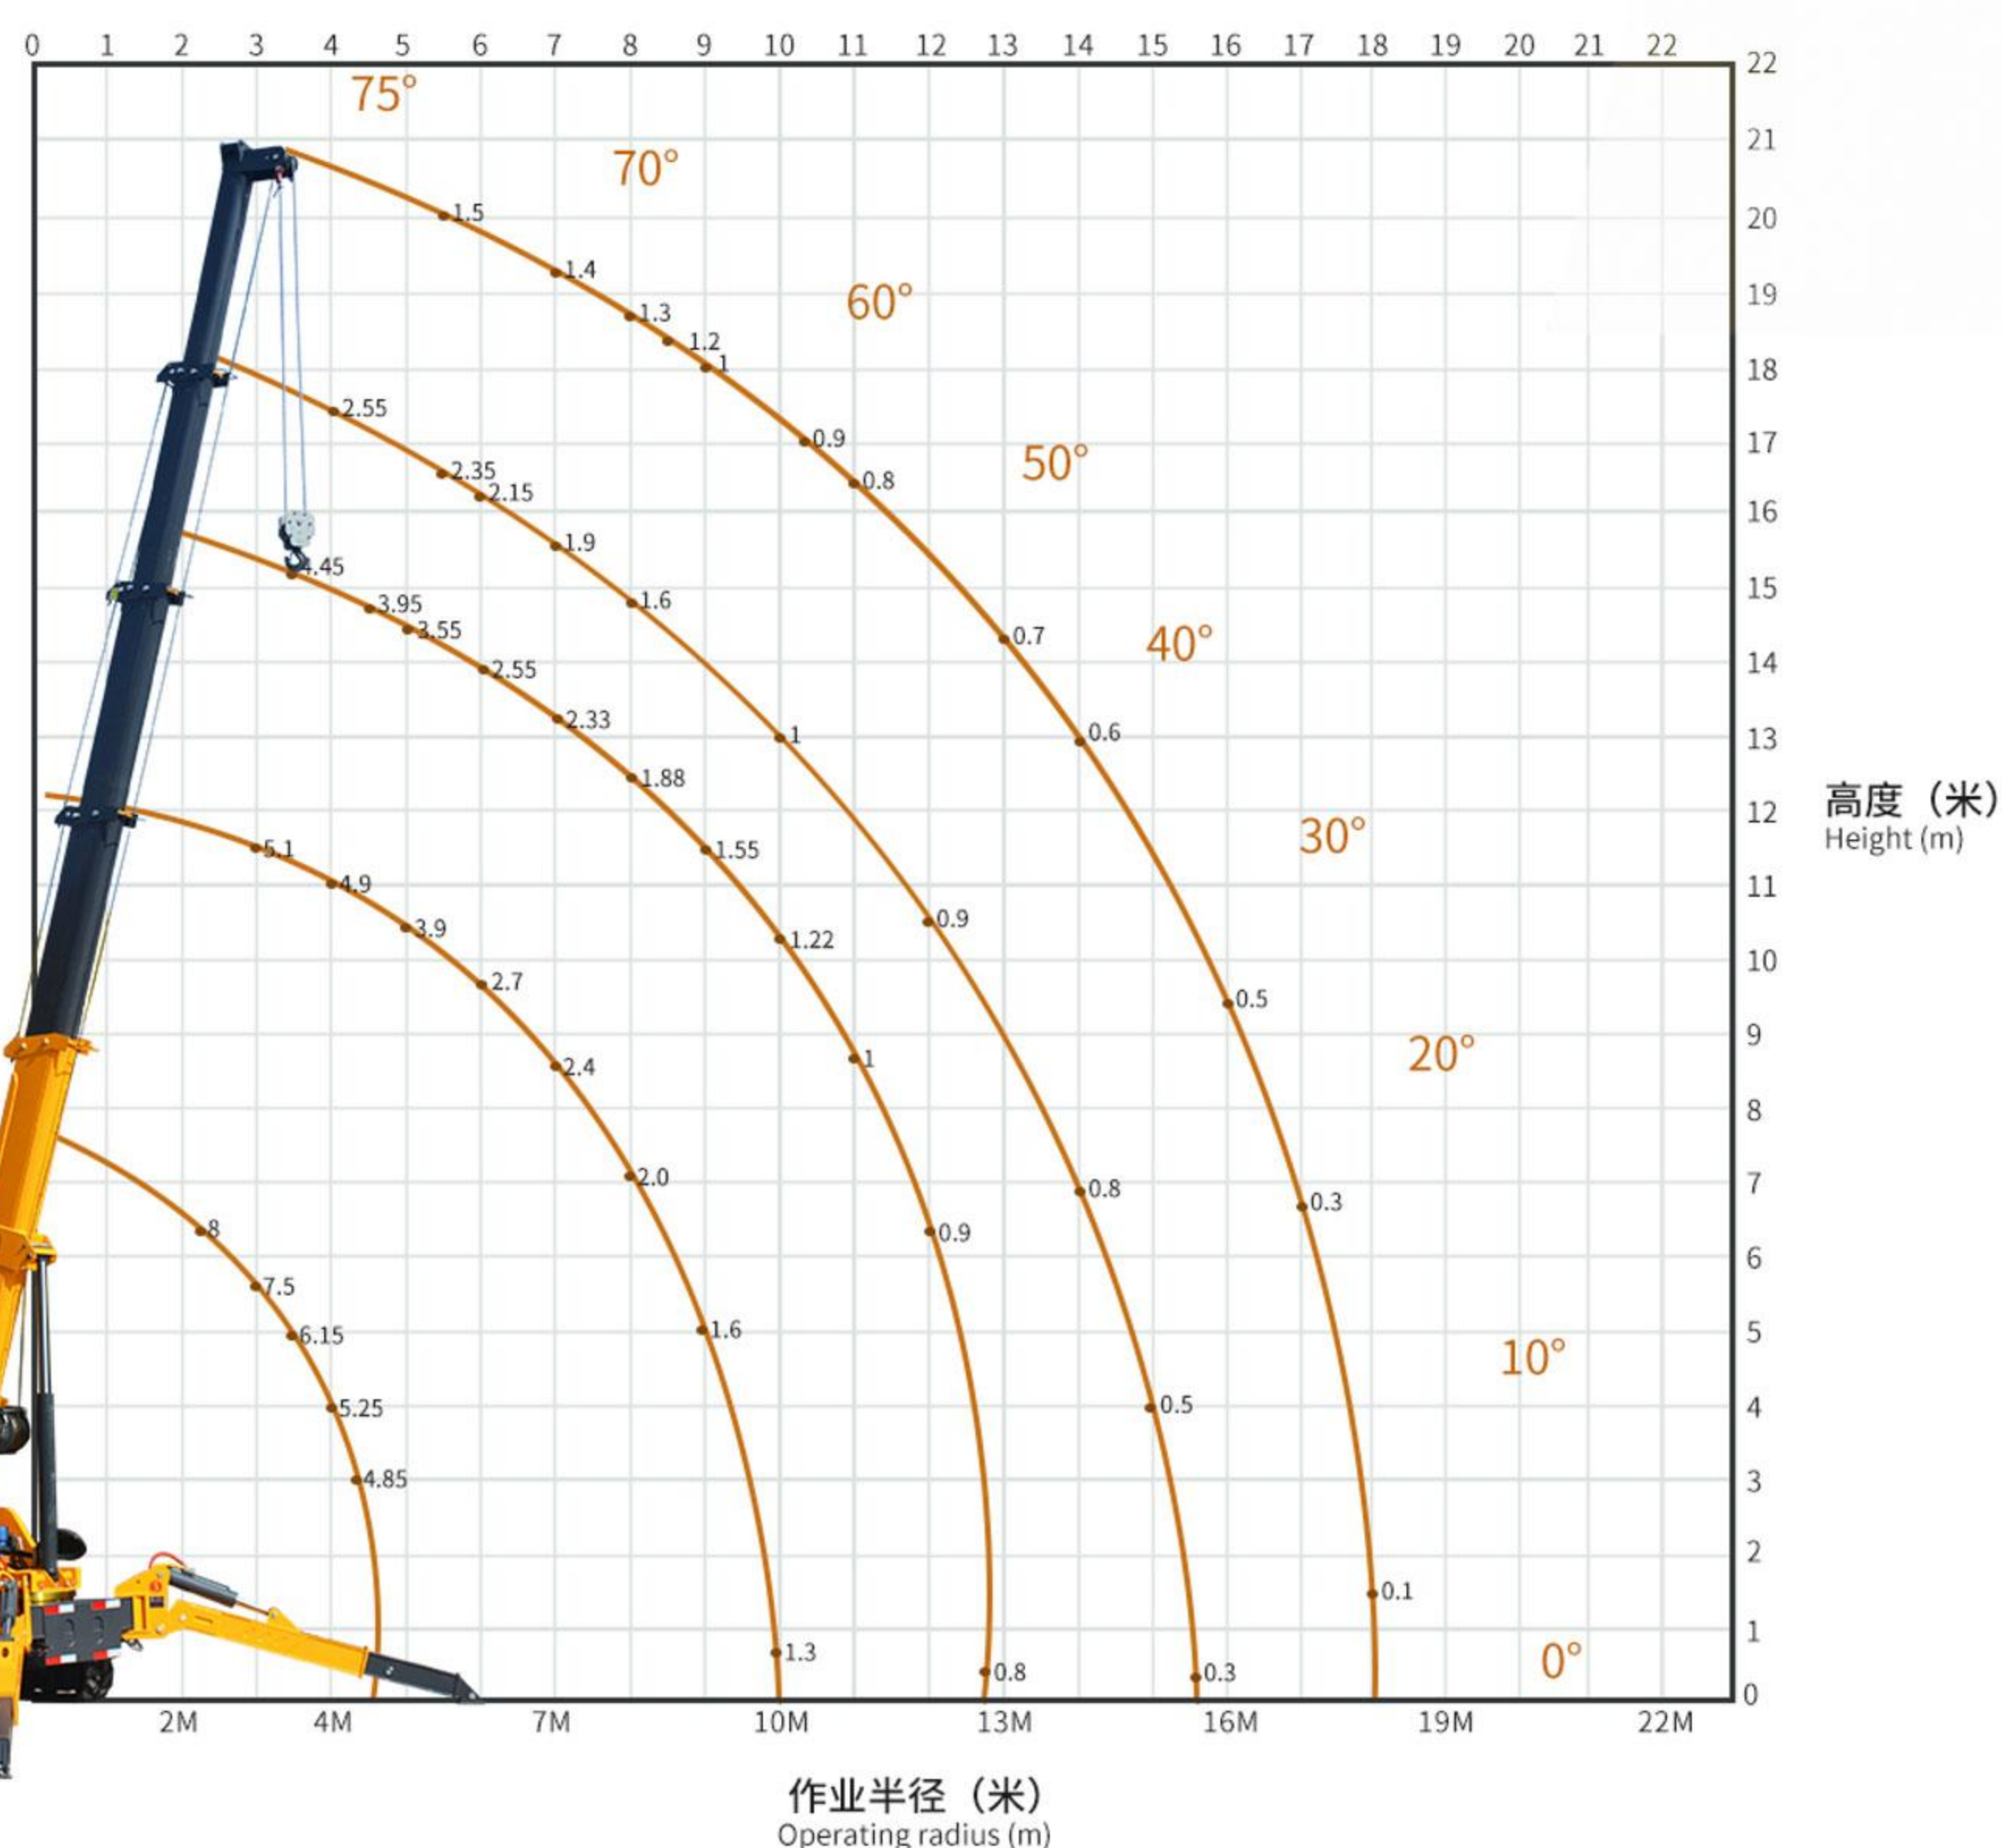

8吨蜘蛛吊机参数

8-ton Crawler Spider Crane

8T蜘蛛吊机 8T Spider Crane					
● 自重 (T) dead-weight (T)			8.7T		
● 最大作业半径 Maximum operating radius			18m		
● 卷扬装置 Winch device		● 吊钩上升速度 Hook lifting speed		12m/min (4绳)双速 12m/min (4-rope) two-speed	
		● 钢丝绳规格 Specification of steel wire rope		Φ 12mm*80m	
● 伸缩装置 Telescopic device		● 吊臂形式 Boom form		5m×5段吊臂 (可定制) 5m×5-section lifting arm (Support customization)	
		● 吊臂长/时间 Boom length/time		5.5m-21m/54sec (可调节) 5.5m-21m/54sec (adjustable)	
● 变幅装置 Luffing device		● 吊臂角度/时间 Boom angle/time		0-78°/13sec	
● 回旋装置 gyroscope		● 回转角度/速度 Rotation angle/speed		0-360°(连续) /38sec 0-360 ° (continuous)/38sec	
● 支腿 Outrigger		● 支腿动作形式 Outrigger movement form		手动旋出+油缸支撑(两节腿) Manual screw-out + cylinder support (two-section leg)	
		● 最大伸出幅度 (mm) Maximum extension amplitude (mm)		7000 (长) X5070 (后) X6700 (前) 7000 (length) X5070 (rear) X6700 (front)	
● 行走装置 running gear		● 行走方式 Walking mode		液压驱动 (高低速) Hydraulic drive (high and low speed)	
		● 行走速度 Walking speed		0-2.5km/h	
		● 爬坡能力 Gradeability		25°(36%)	
● 可选装 Optional					
可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black					
● 规格 Specifications			8T		
● 最大地上扬程 Maximum ground lift			21m		
● 发动机 engine			● 生产方 Manufacturer		玉柴 (可定制) 58kw yuchai (Support customization) 58kw
			● 型号 model number		490CC
			● 启动方式 start mode		电启动 Electric start
			● 启动性能 start performance		-50℃-45℃
			● 燃料/容积 Fuel/Volume		柴油/35L Diesel oil/35L
			● 电池容量 Battery capacity		24v 45AH
● 操作系统 operating system			● 操作种类(吊臂/支腿)手动行走 Operation type (boom/leg), manual walking		手动操作、手动行走 (可选遥控) Manual operation, manual walking(Optional remote control)
			● 操作特性 Operational Characteristics		手动操作 (可选遥控) Manual operation(Optional remote control)
● 排放标准 Emission standard			国二 National Phase II		
● 整车尺寸 Vehicle Size			长6.15米, 宽1.6米, 高2.25米 6.15 meters length, 1.6 meters width, and 2.2 meters height		
● 履带(mm) Track (mm)			350(宽)52.5(节距)104(节) 350 (width) 52.5 (pitch) 104 (section)		

8T蜘蛛吊润滑部位图

8T spider crane lubrication parts diagram

注:转盘、大臂须定时**保养**(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / “Whenever the jibs are out, grease the jibs.”

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.
本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)




无线遥控器
wireless remote






10吨蜘蛛吊机 10-ton spider crane

● 性能特点 Performance Characteristics

- 钢制履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 机身紧凑，占用空间小。适用范围广泛
- 安全设计 可防止错误操作
- 可加遥控装置 操作便捷
- Steel tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- The body of the machine is compact and takes up little space. Wide range of application
- Safe design prevents incorrect operation
- Remote control can be added for easy operation

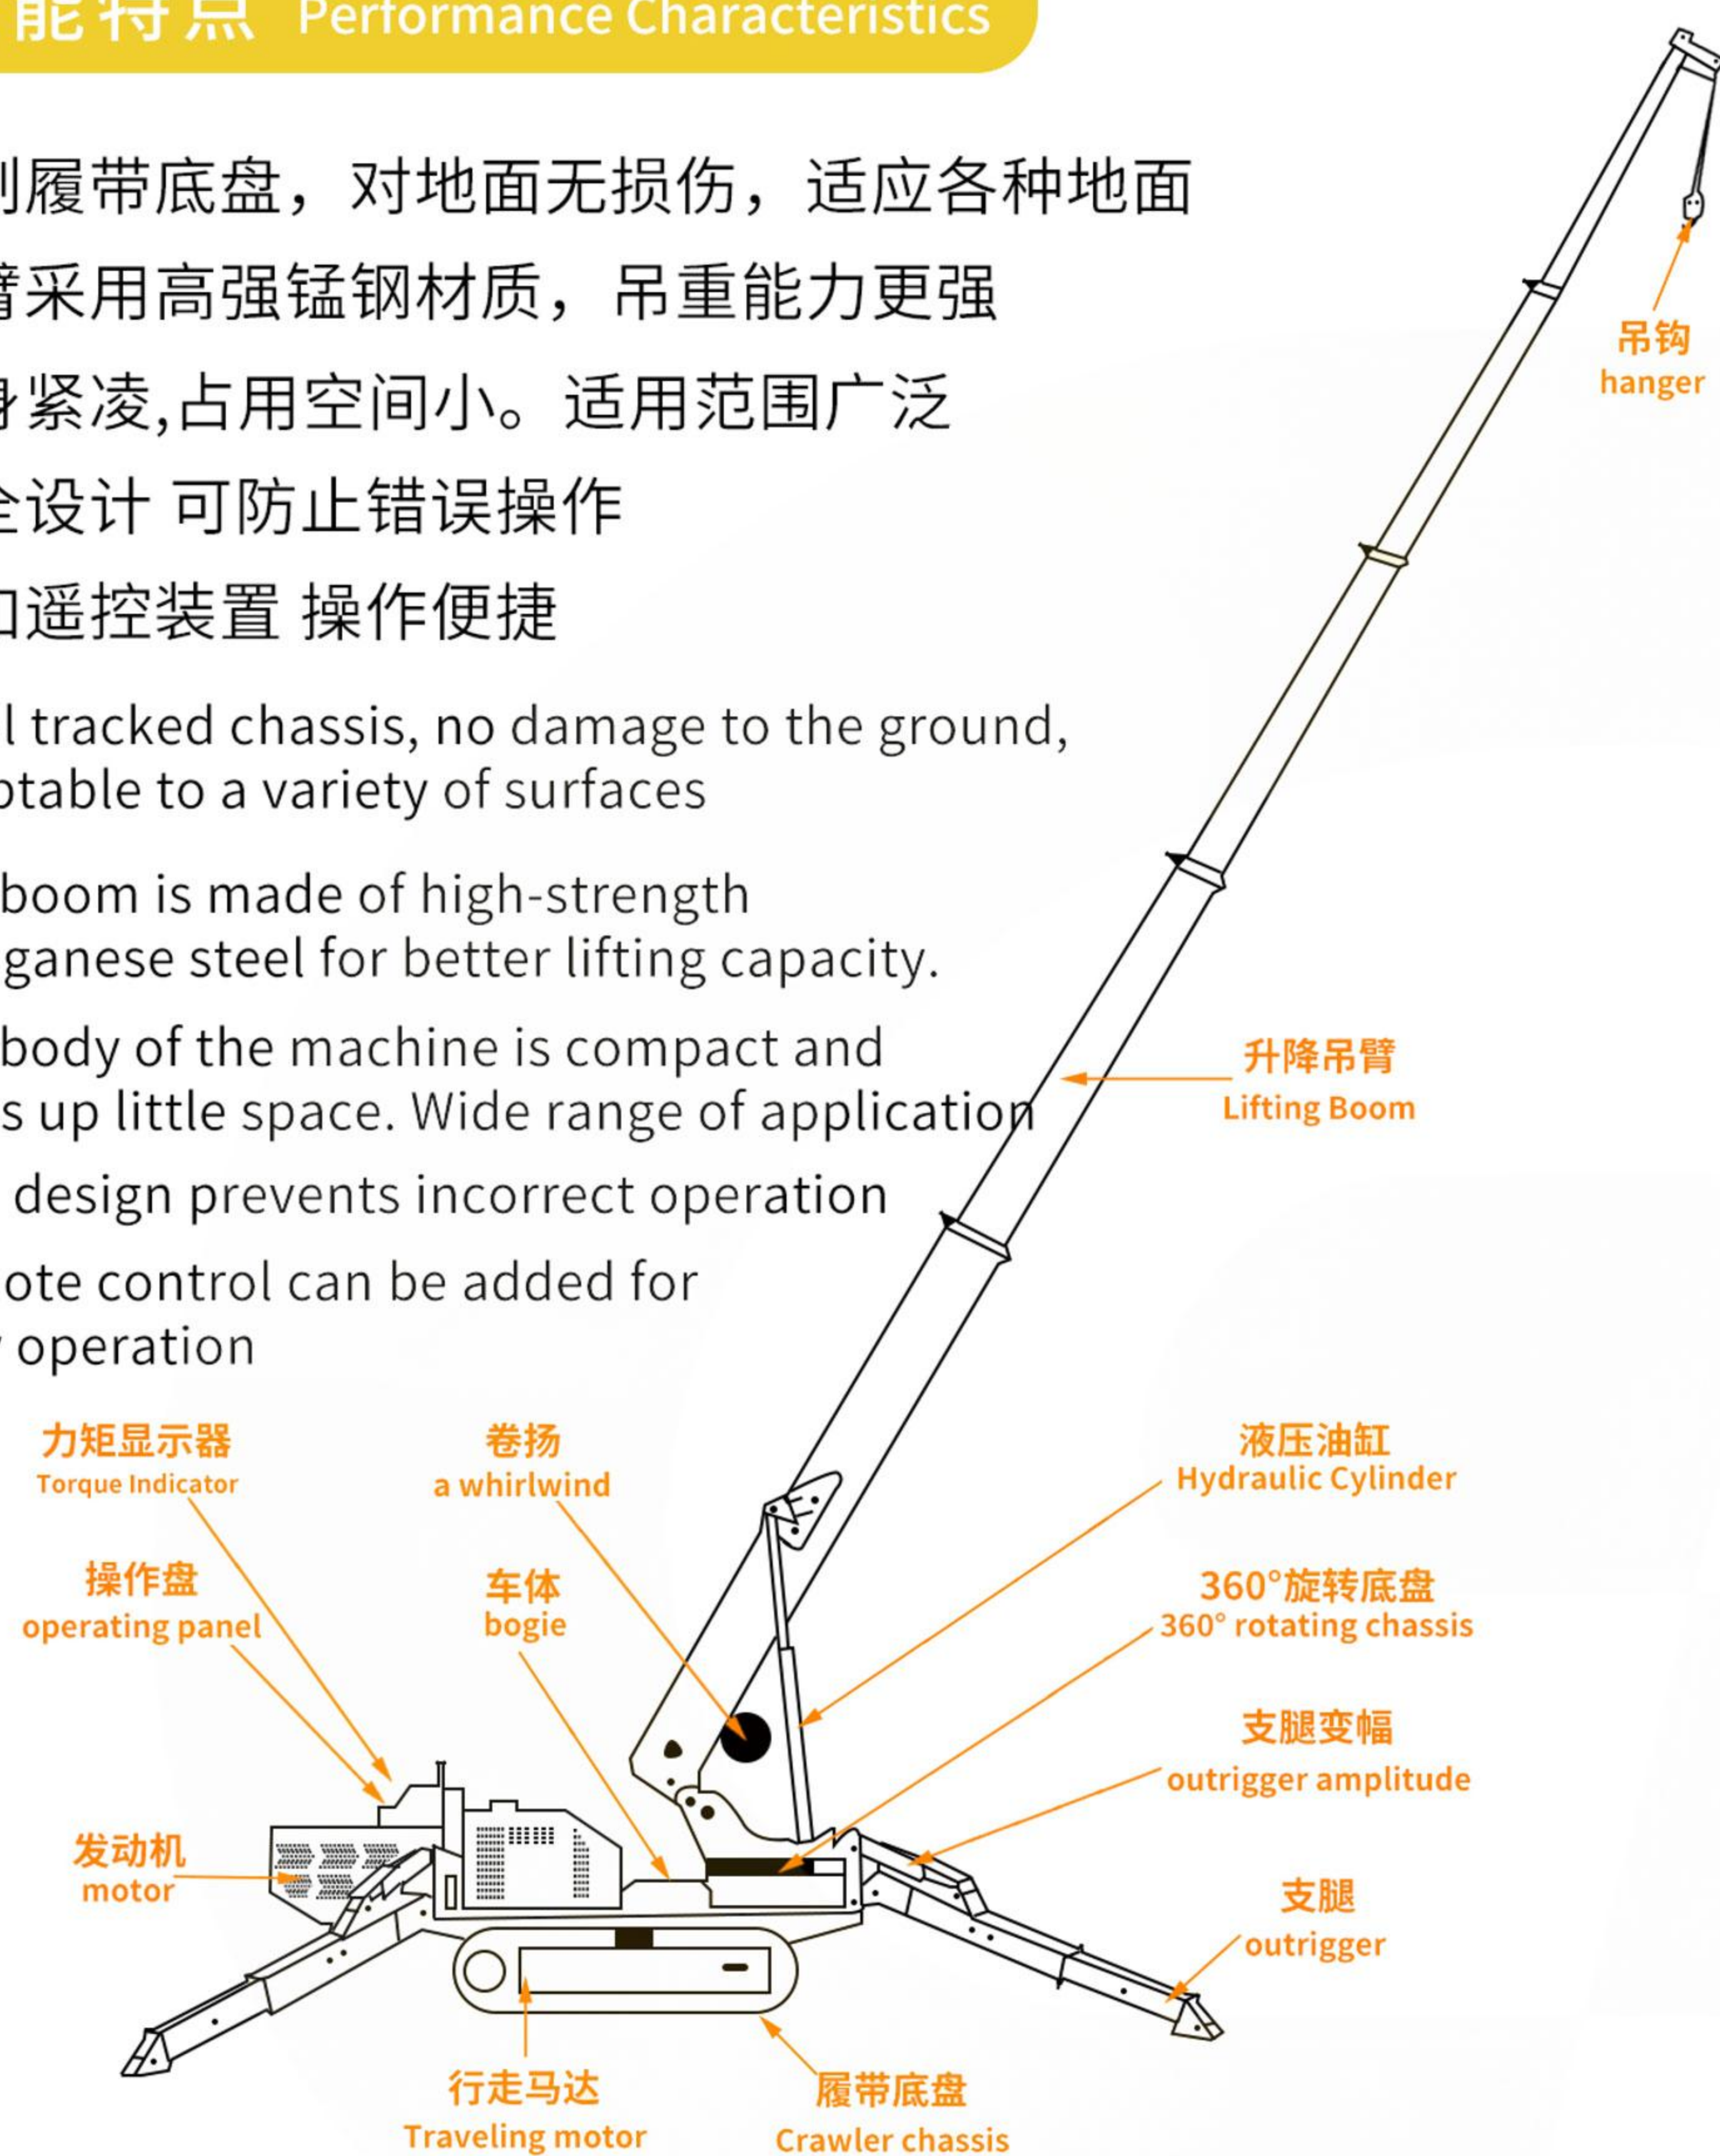

10吨蜘蛛吊机吊重表
10 ton spider crane lifting weight chart

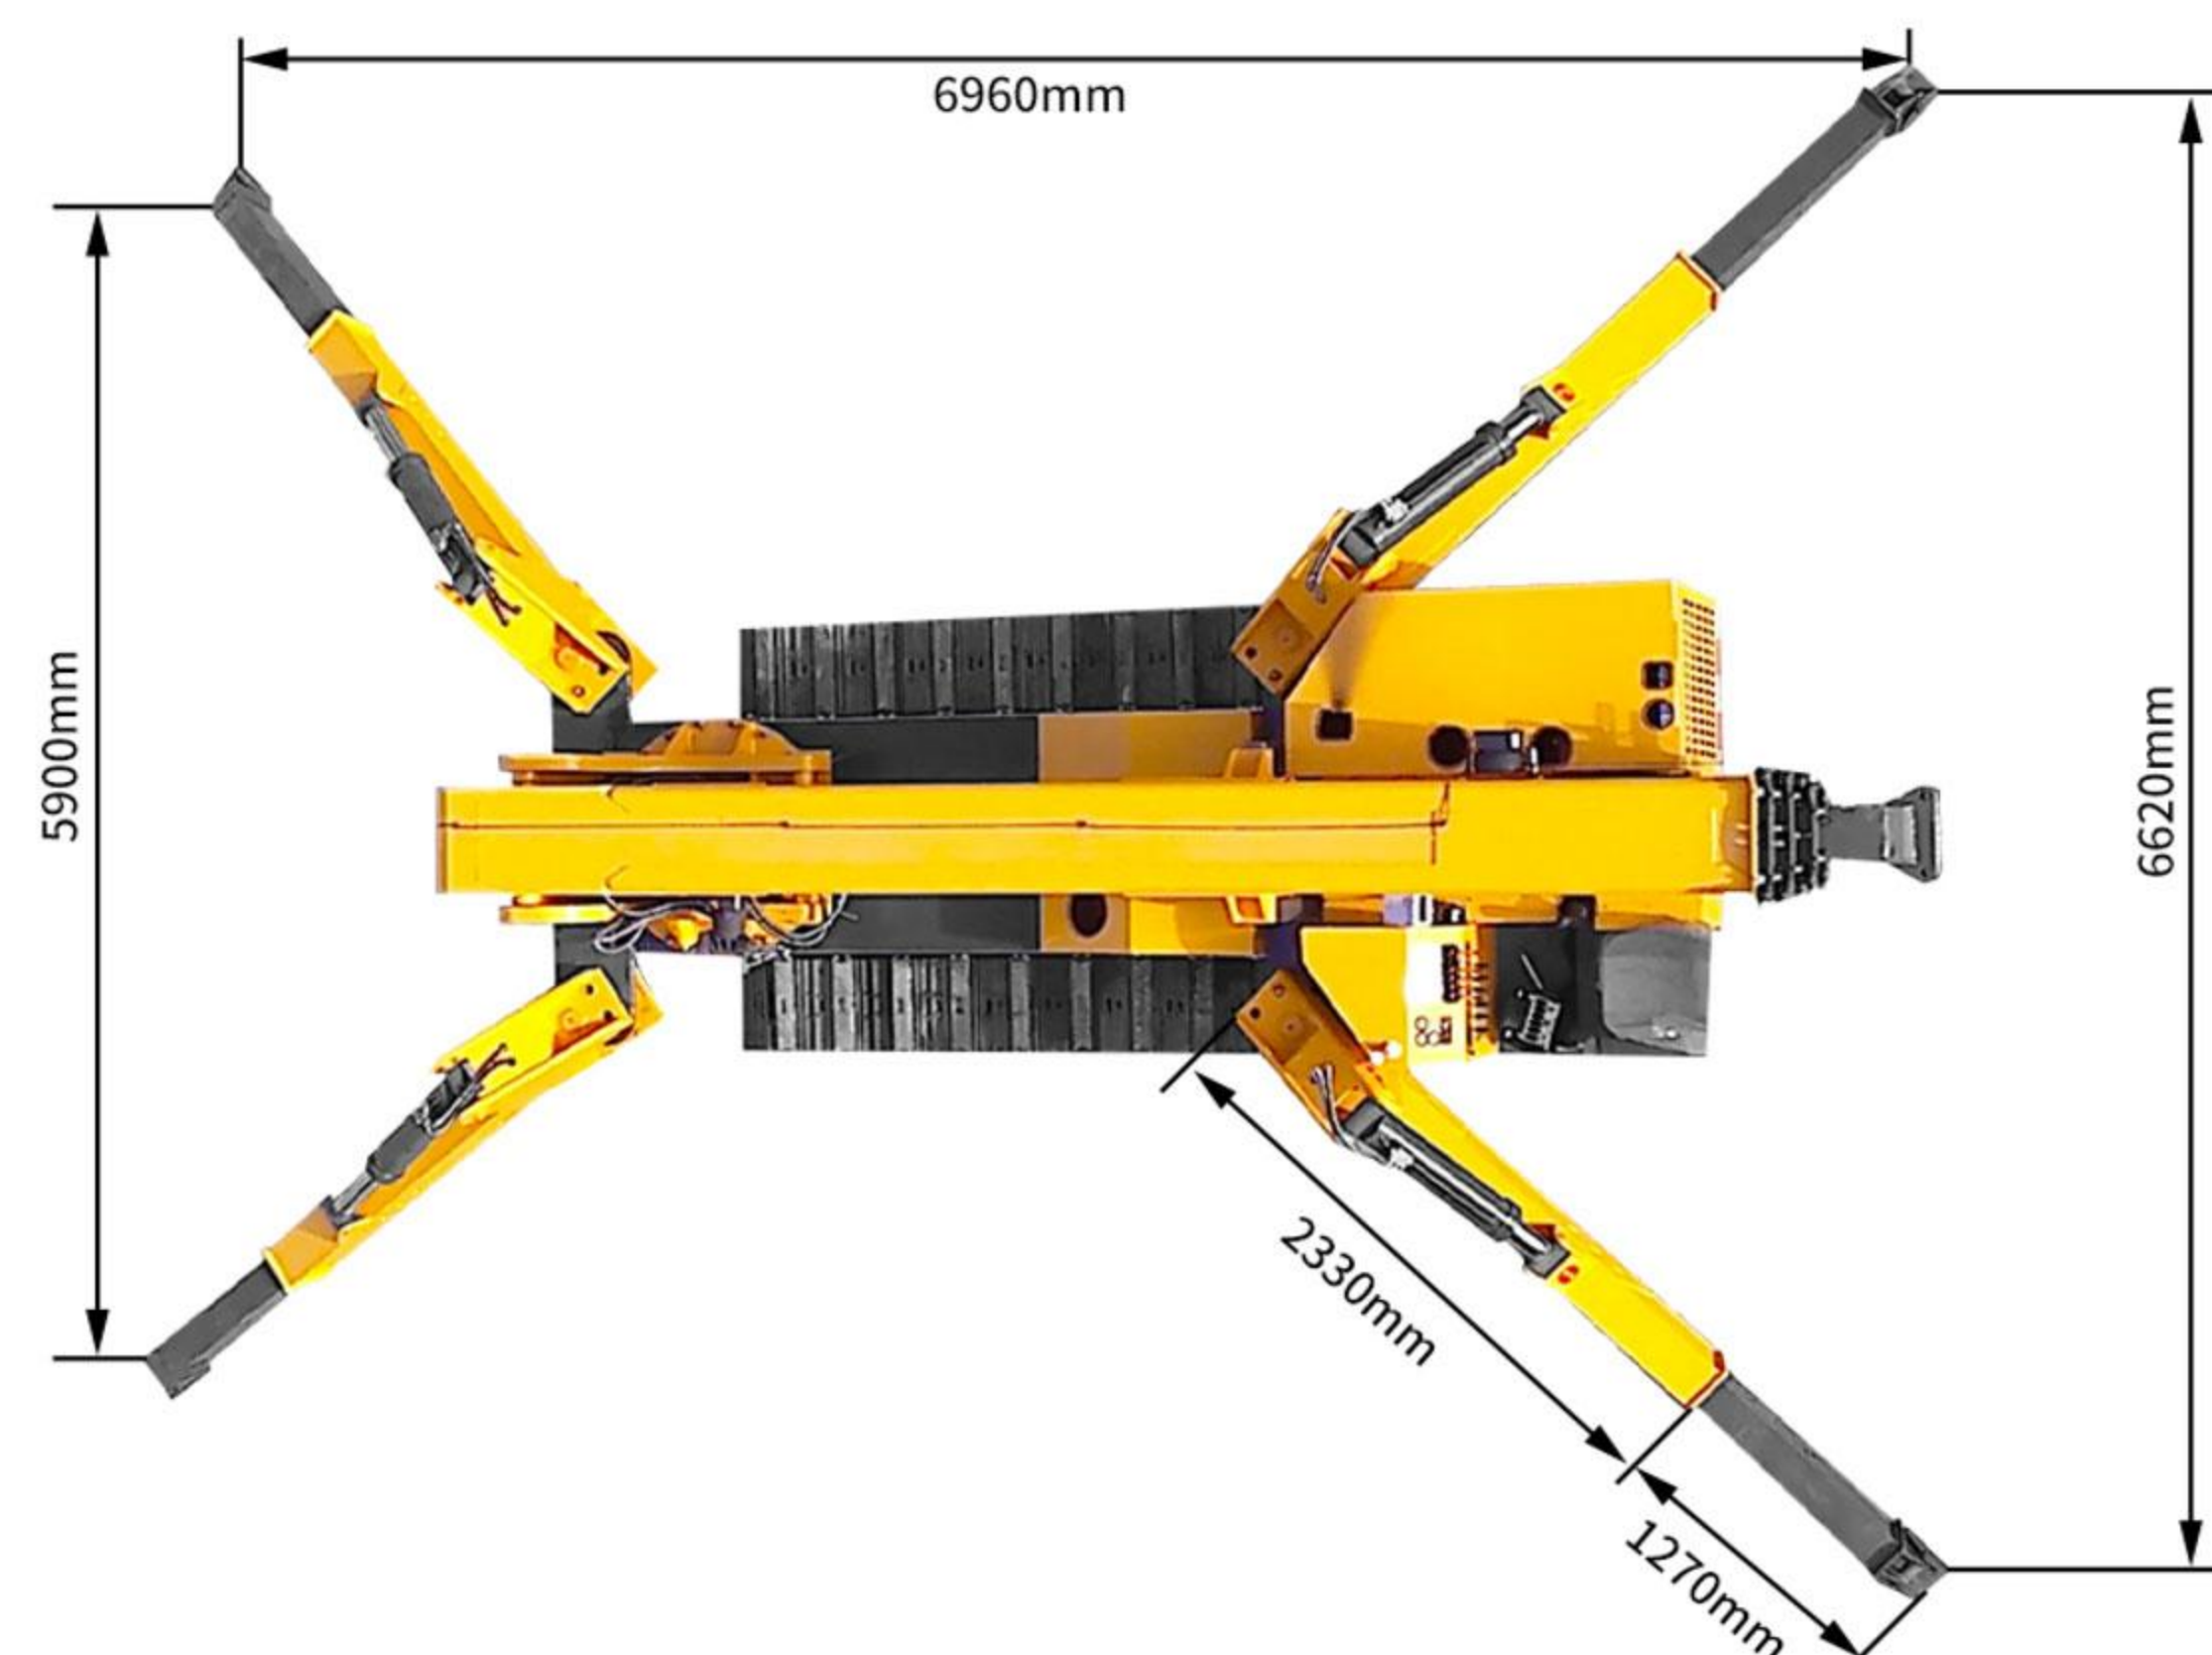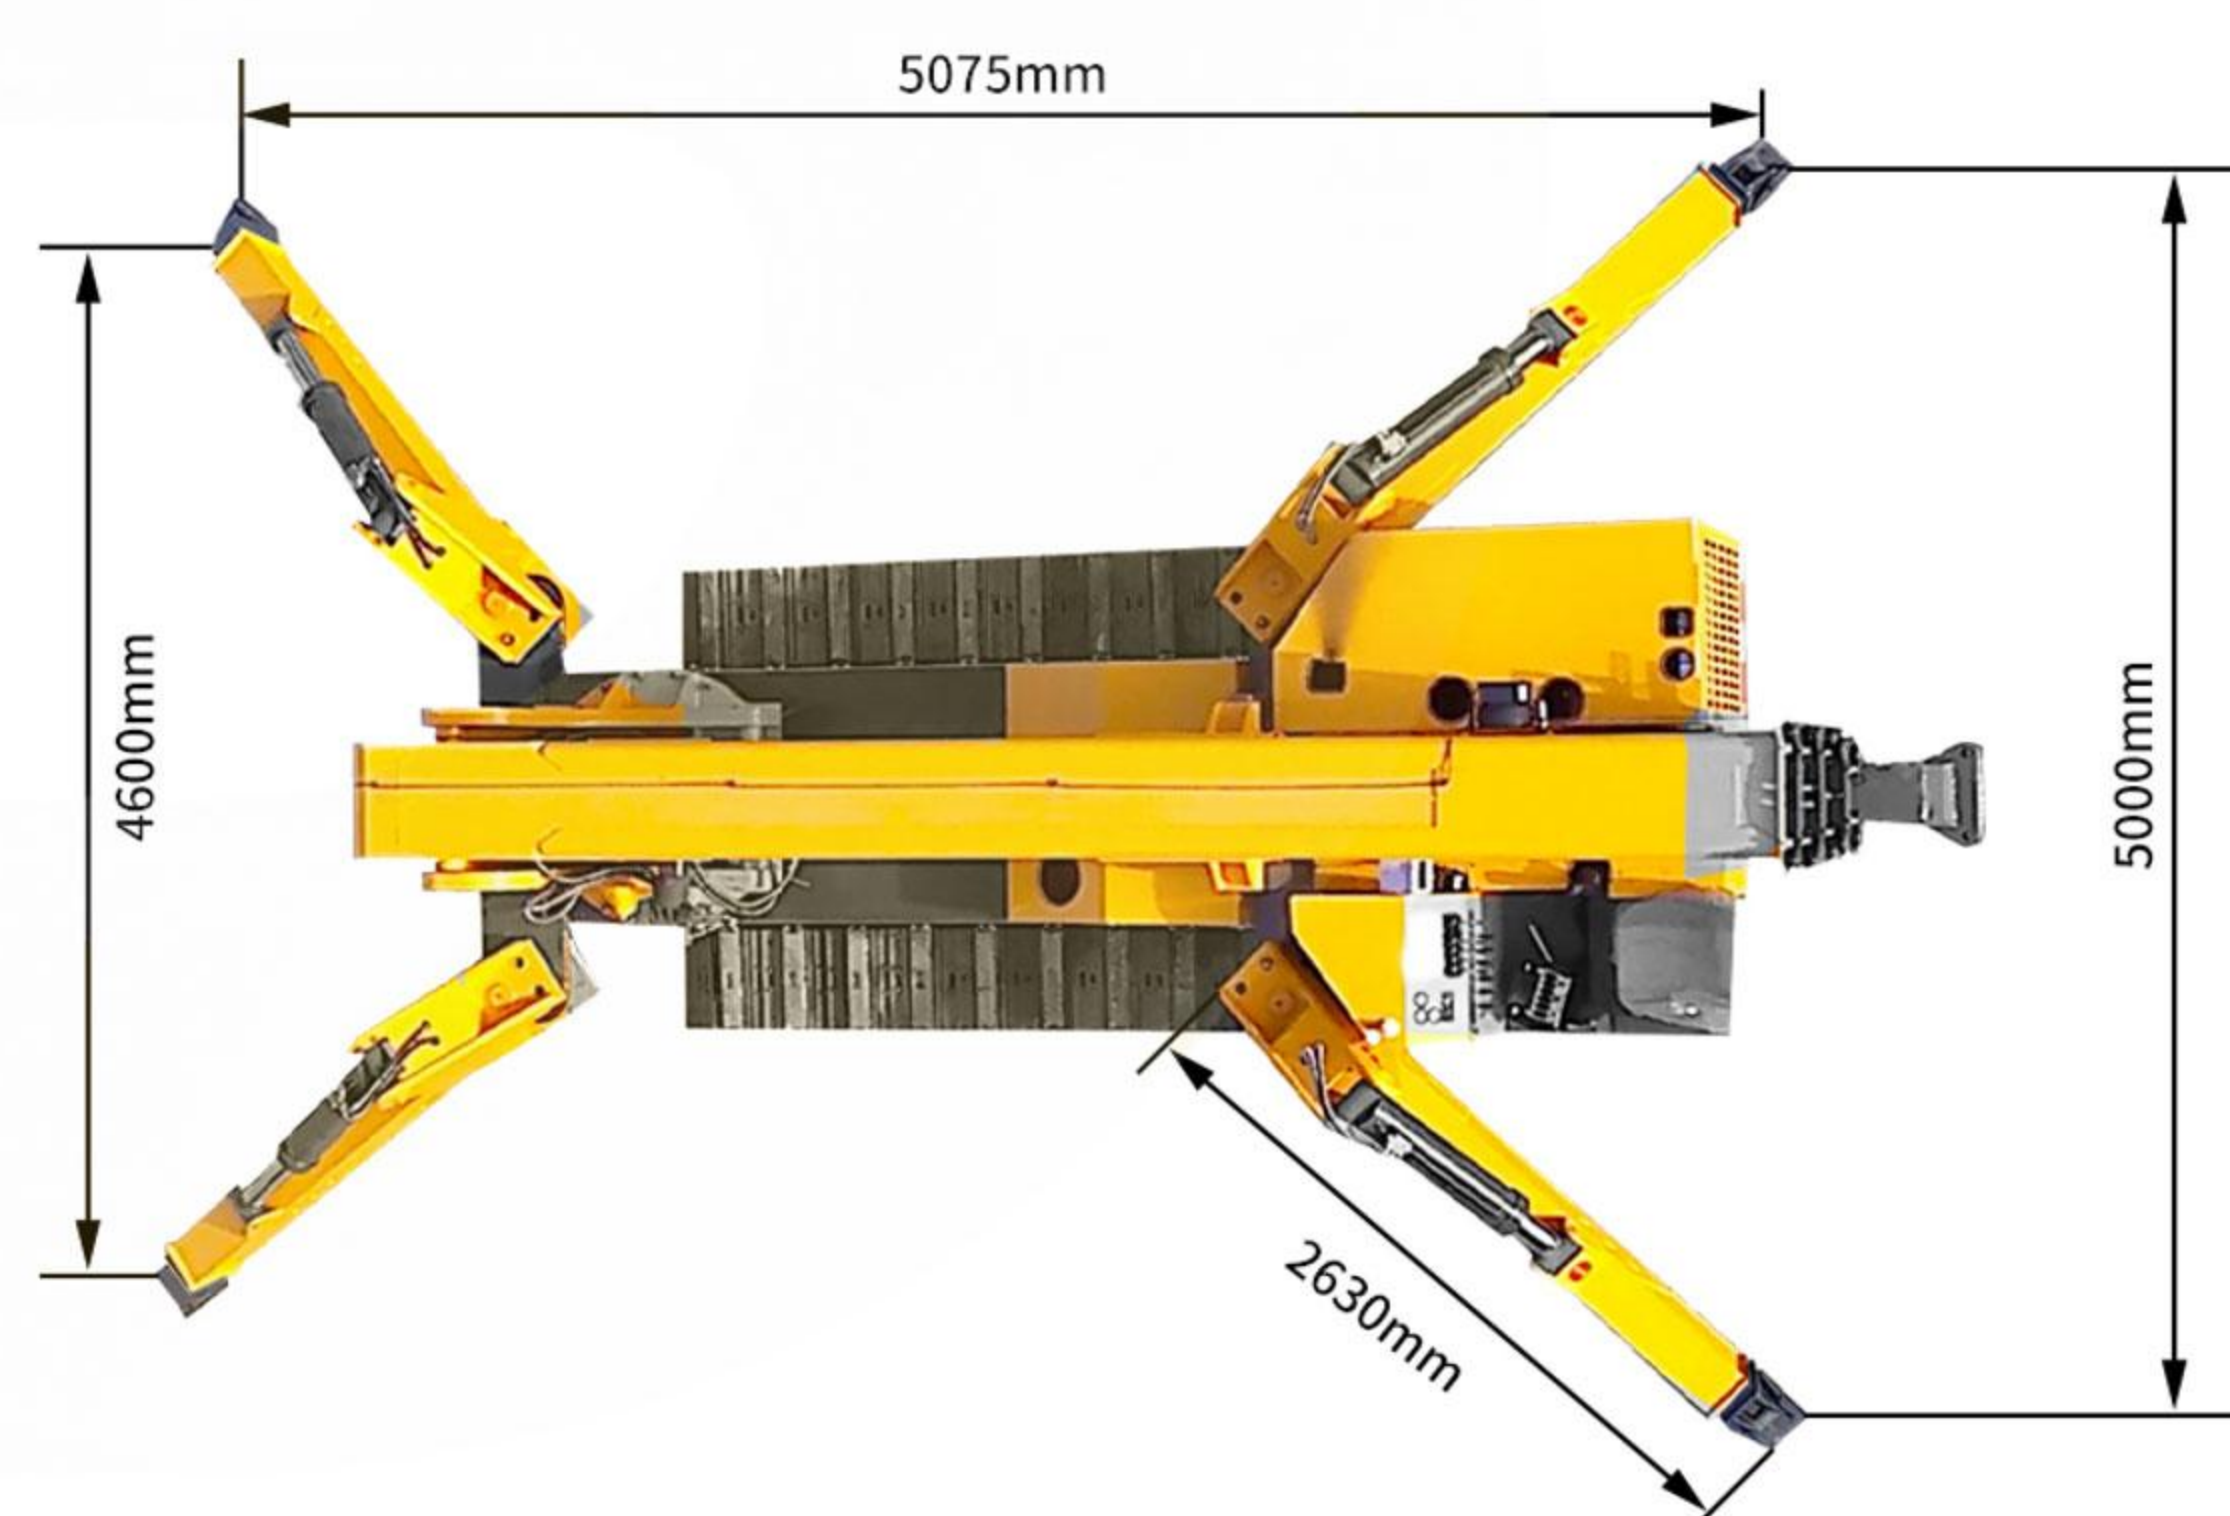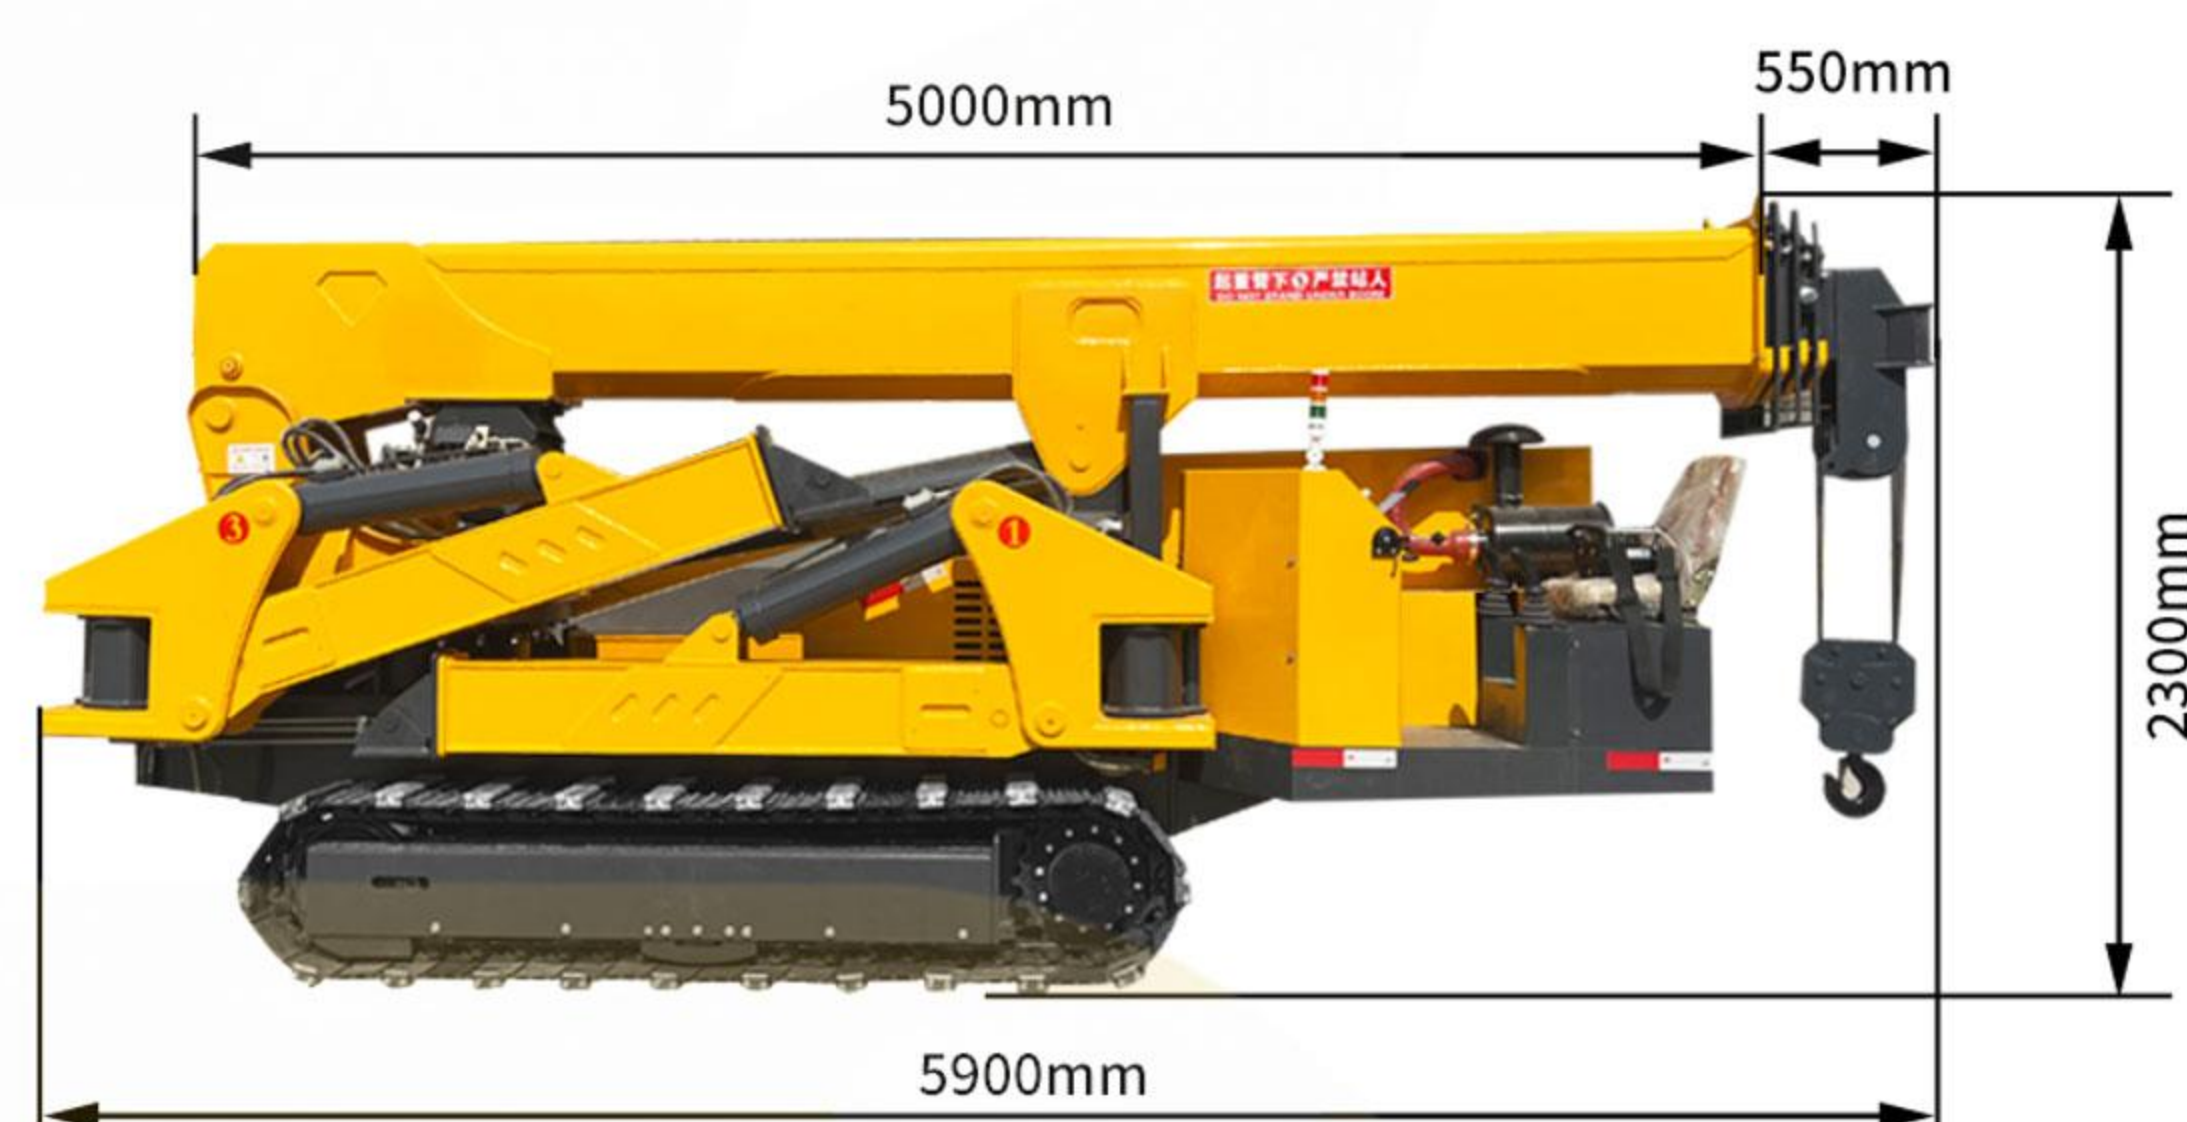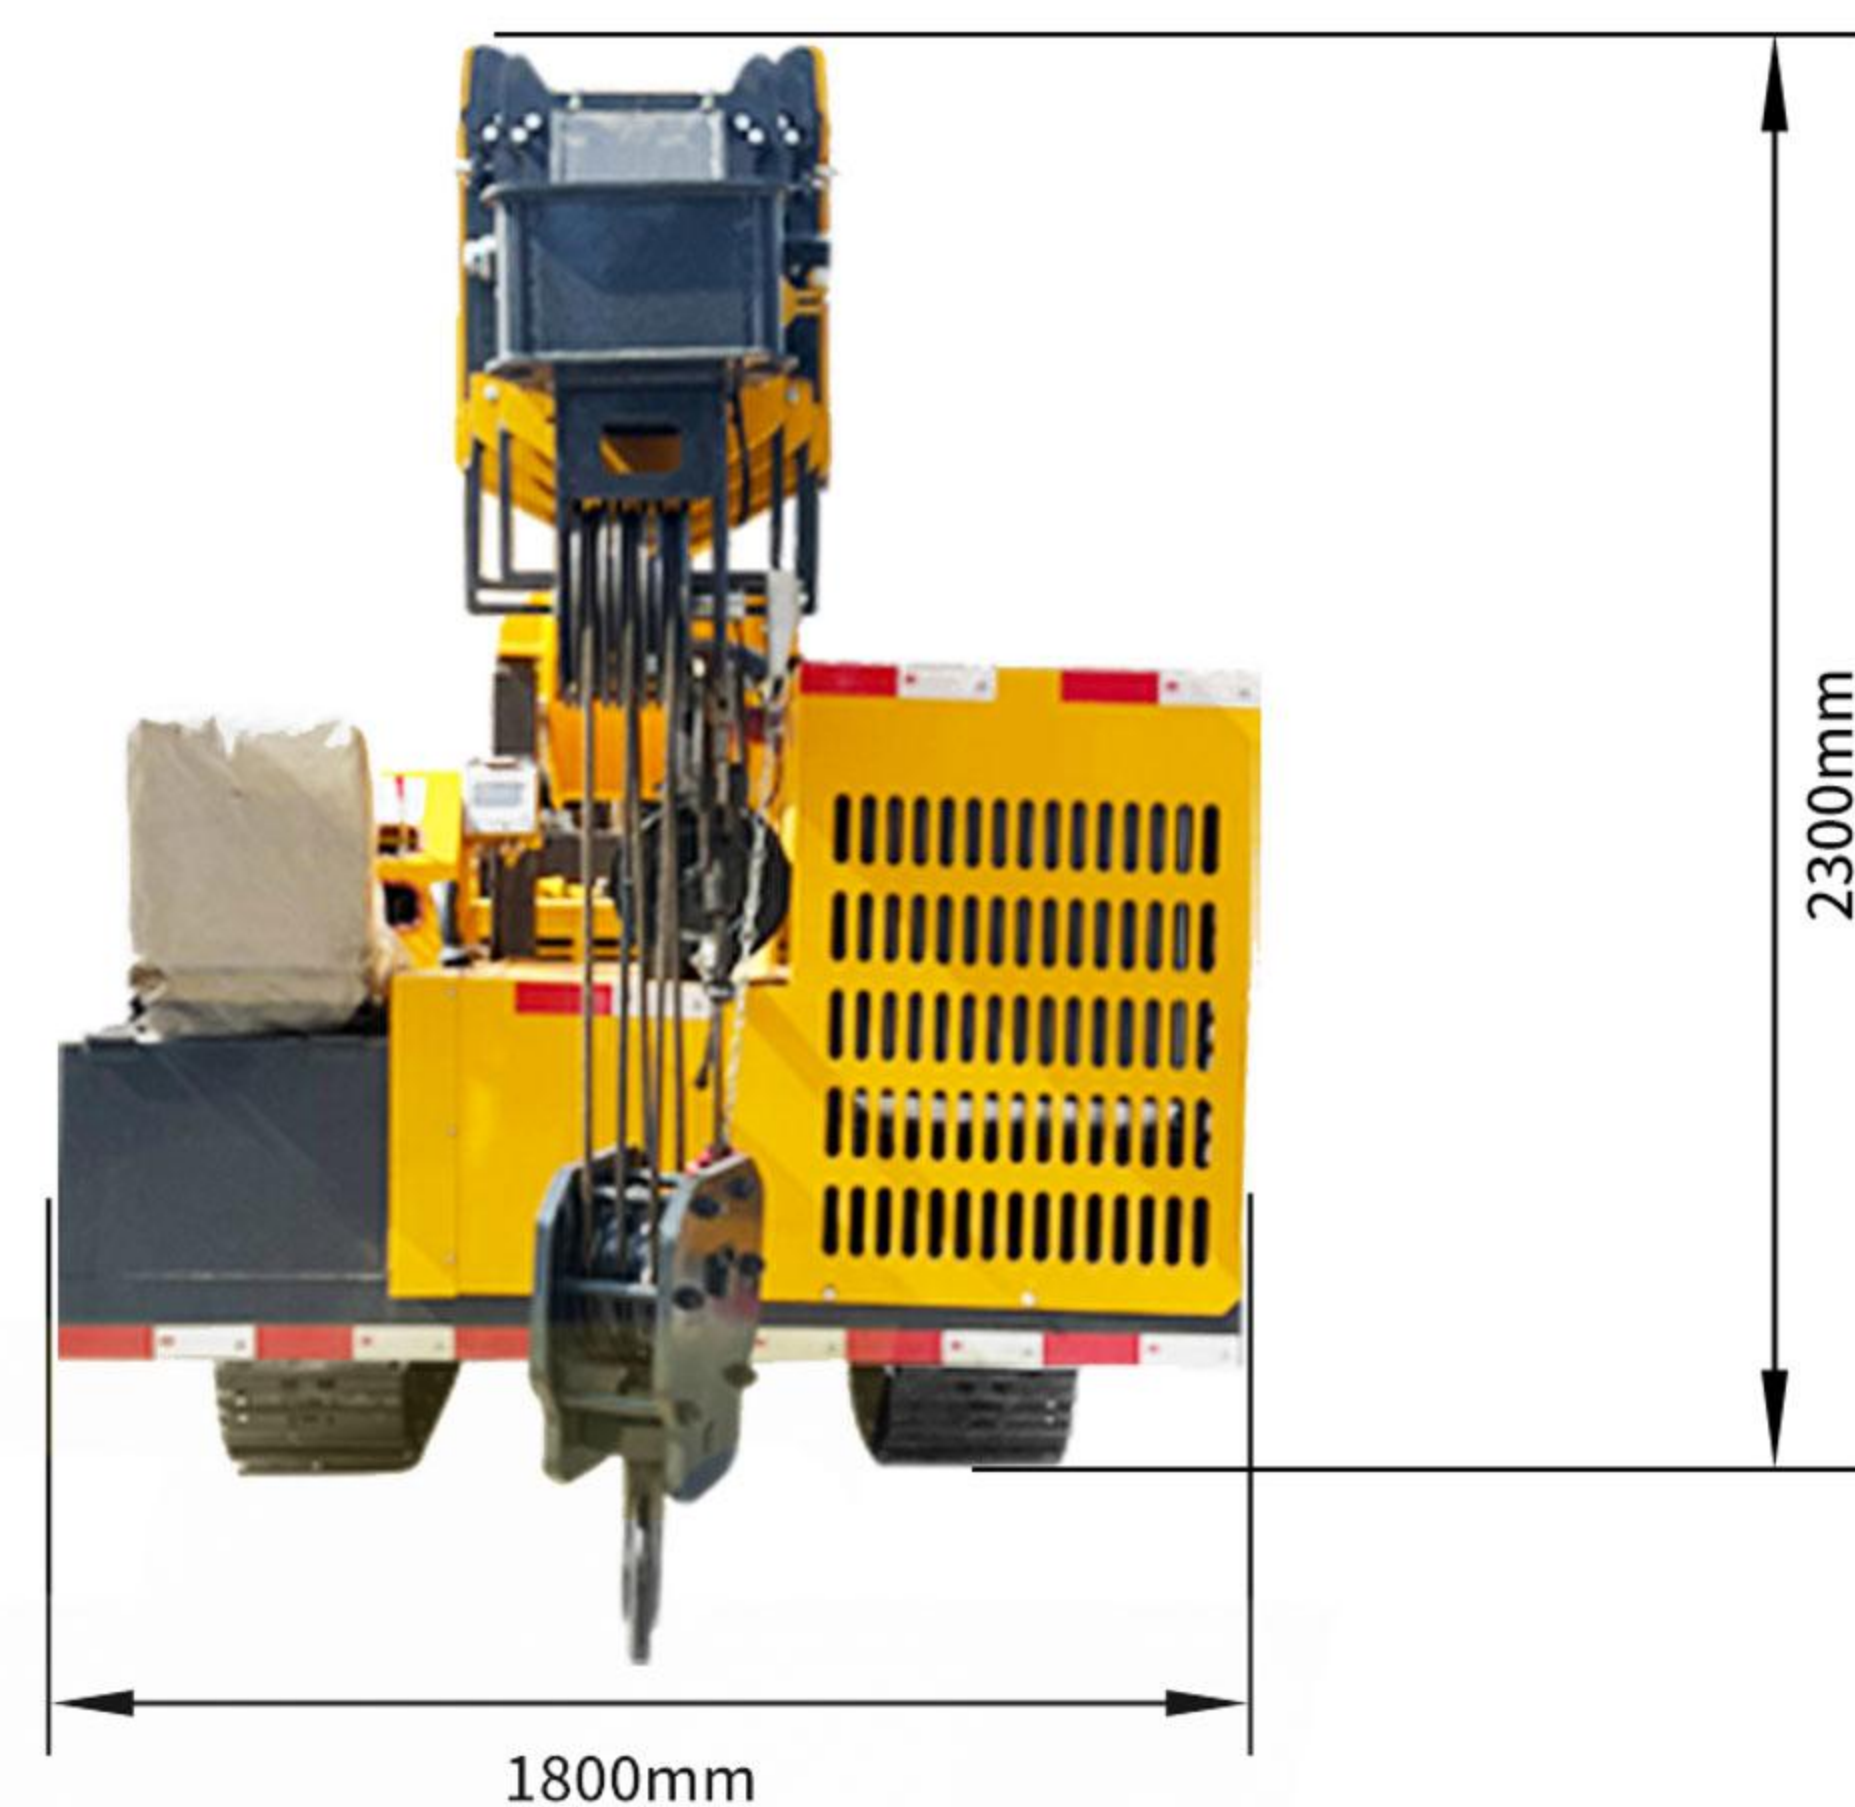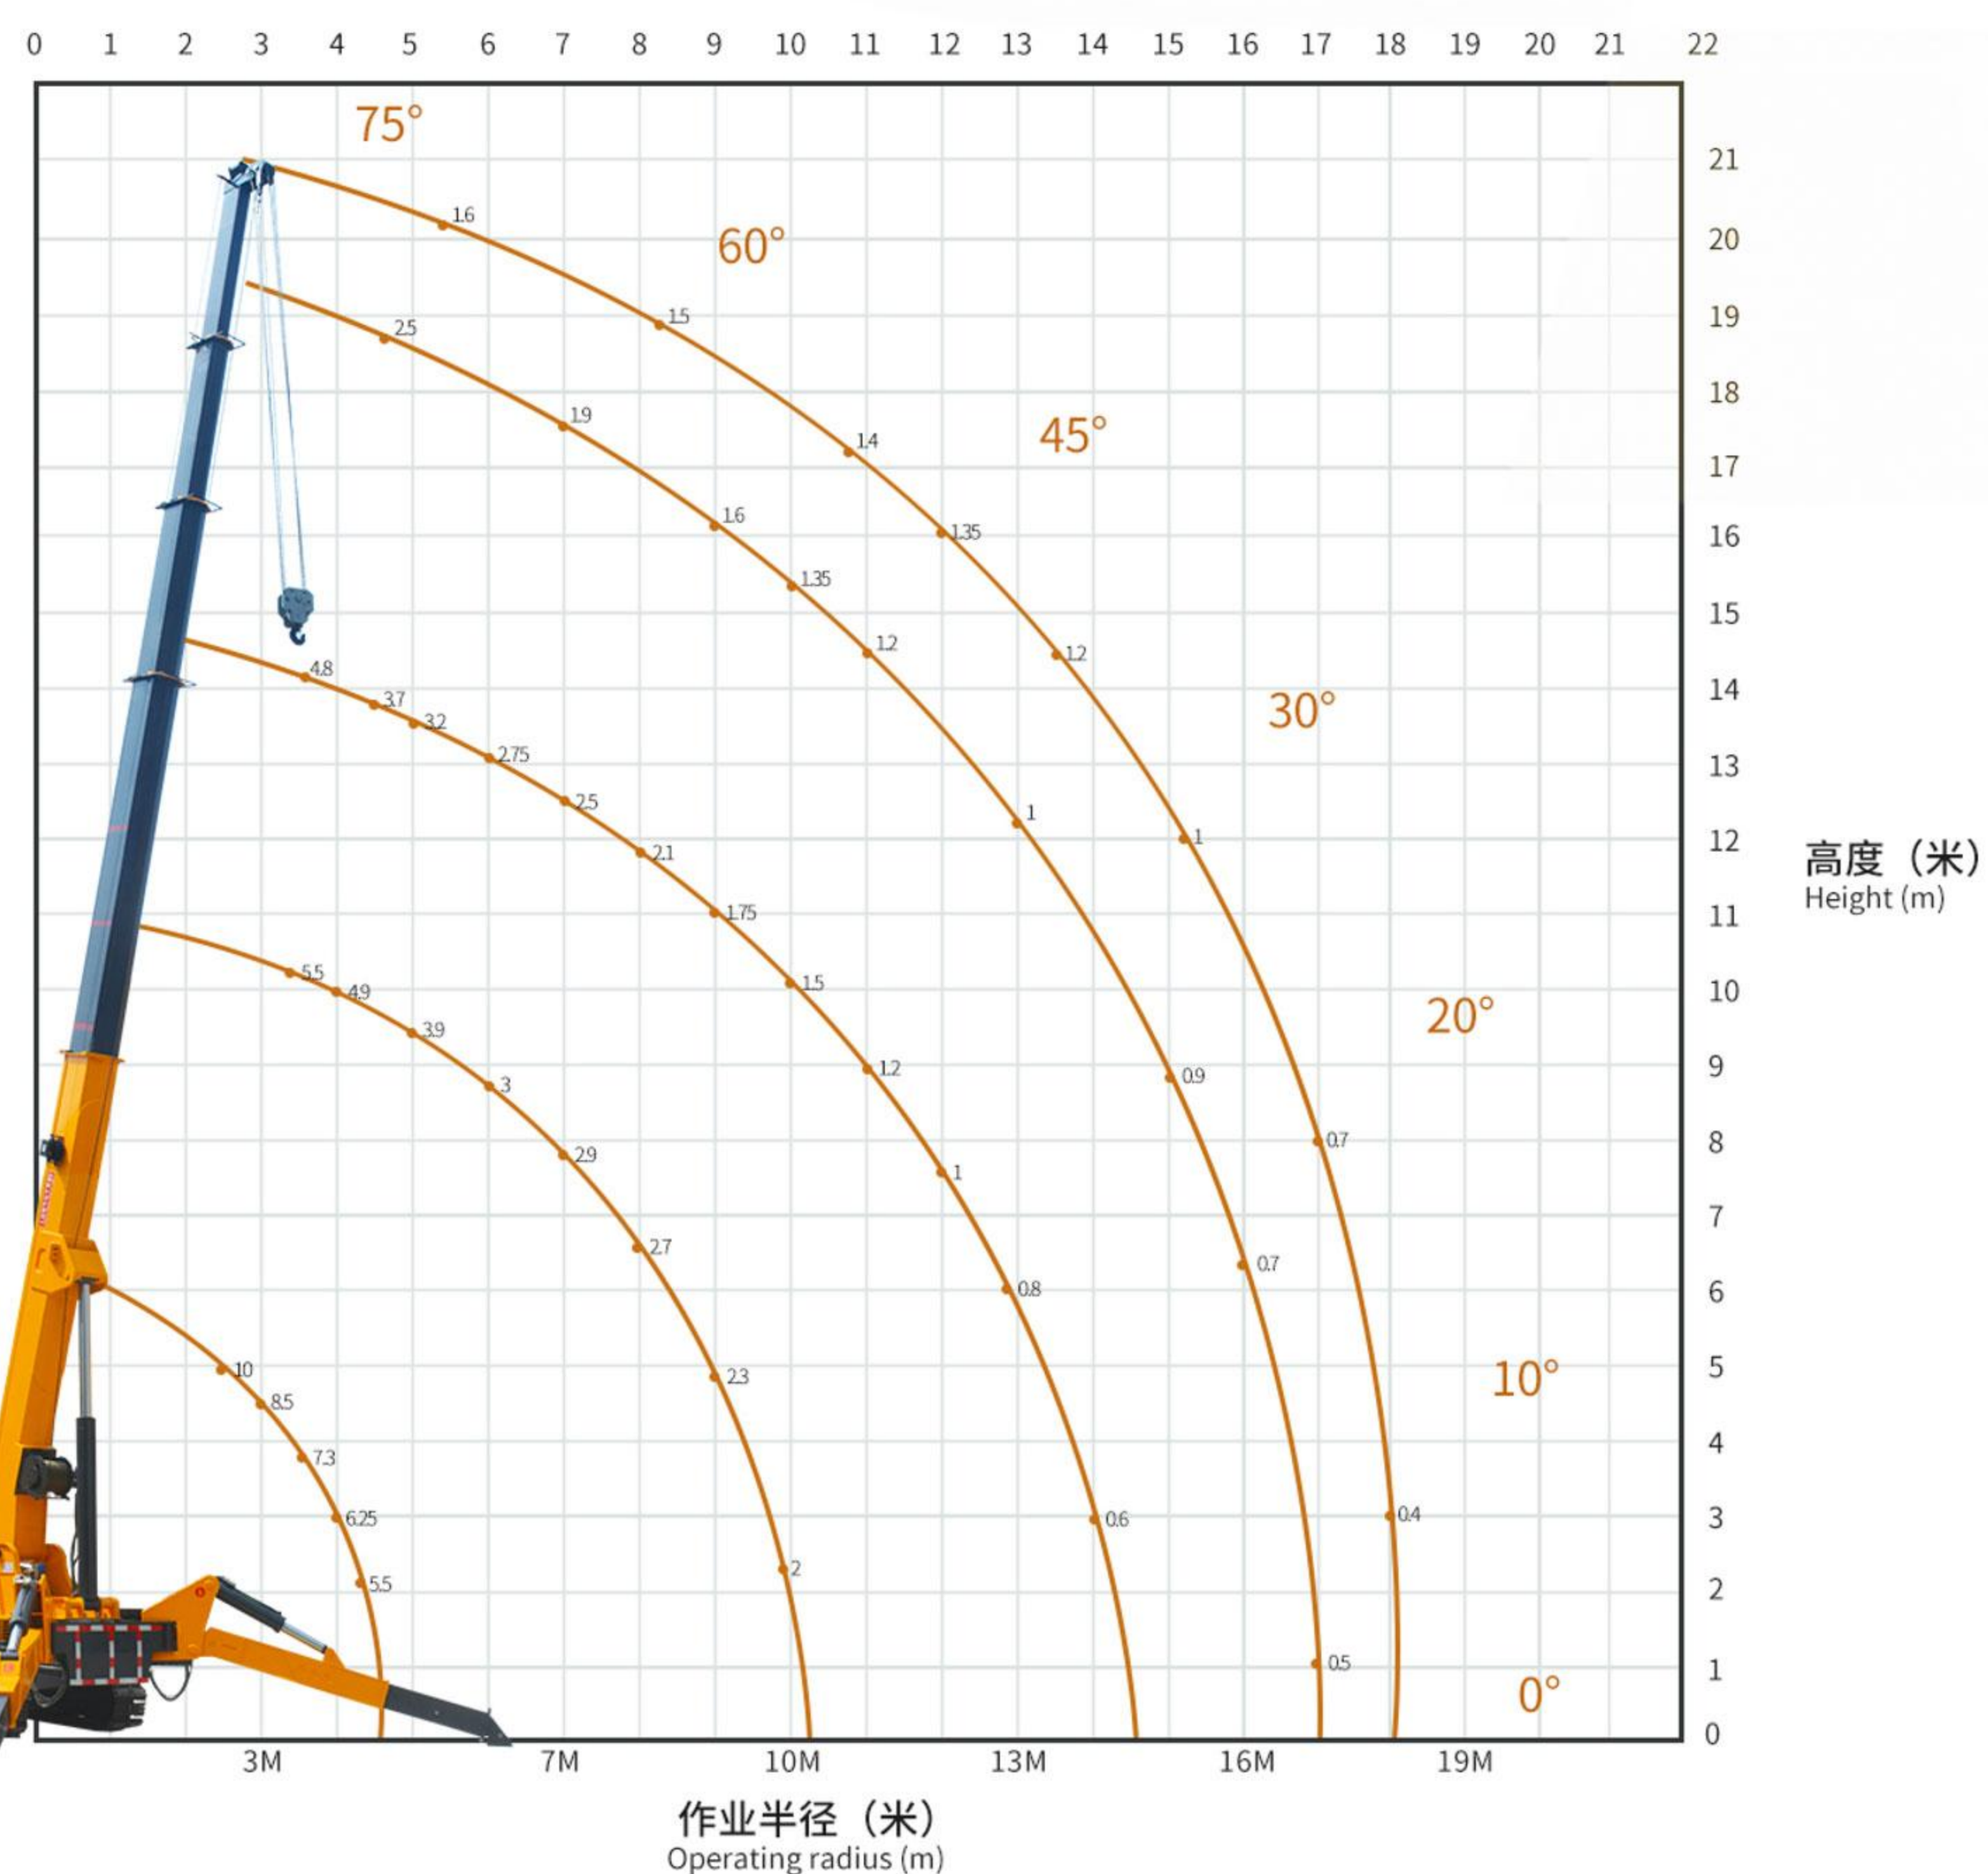

10吨蜘蛛吊机参数

10-ton Crawler Spider Crane

10T 蜘蛛吊机 10T Spider Crane			
自重 (T) dead-weight (T)		10.5T	规格 Specifications
最大作业半径 Maximum operating radius		18m	最大地上扬程 Maximum ground lift
卷扬装置 Winch device	吊钩上升速度 Hook lifting speed	11m/min (4绳) 双速 11m/min (4 ropes) double speed	生产方 Manufacturer
	钢丝绳规格 Specification of steel wire rope	Φ12mm×100m	云内 (可定制) 76kw Yunnei(Support customization)76kw
	卷扬机规格 Hoist specifications	10T	排放标准 Emission standard
伸缩装置 Telescopic device	伸缩臂形式 Telescopic arm form	5m*5节吊臂 (可定制) 5m*5-section lifting arm (Support customization)	启动方式 start mode
	吊臂长/时间 Boom length/time	12.3m/58sec (可定制) 12.3m/58sec (Support customization)	电启动 Electric start
	伸缩臂长度 Telescopic arm length	5.5m-21m	启动性能 start performance
支腿 Outrigger	支腿动作形式 Outrigger movement form	手动旋出+液压伸缩+液压支撑 Manual screw out + hydraulic telescopic + hydraulic support	燃料/容积 Fuel/Volume
	最大伸出幅度 (mm) Maximum extension amplitude (mm)	6960 (长) X5900 (后) X6620 (前) 6960(length) X 5900 (rear) X 6620 (front)	柴油/40L Diesel oil/40L
行走装置 running gear	行走方式 Walking mode	液压驱动 hydraulic drive	电池容量 Battery capacity
	行走速度 Walking speed	0-2.5km/h	24v 45AH
	爬坡能力 Gradeability	25°(36%)	操作种类 (吊臂/支腿) 手动行走 Operation type (boom/leg), manual walking
	履带结构 Track structure	钢制履带 Steel track	手动操作、手动行走 (可选遥控操作) Manual operation, manual travel (optional remote control operation)
可选装 Optional		可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black	
		操作系统 operating system	操作特性 Operational Characteristics
		变幅装置 Luffing device	手动操作 (可选遥控) Manual operation(Optional remote control)
		回旋装置 gyroscope	吊臂角度/时间 Boom angle/time
		整车尺寸 Vehicle Size	0-78°/15sec
		履带 (mm) Track (mm)	回转角度/速度 Rotation angle/speed
			0-360°(连续) /40sec 0-360° (continuous)/40sec
			长5.9米 宽1.8米 高2.3米 5.9meters long, 1.8meters wide, and 2.3m
			135(节距)41(节) 300(宽) 135(pitch)41 (section)300 (width)

10T蜘蛛吊润滑部位图

10T spider crane lubrication parts diagram

注:转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / "Whenever the jibs are out, grease the jibs."

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.
本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)




无线遥控器
wireless remote






12吨蜘蛛吊机 12-ton spider crane

● 性能特点 Performance Characteristics

- 钢制履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 机身紧凑,占用空间小。适用范围广泛
- 安全设计 可防止错误操作
- 可加遥控装置 操作便捷
- Steel tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- The body of the machine is compact and takes up little space. Wide range of application
- Safe design prevents incorrect operation
- Remote control can be added for easy operation

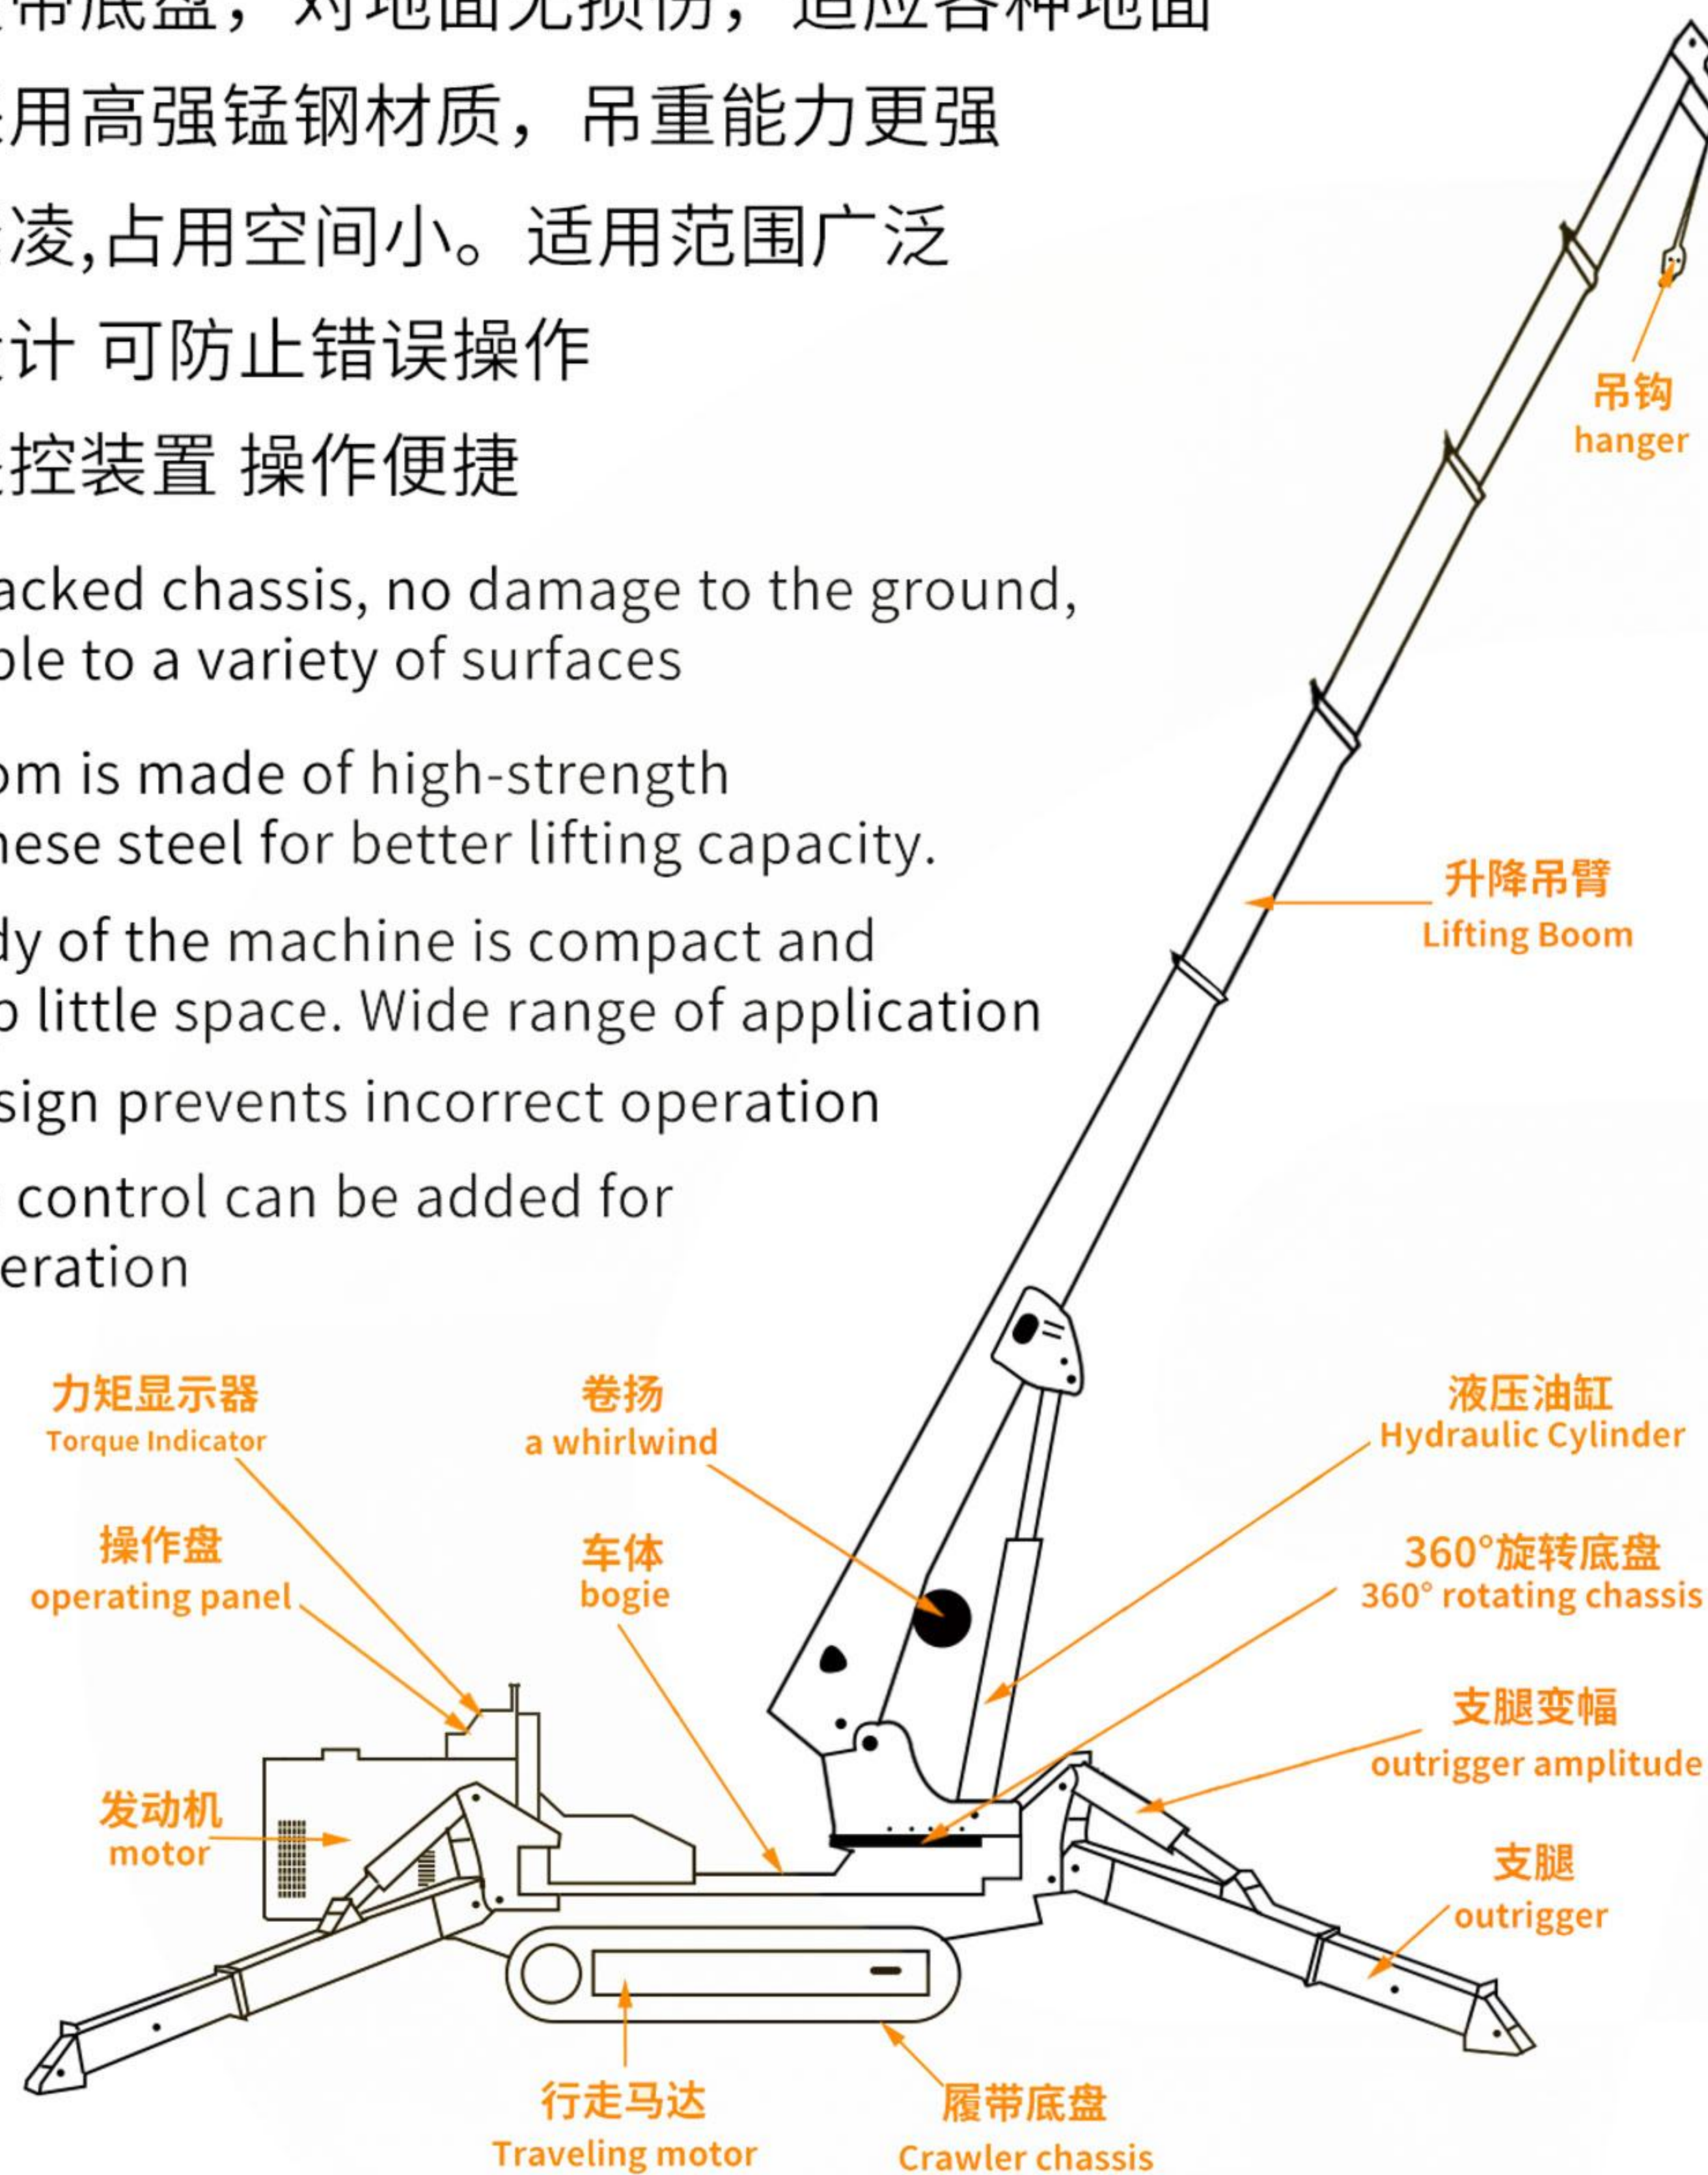

12吨蜘蛛吊机吊重表
12 ton spider crane lifting weight chart

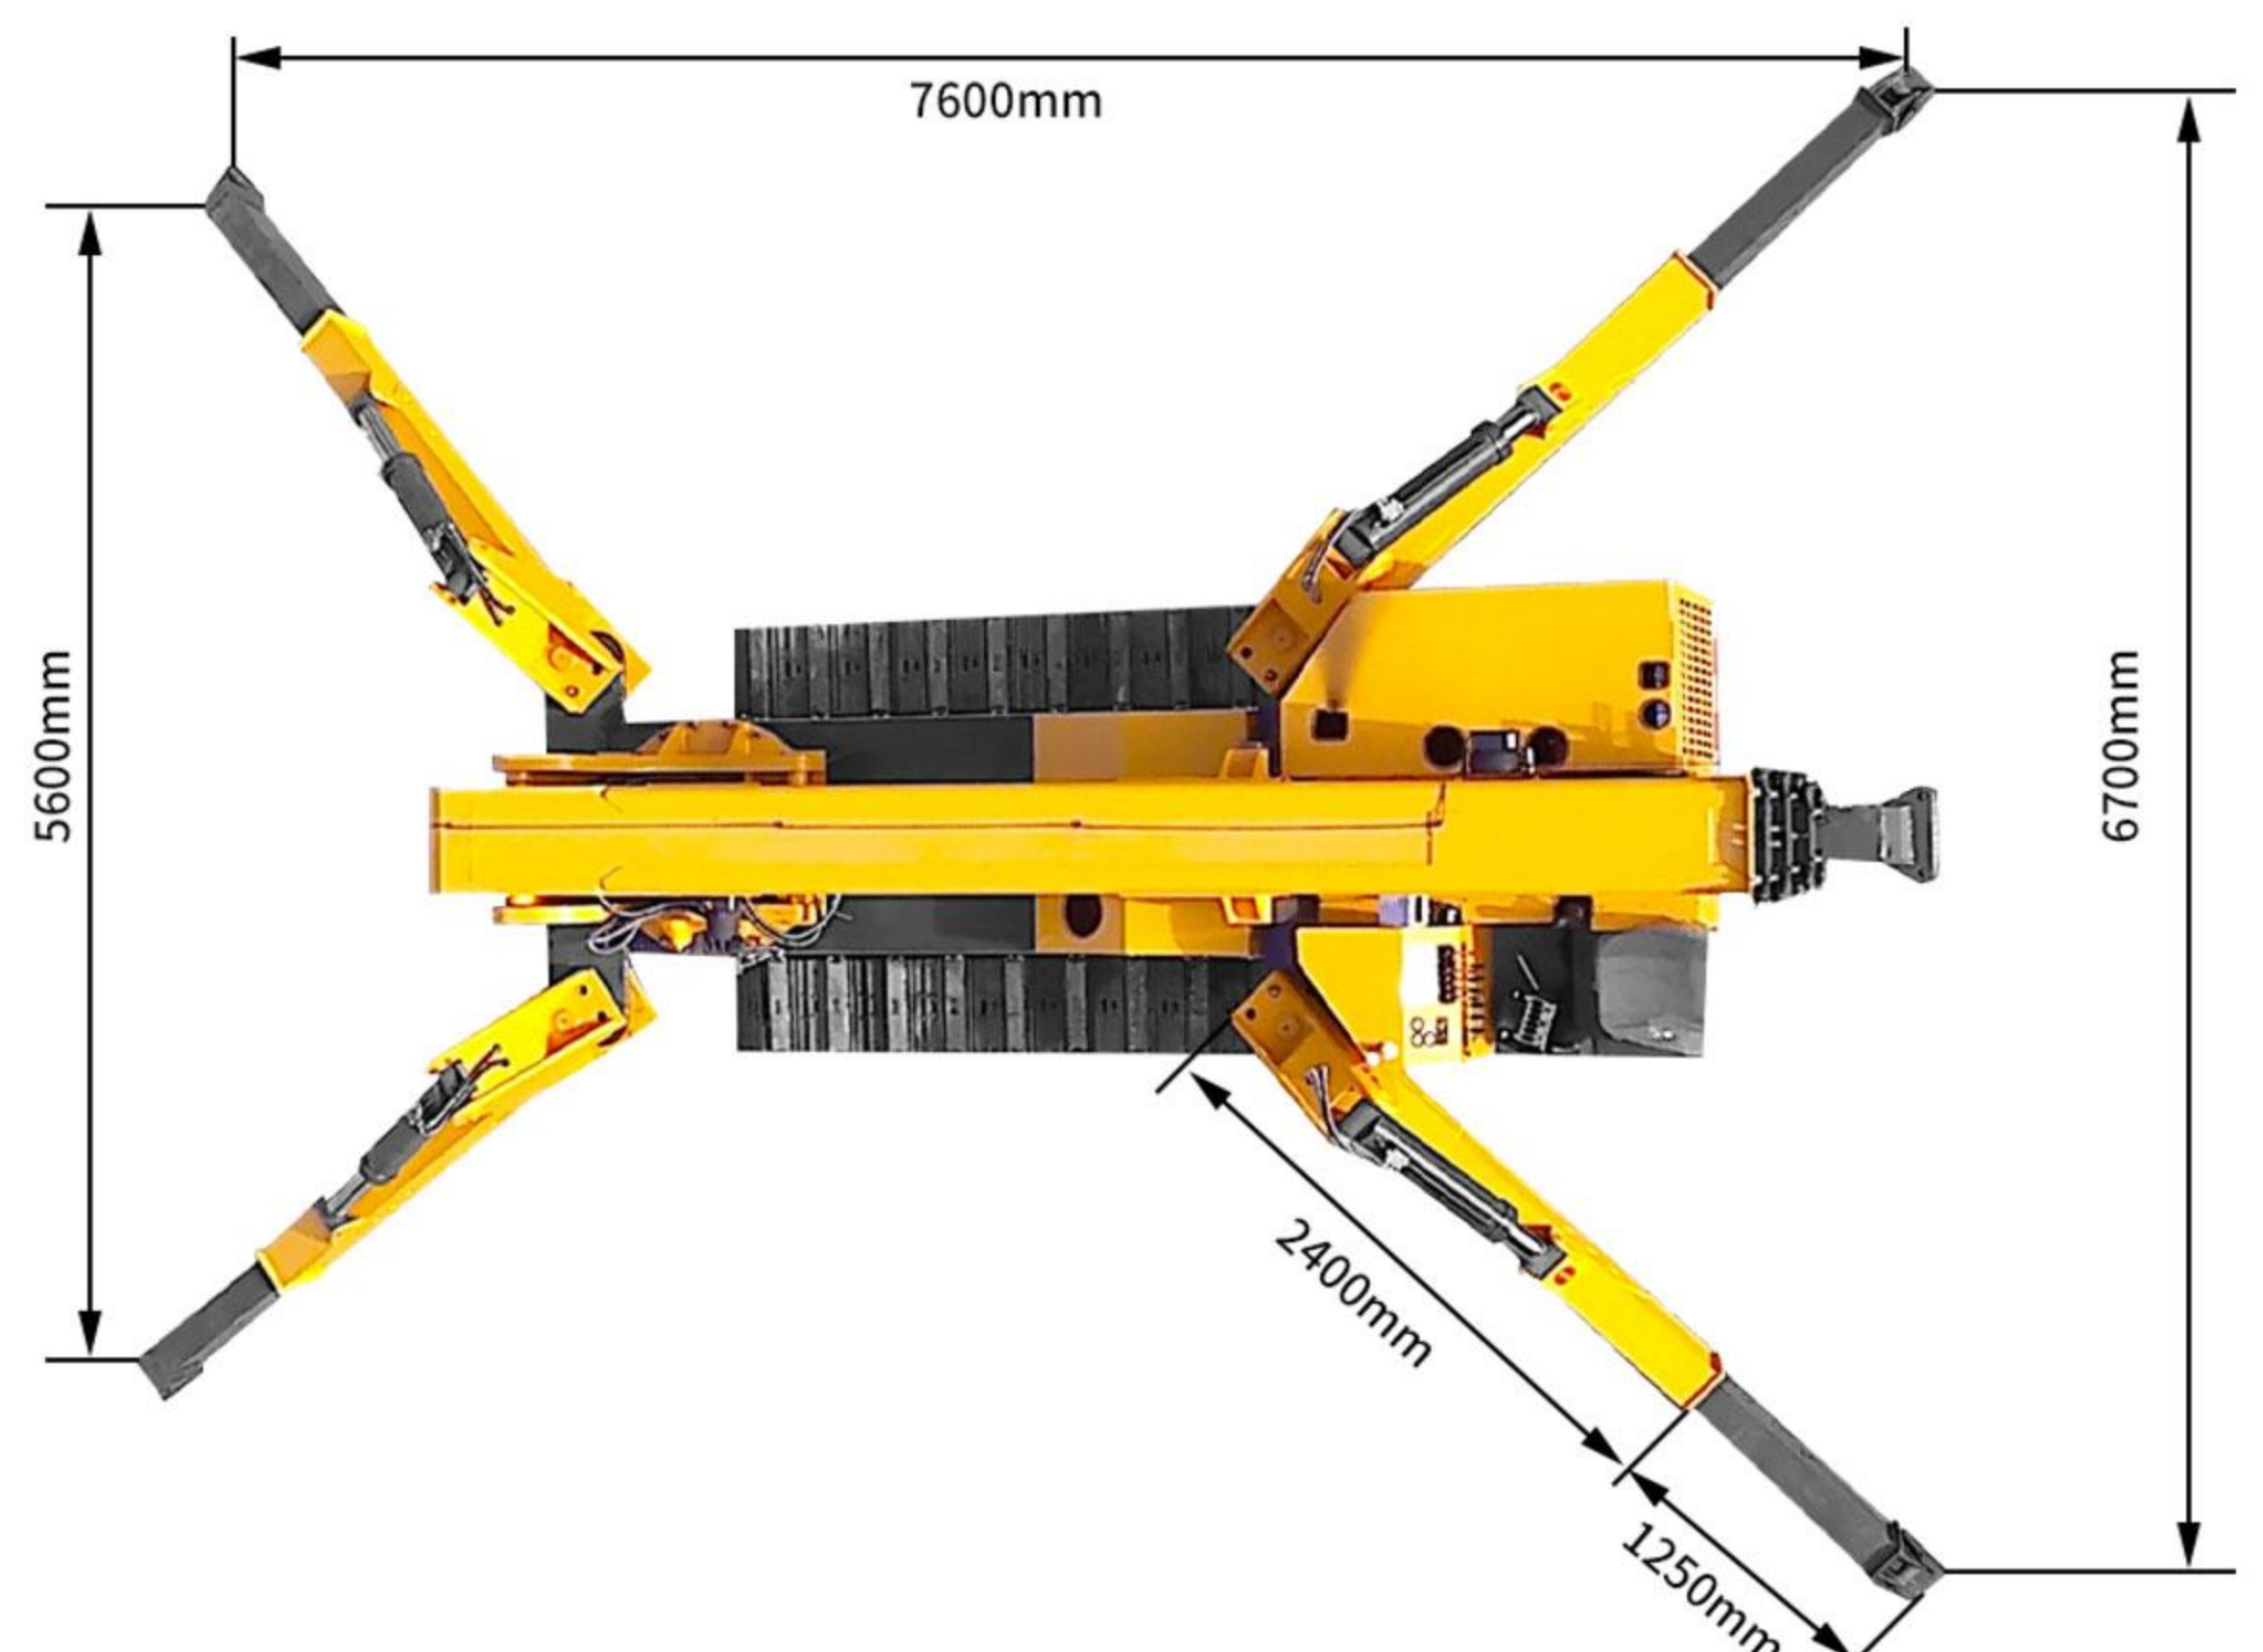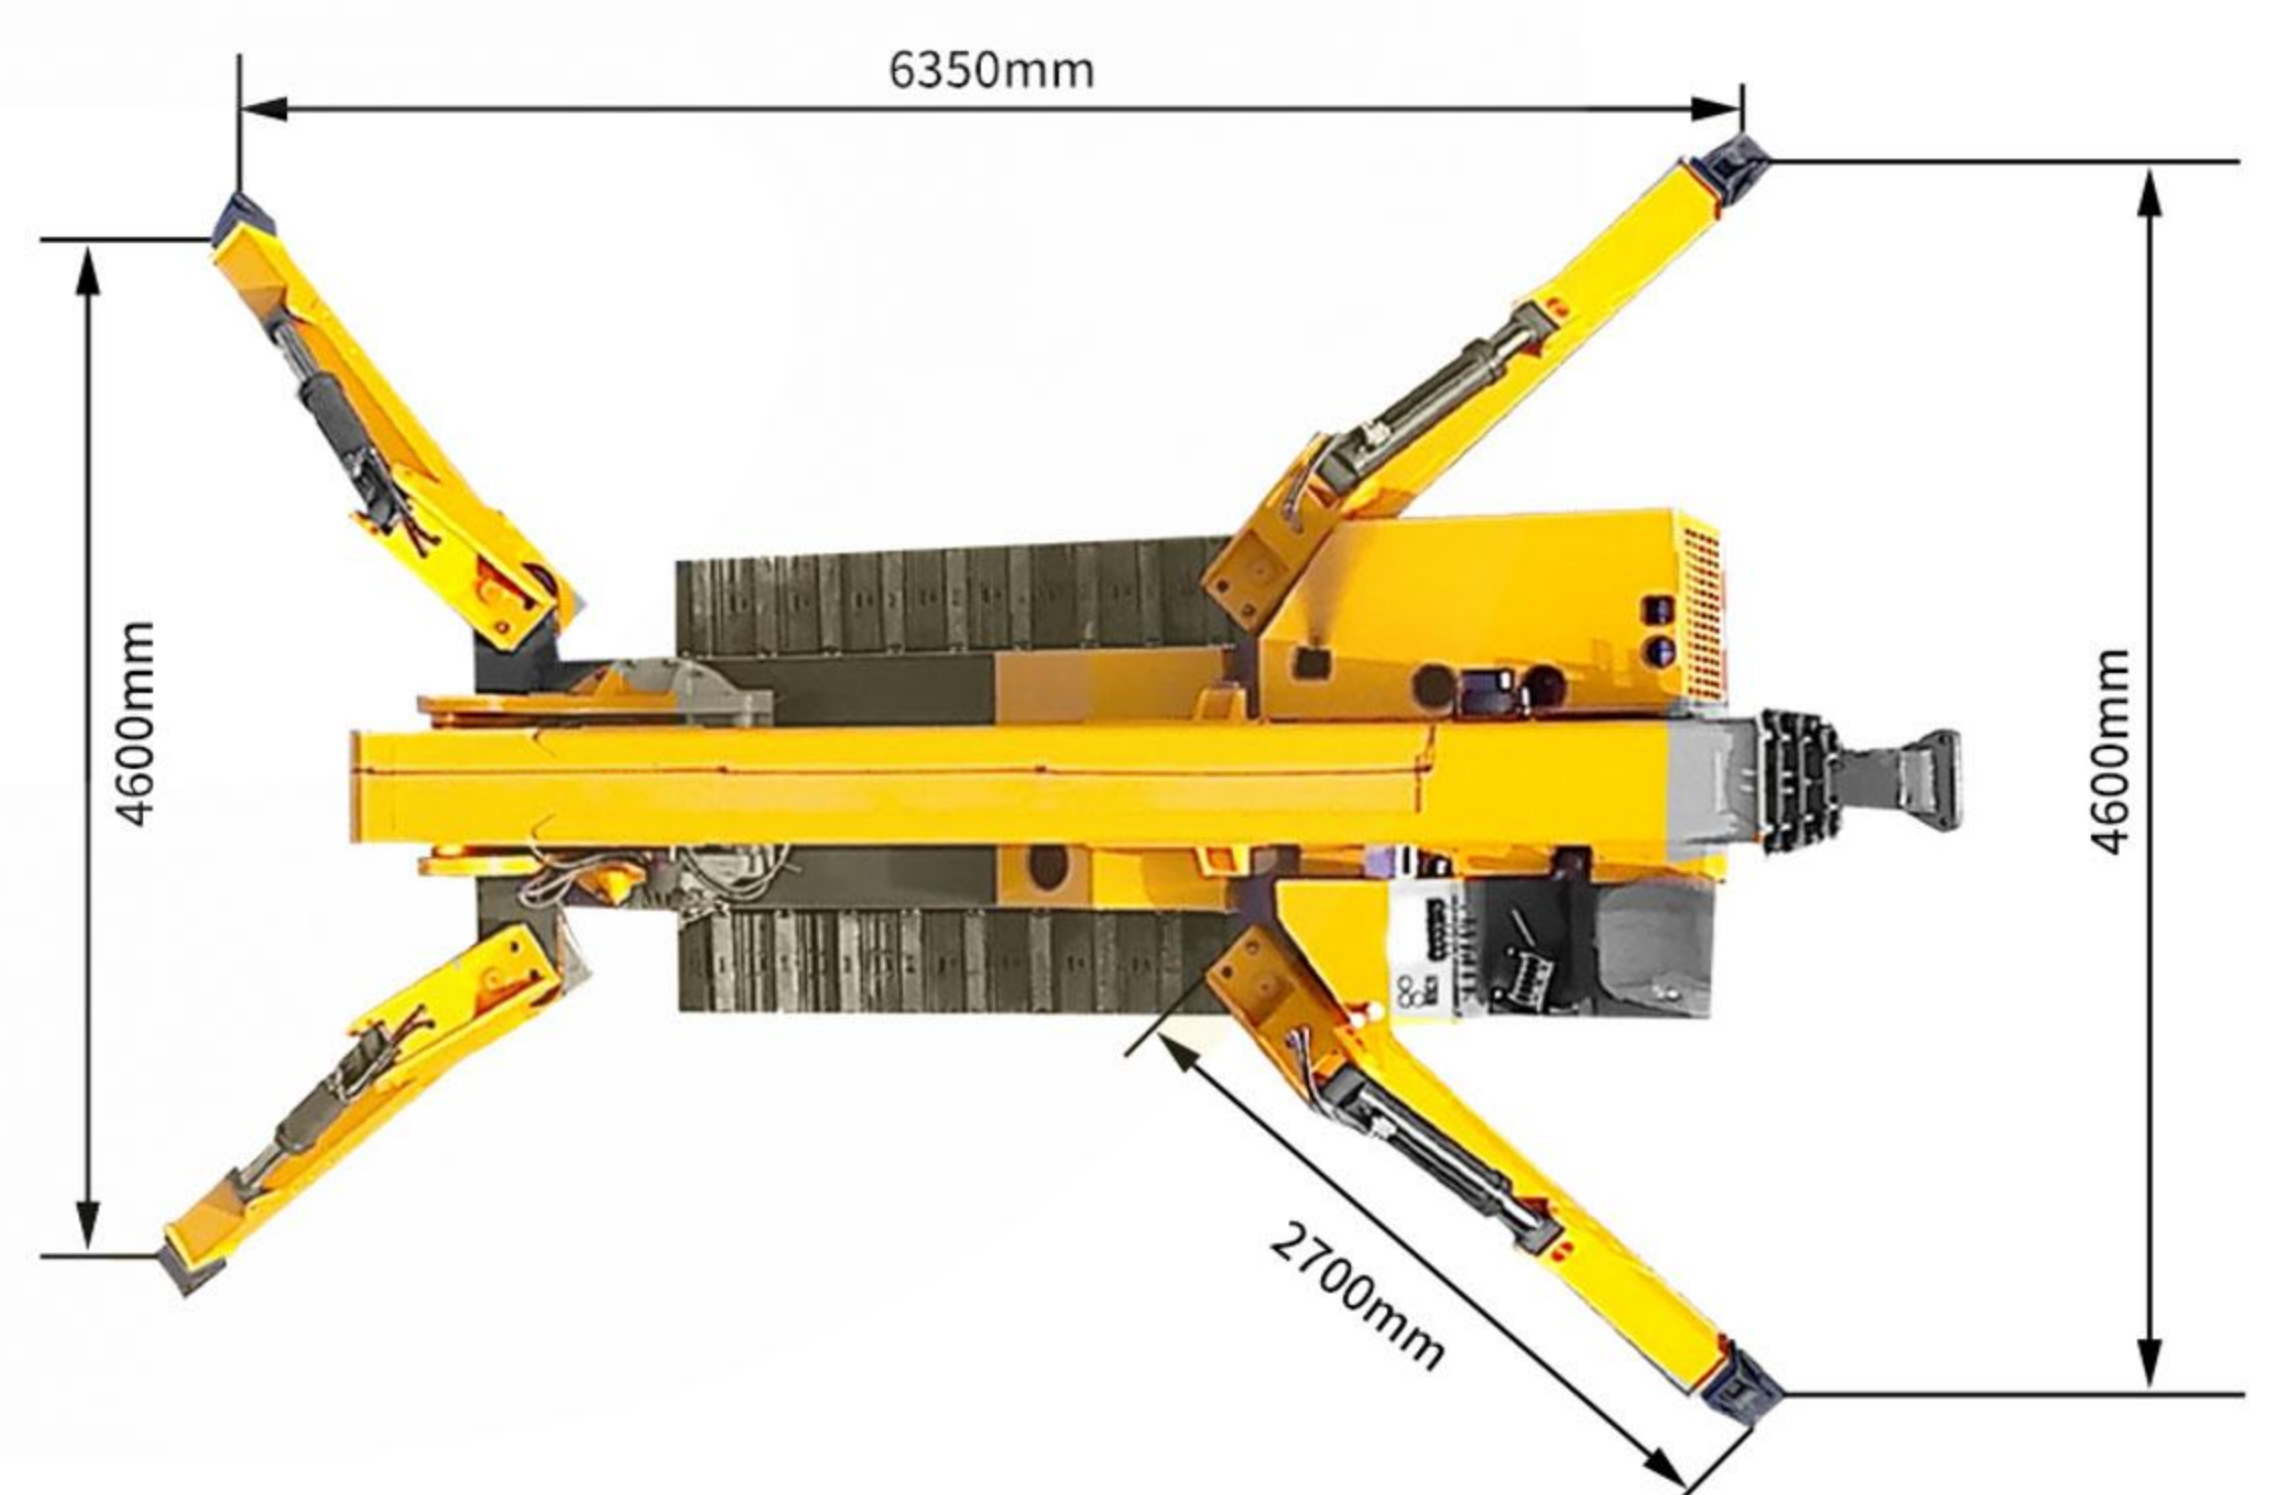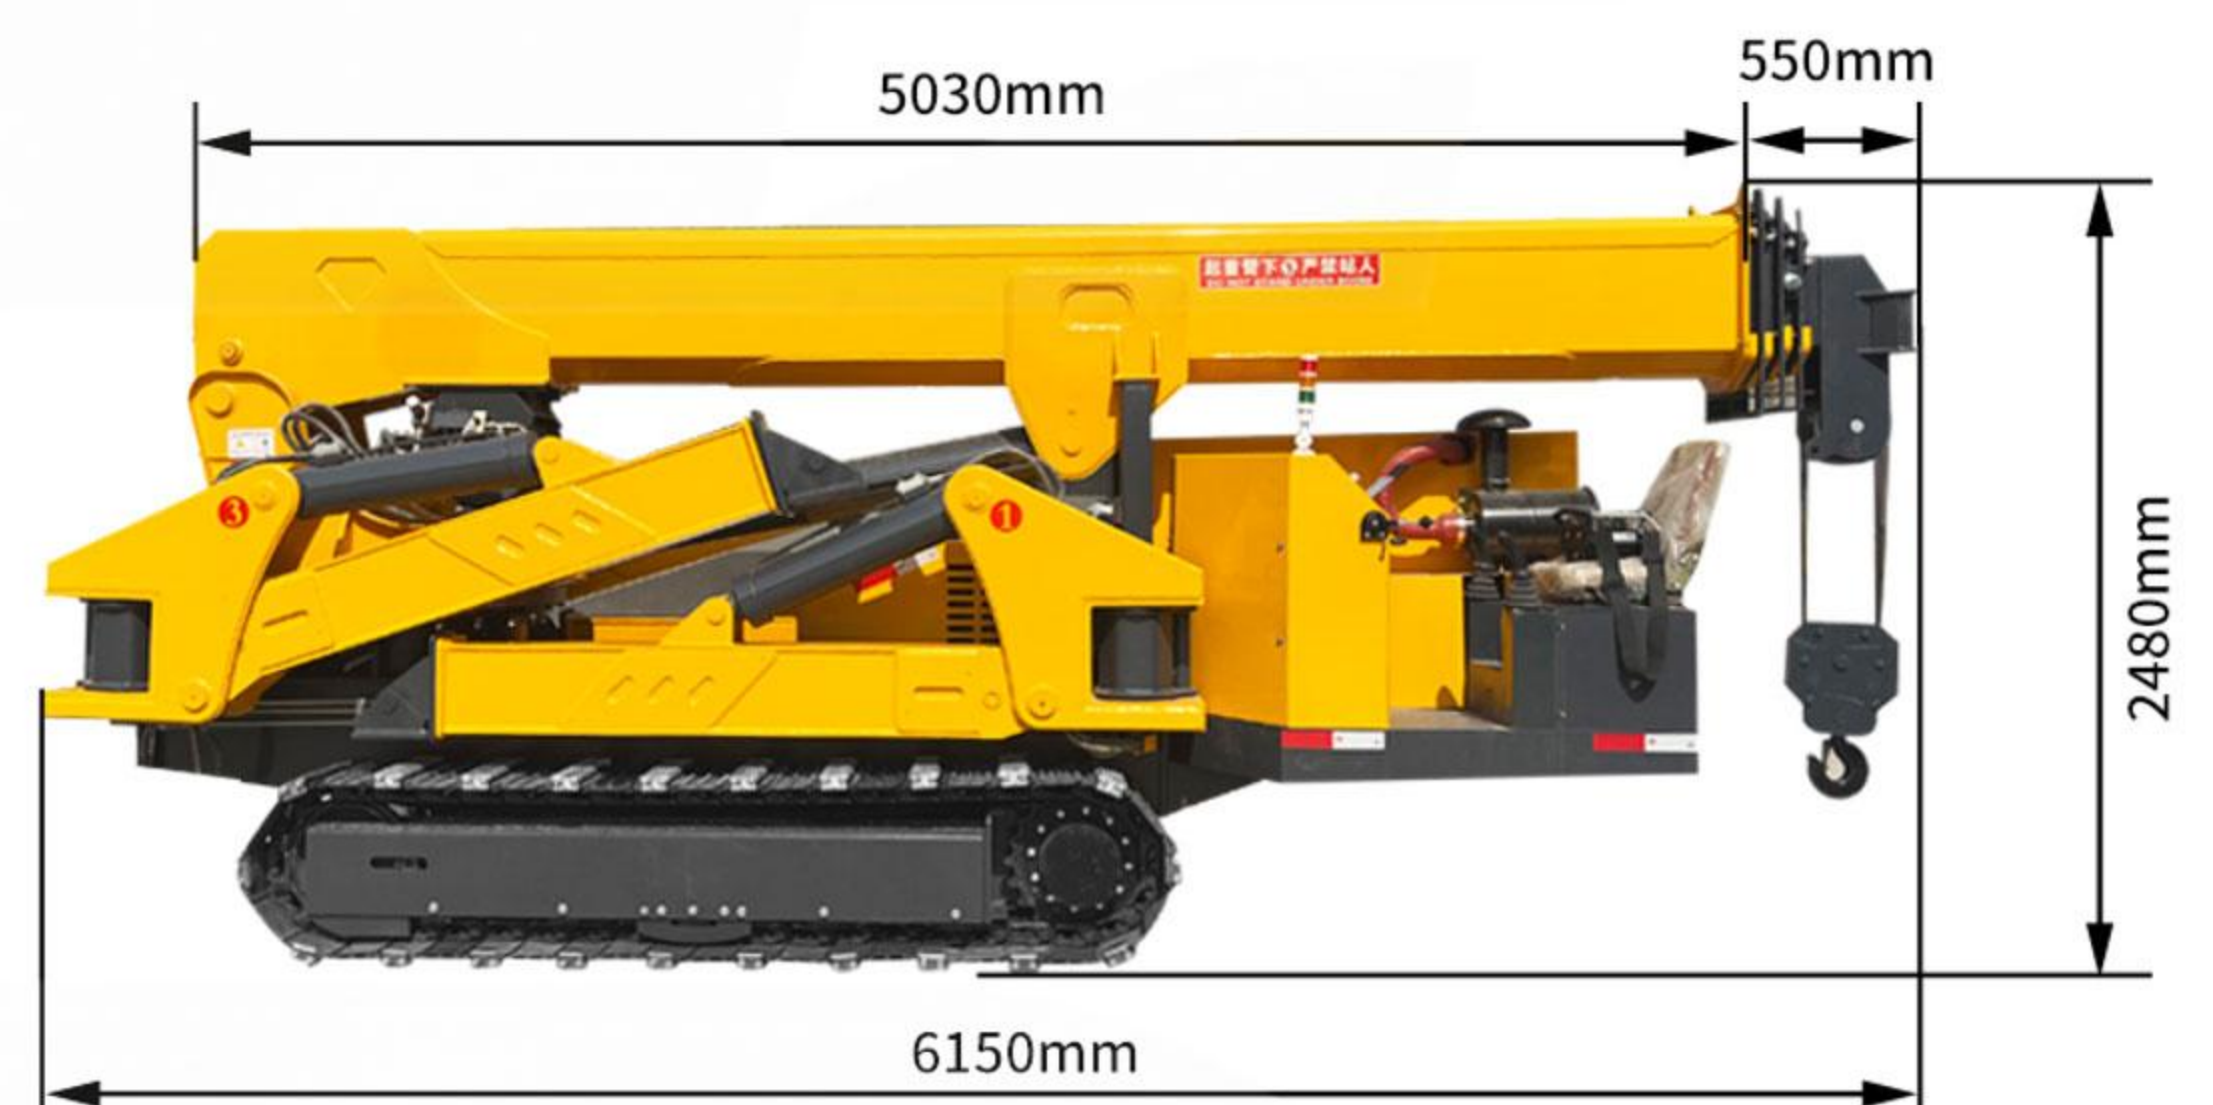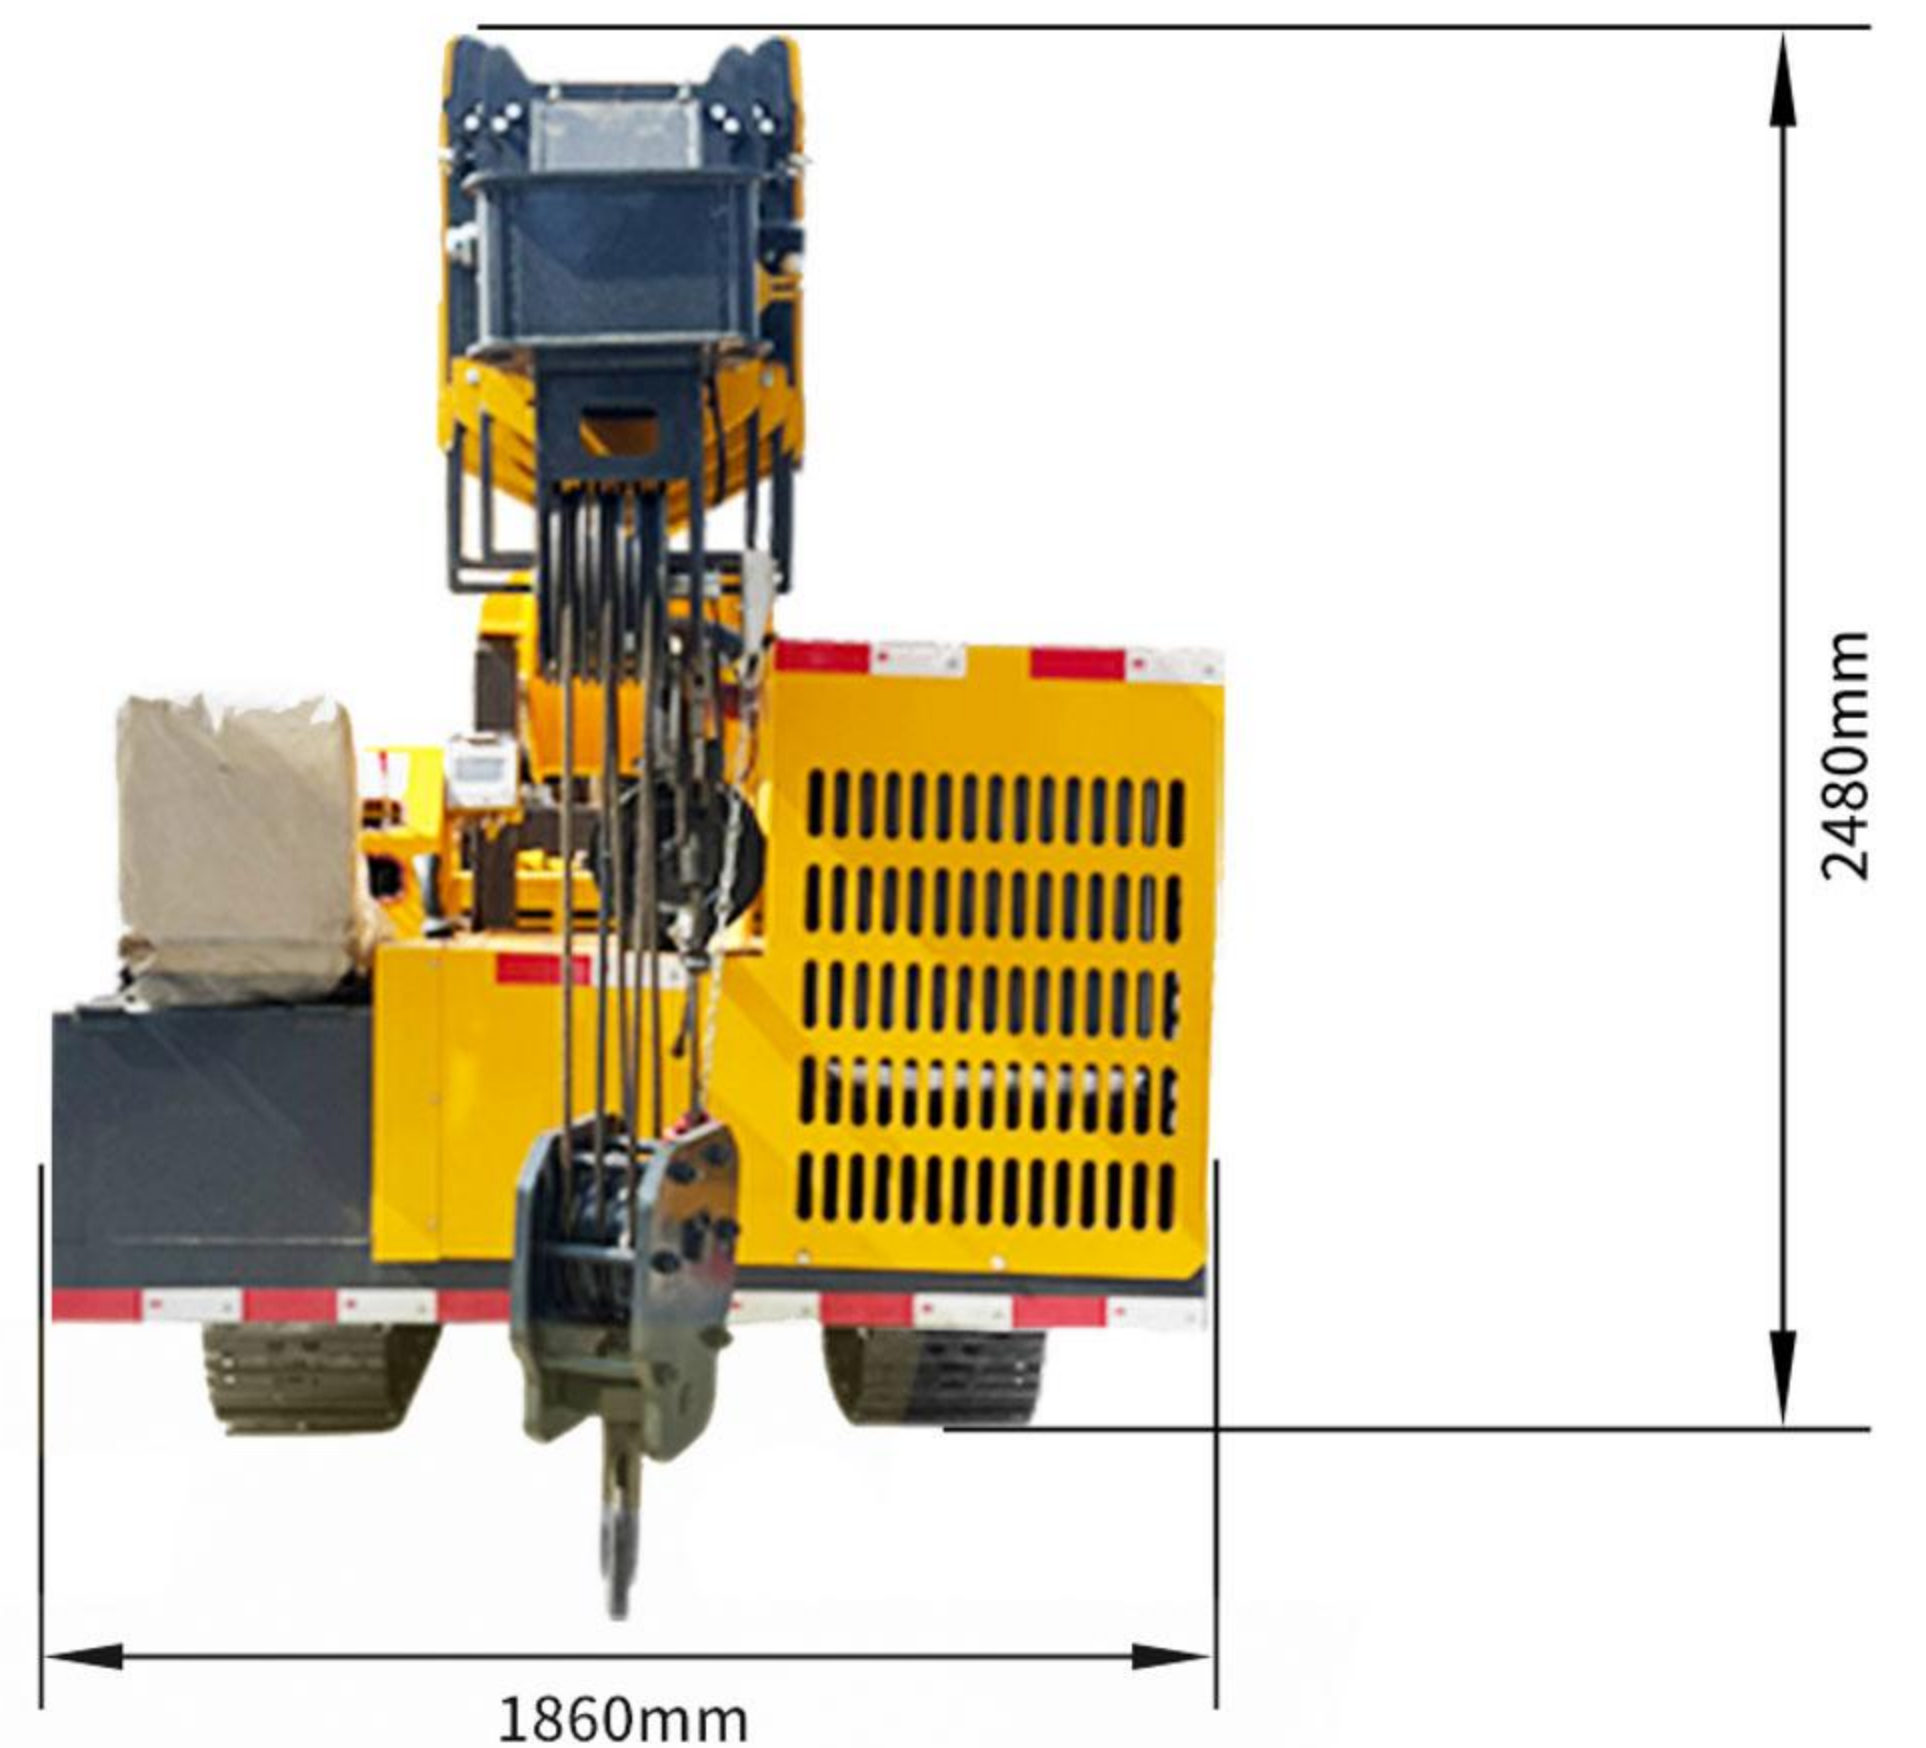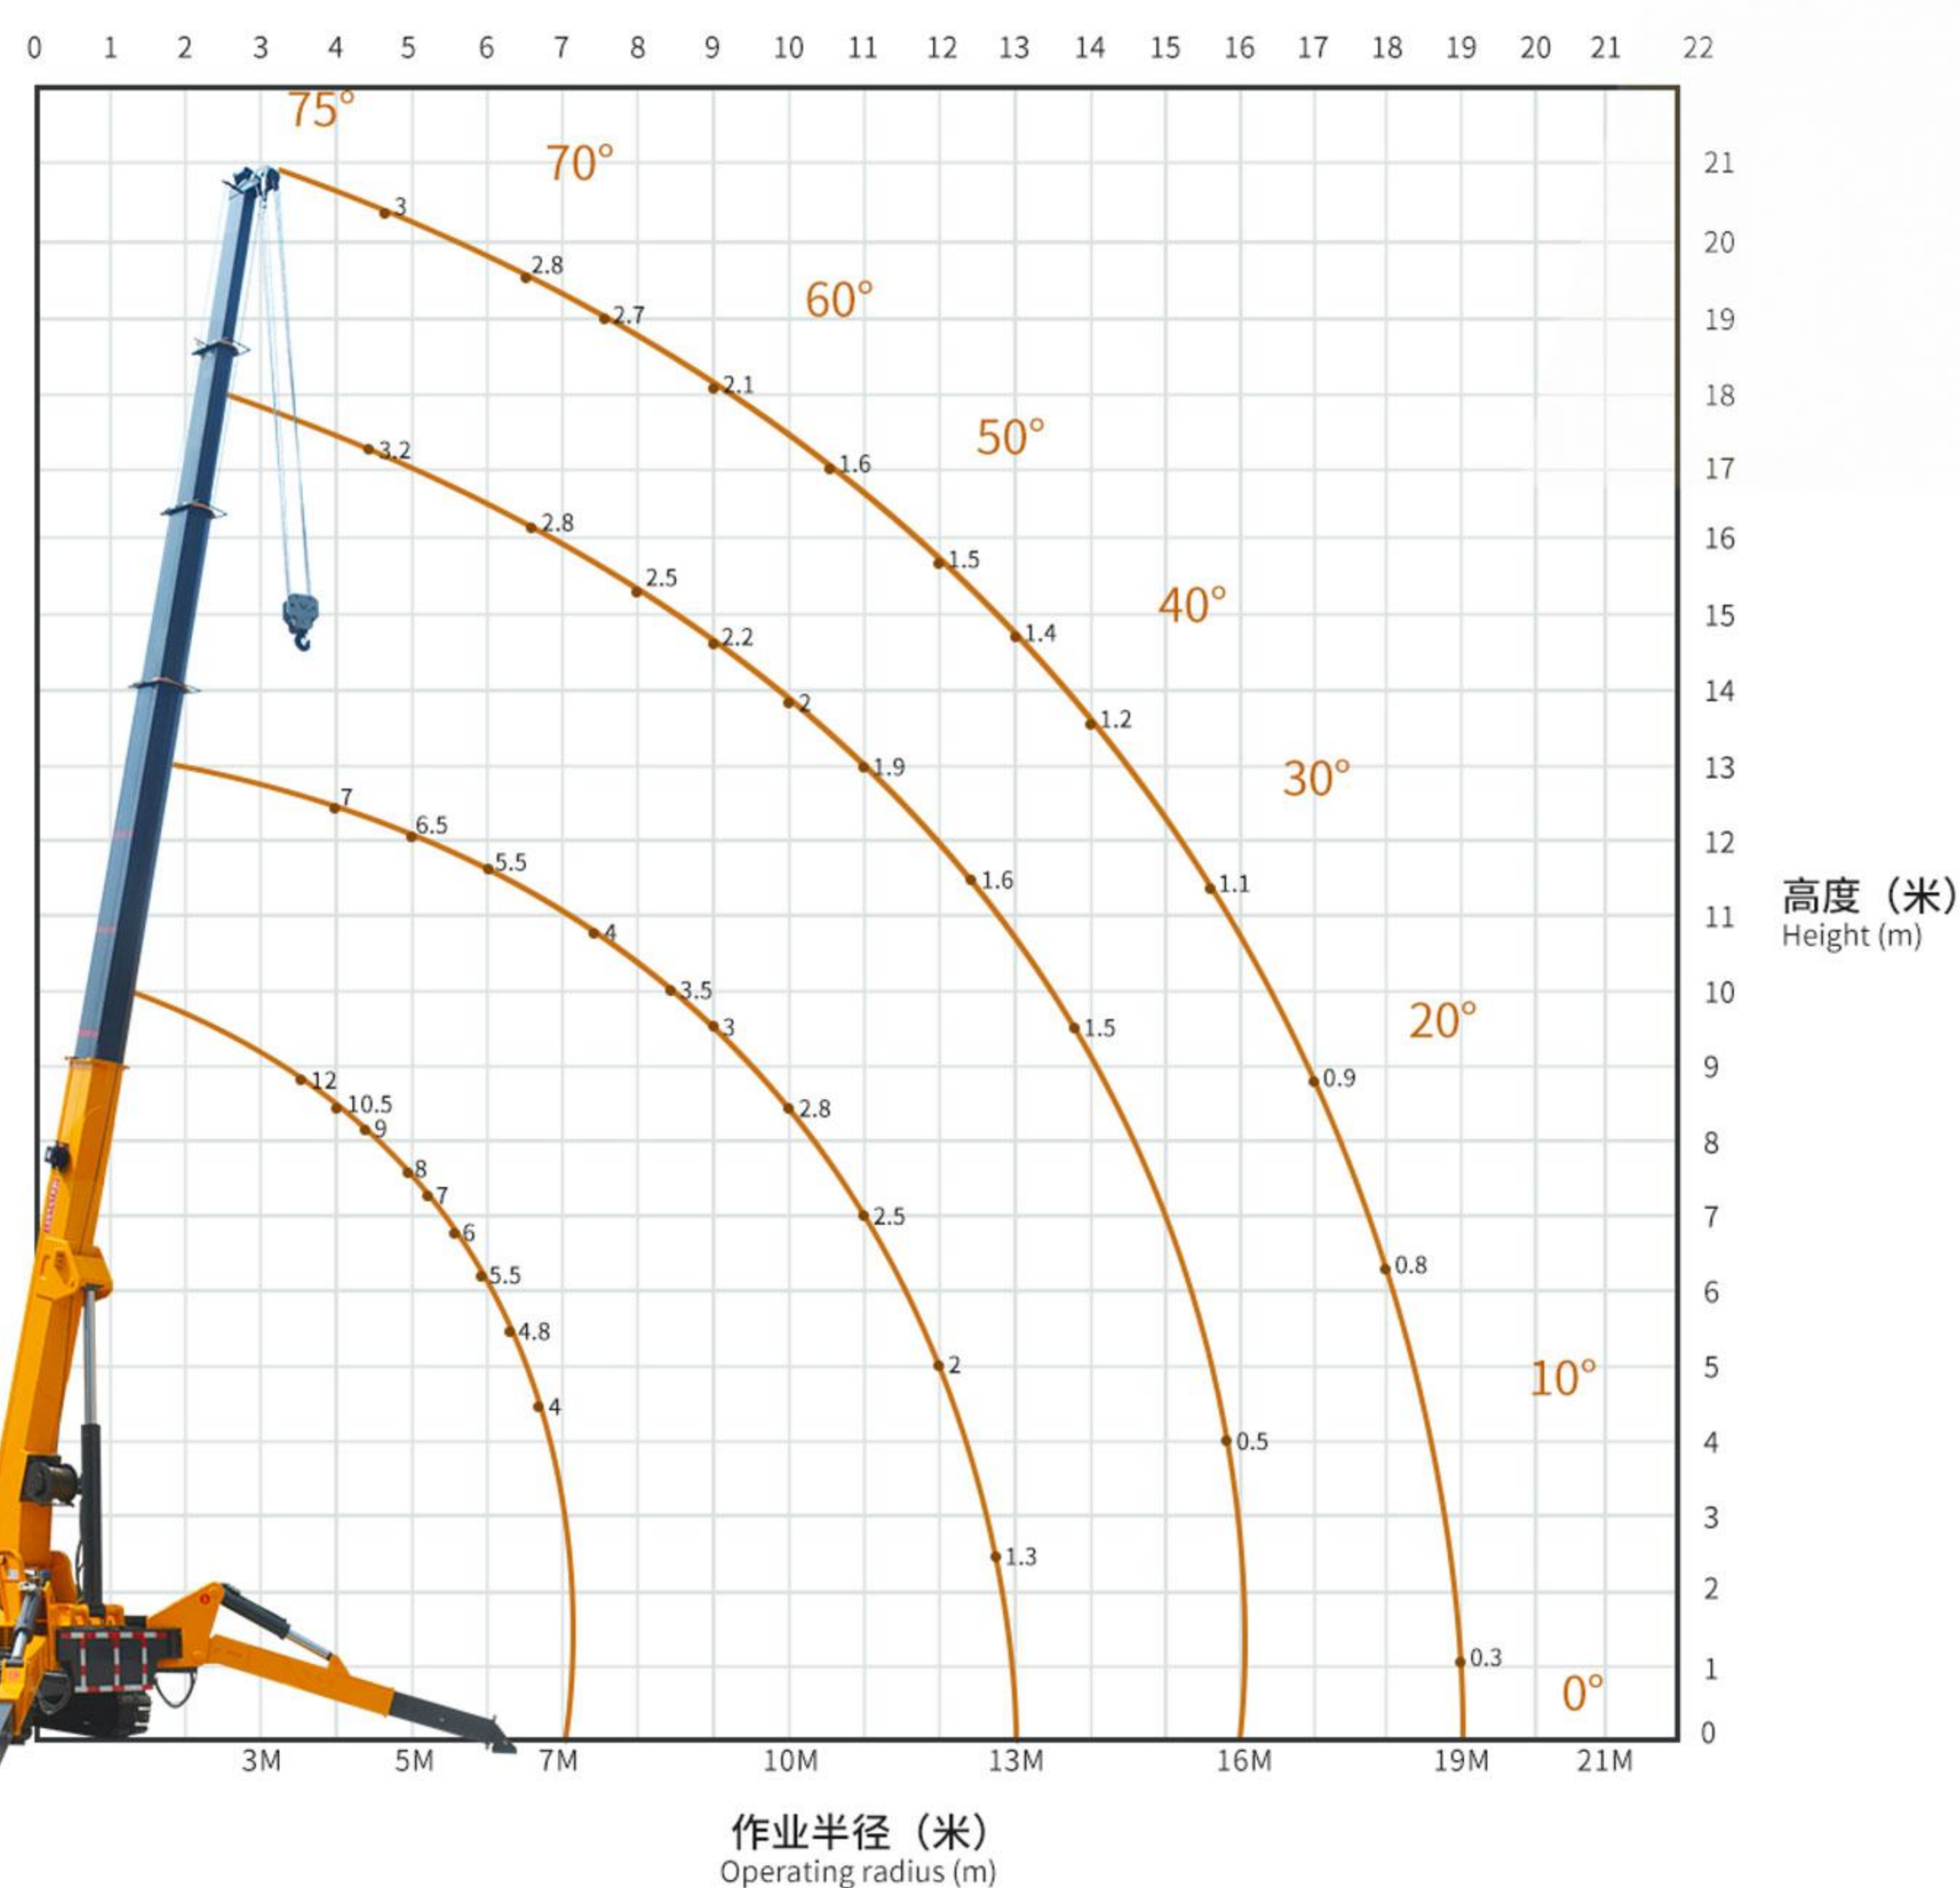

12吨蜘蛛吊机参数 12-ton Crawler Spider Crane

12T蜘蛛吊机 12T Spider Crane			
自重 (T) dead-weight (T)		12.5T	规格 Specifications
最大作业半径 Maximum operating radius		19m	最大地上扬程 Maximum ground lift
卷扬装置 Winch device	吊钩上升速度 Hook lifting speed	10m/min (4绳) 双速 10m/min (4 ropes) double speed	生产方 Manufacturer
	钢丝绳规格 Specification of steel wire rope	Φ12mm×120m	云内 (可定制) 76kw Yunnei(Support customization)76kw
	卷扬机规格 Hoist specifications	12T	排放标准 Emission standard
伸缩装置 Telescopic device	伸缩臂形式 Telescopic arm form	5m*5节吊臂 (可定制) 5m*5-section lifting arm (Support customization)	启动方式 start mode
	吊臂长/时间 Boom length/time	12.3m/60sec (可调节) 12.3m/60sec (adjustable)	启动性能 start performance
	伸缩臂长度 Telescopic arm length	5.5m-21m	燃料/容积 Fuel/Volume
支腿 Outrigger	支腿动作形式 Outrigger movement form	手动旋出+液压伸缩+液压支撑 Manual screw out + hydraulic telescopic + hydraulic support	电池容量 Battery capacity
	最大伸出幅度 (mm) Maximum extension amplitude (mm)	7600 (长) X5600 (后) X6700 (前) 7600(length) X 5600 (rear) X 6700 (front)	操作种类 (吊臂/支腿) 手动行走 Operation type (boom/leg), manual walking
行走装置 running gear	行走方式 Walking mode	液压驱动 hydraulic drive	操作系统 operating system
	行走速度 Walking speed	0-2.5km/h	变幅装置 Luffing device
	爬坡能力 Gradeability	25°(36%)	回旋装置 gyroscope
	履带结构 Track structure	钢制履带 Steel track	吊臂角度/时间 Boom angle/time
可选装 Optional		可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black	
		回转角度/速度 Rotation angle/speed	
		整车尺寸 Vehicle Size	
		履带 (mm) Track (mm)	

12T蜘蛛吊润滑部位图

12T spider crane lubrication parts diagram

注:转盘、大臂须定时**保养**(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / "Whenever the jibs are out, grease the jibs."

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物质齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.
本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)




无线遥控器
wireless remote






16吨蜘蛛吊机 16-ton spider crane

● 性能特点 Performance Characteristics

- 钢制履带底盘，对地面无损伤，适应各种地面
- 吊臂采用高强锰钢材质，吊重能力更强
- 机身紧凑,占用空间小。适用范围广泛
- 安全设计 可防止错误操作
- 可加遥控装置 操作便捷
- Steel tracked chassis, no damage to the ground, adaptable to a variety of surfaces
- The boom is made of high-strength manganese steel for better lifting capacity.
- The body of the machine is compact and takes up little space. Wide range of application
- Safe design prevents incorrect operation
- Remote control can be added for easy operation

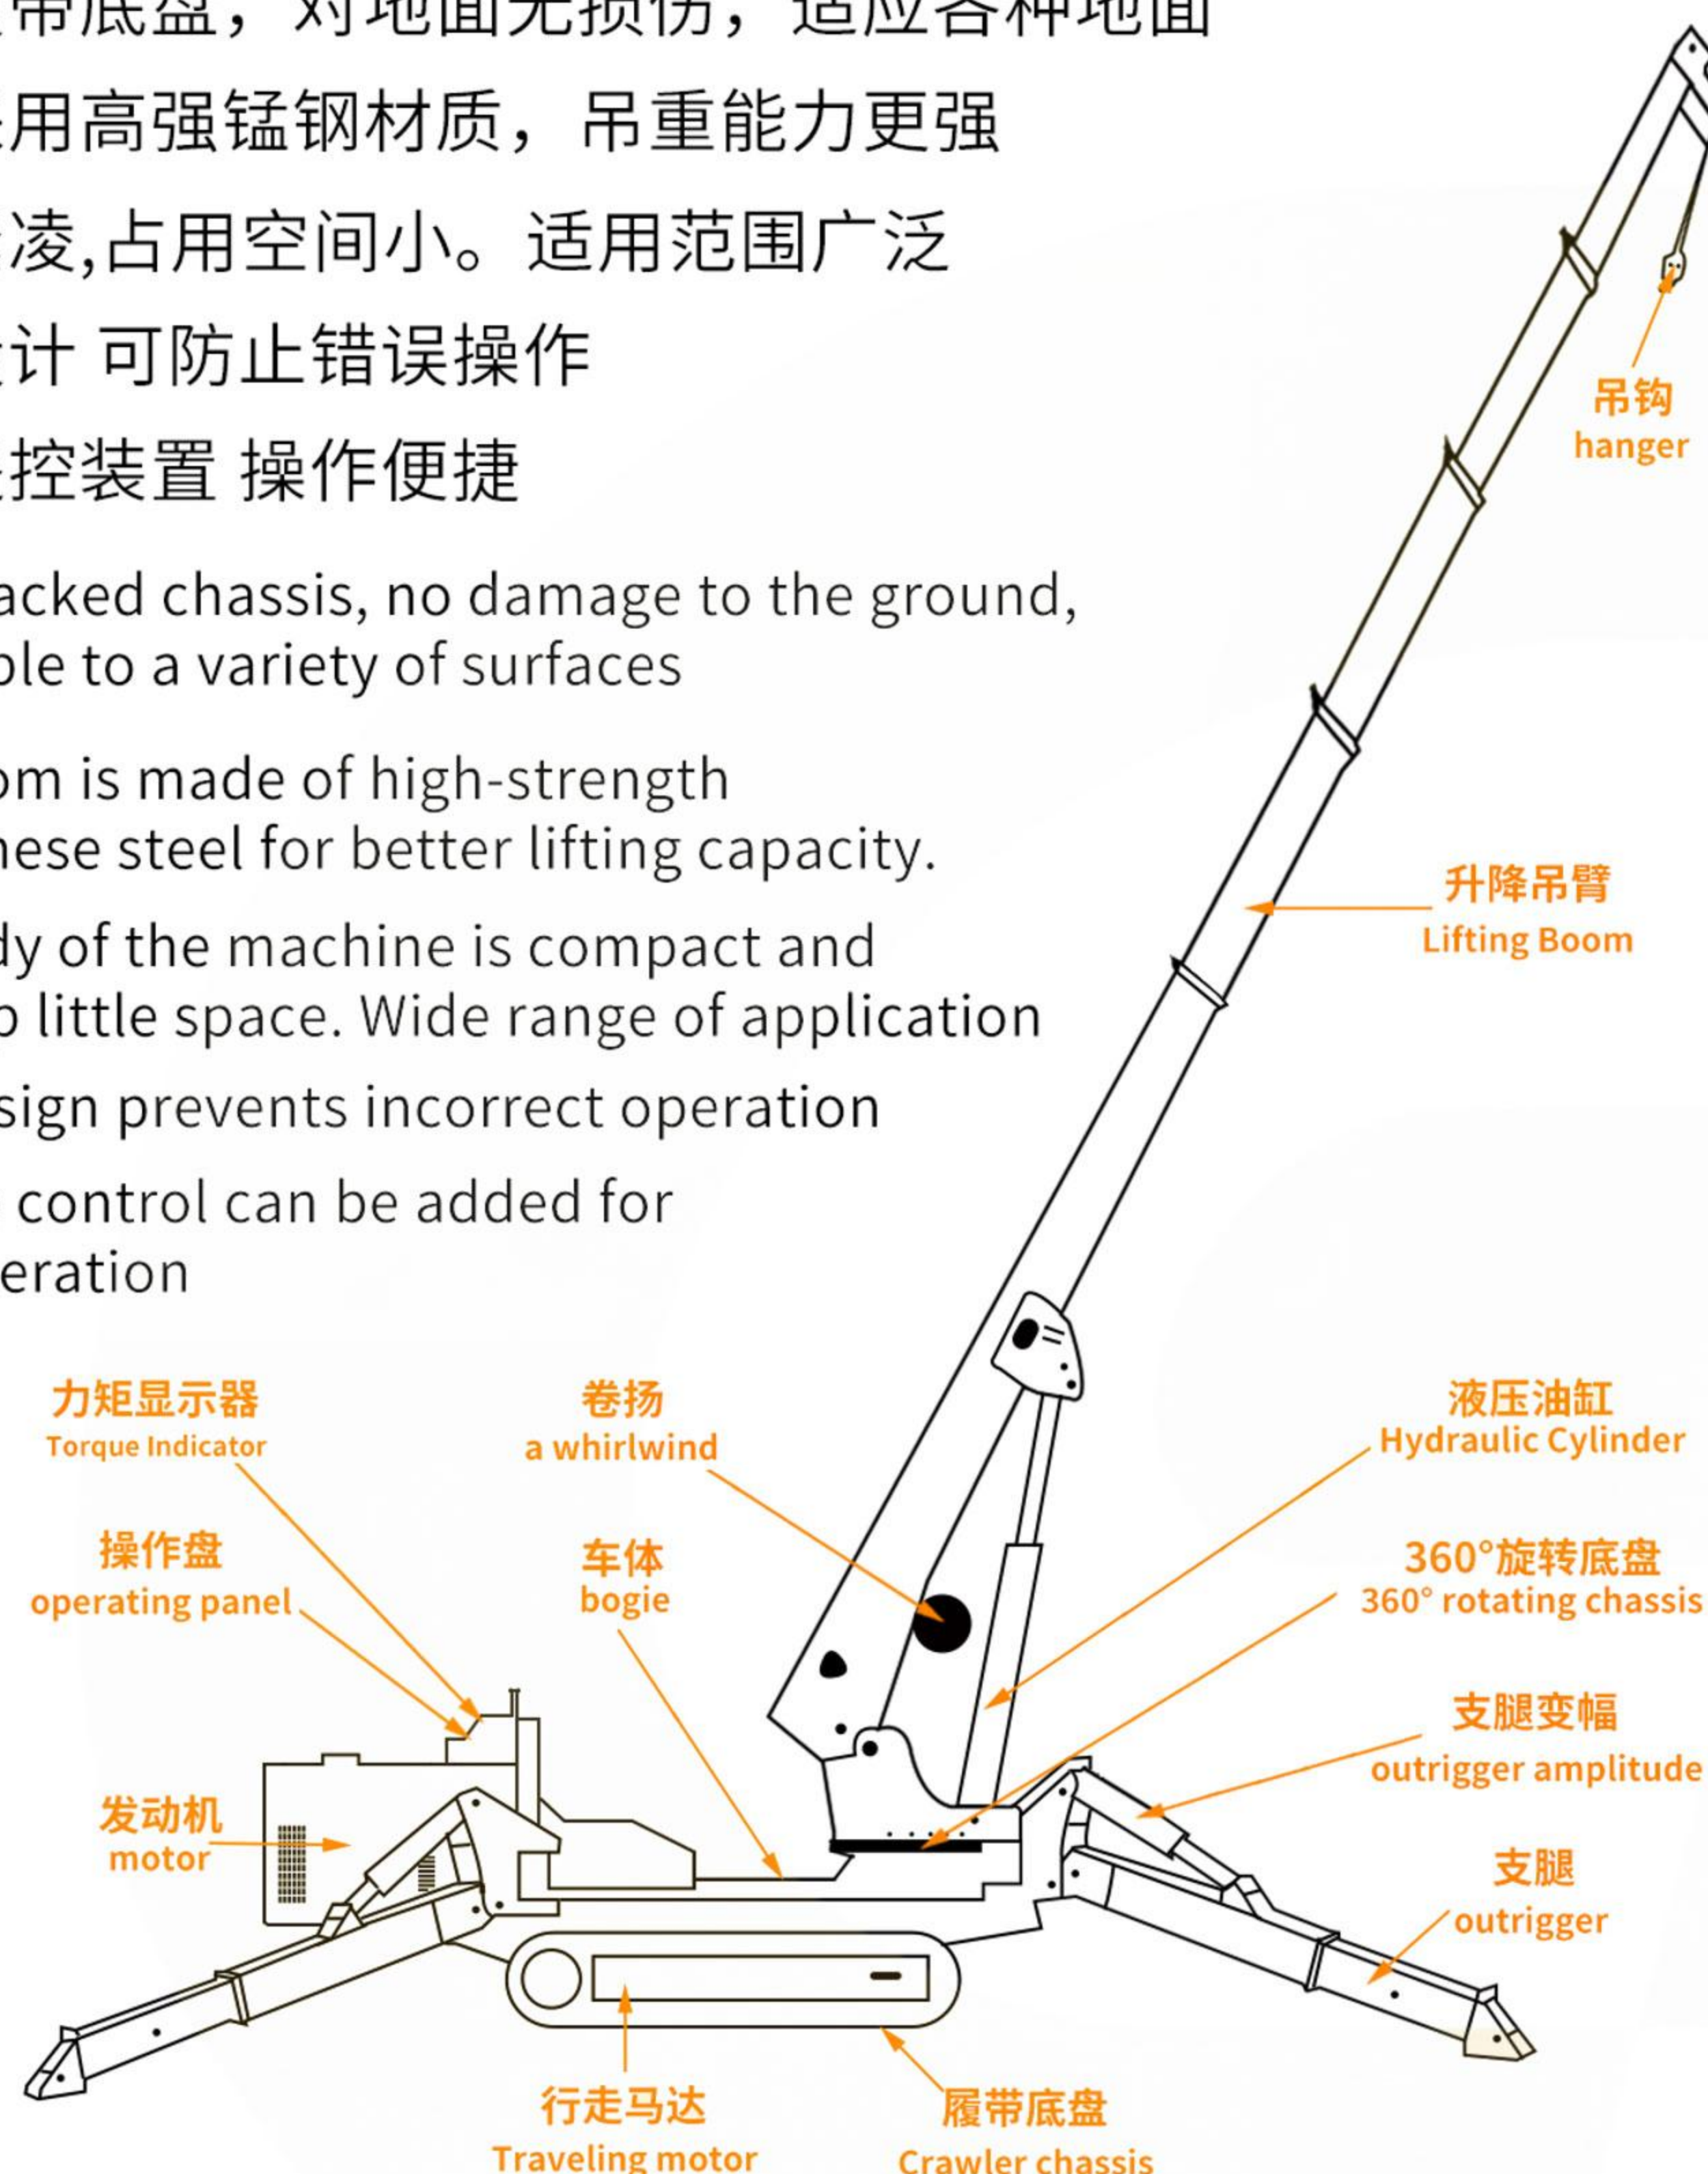

16吨蜘蛛吊机吊重表
16 ton spider crane lifting weight chart

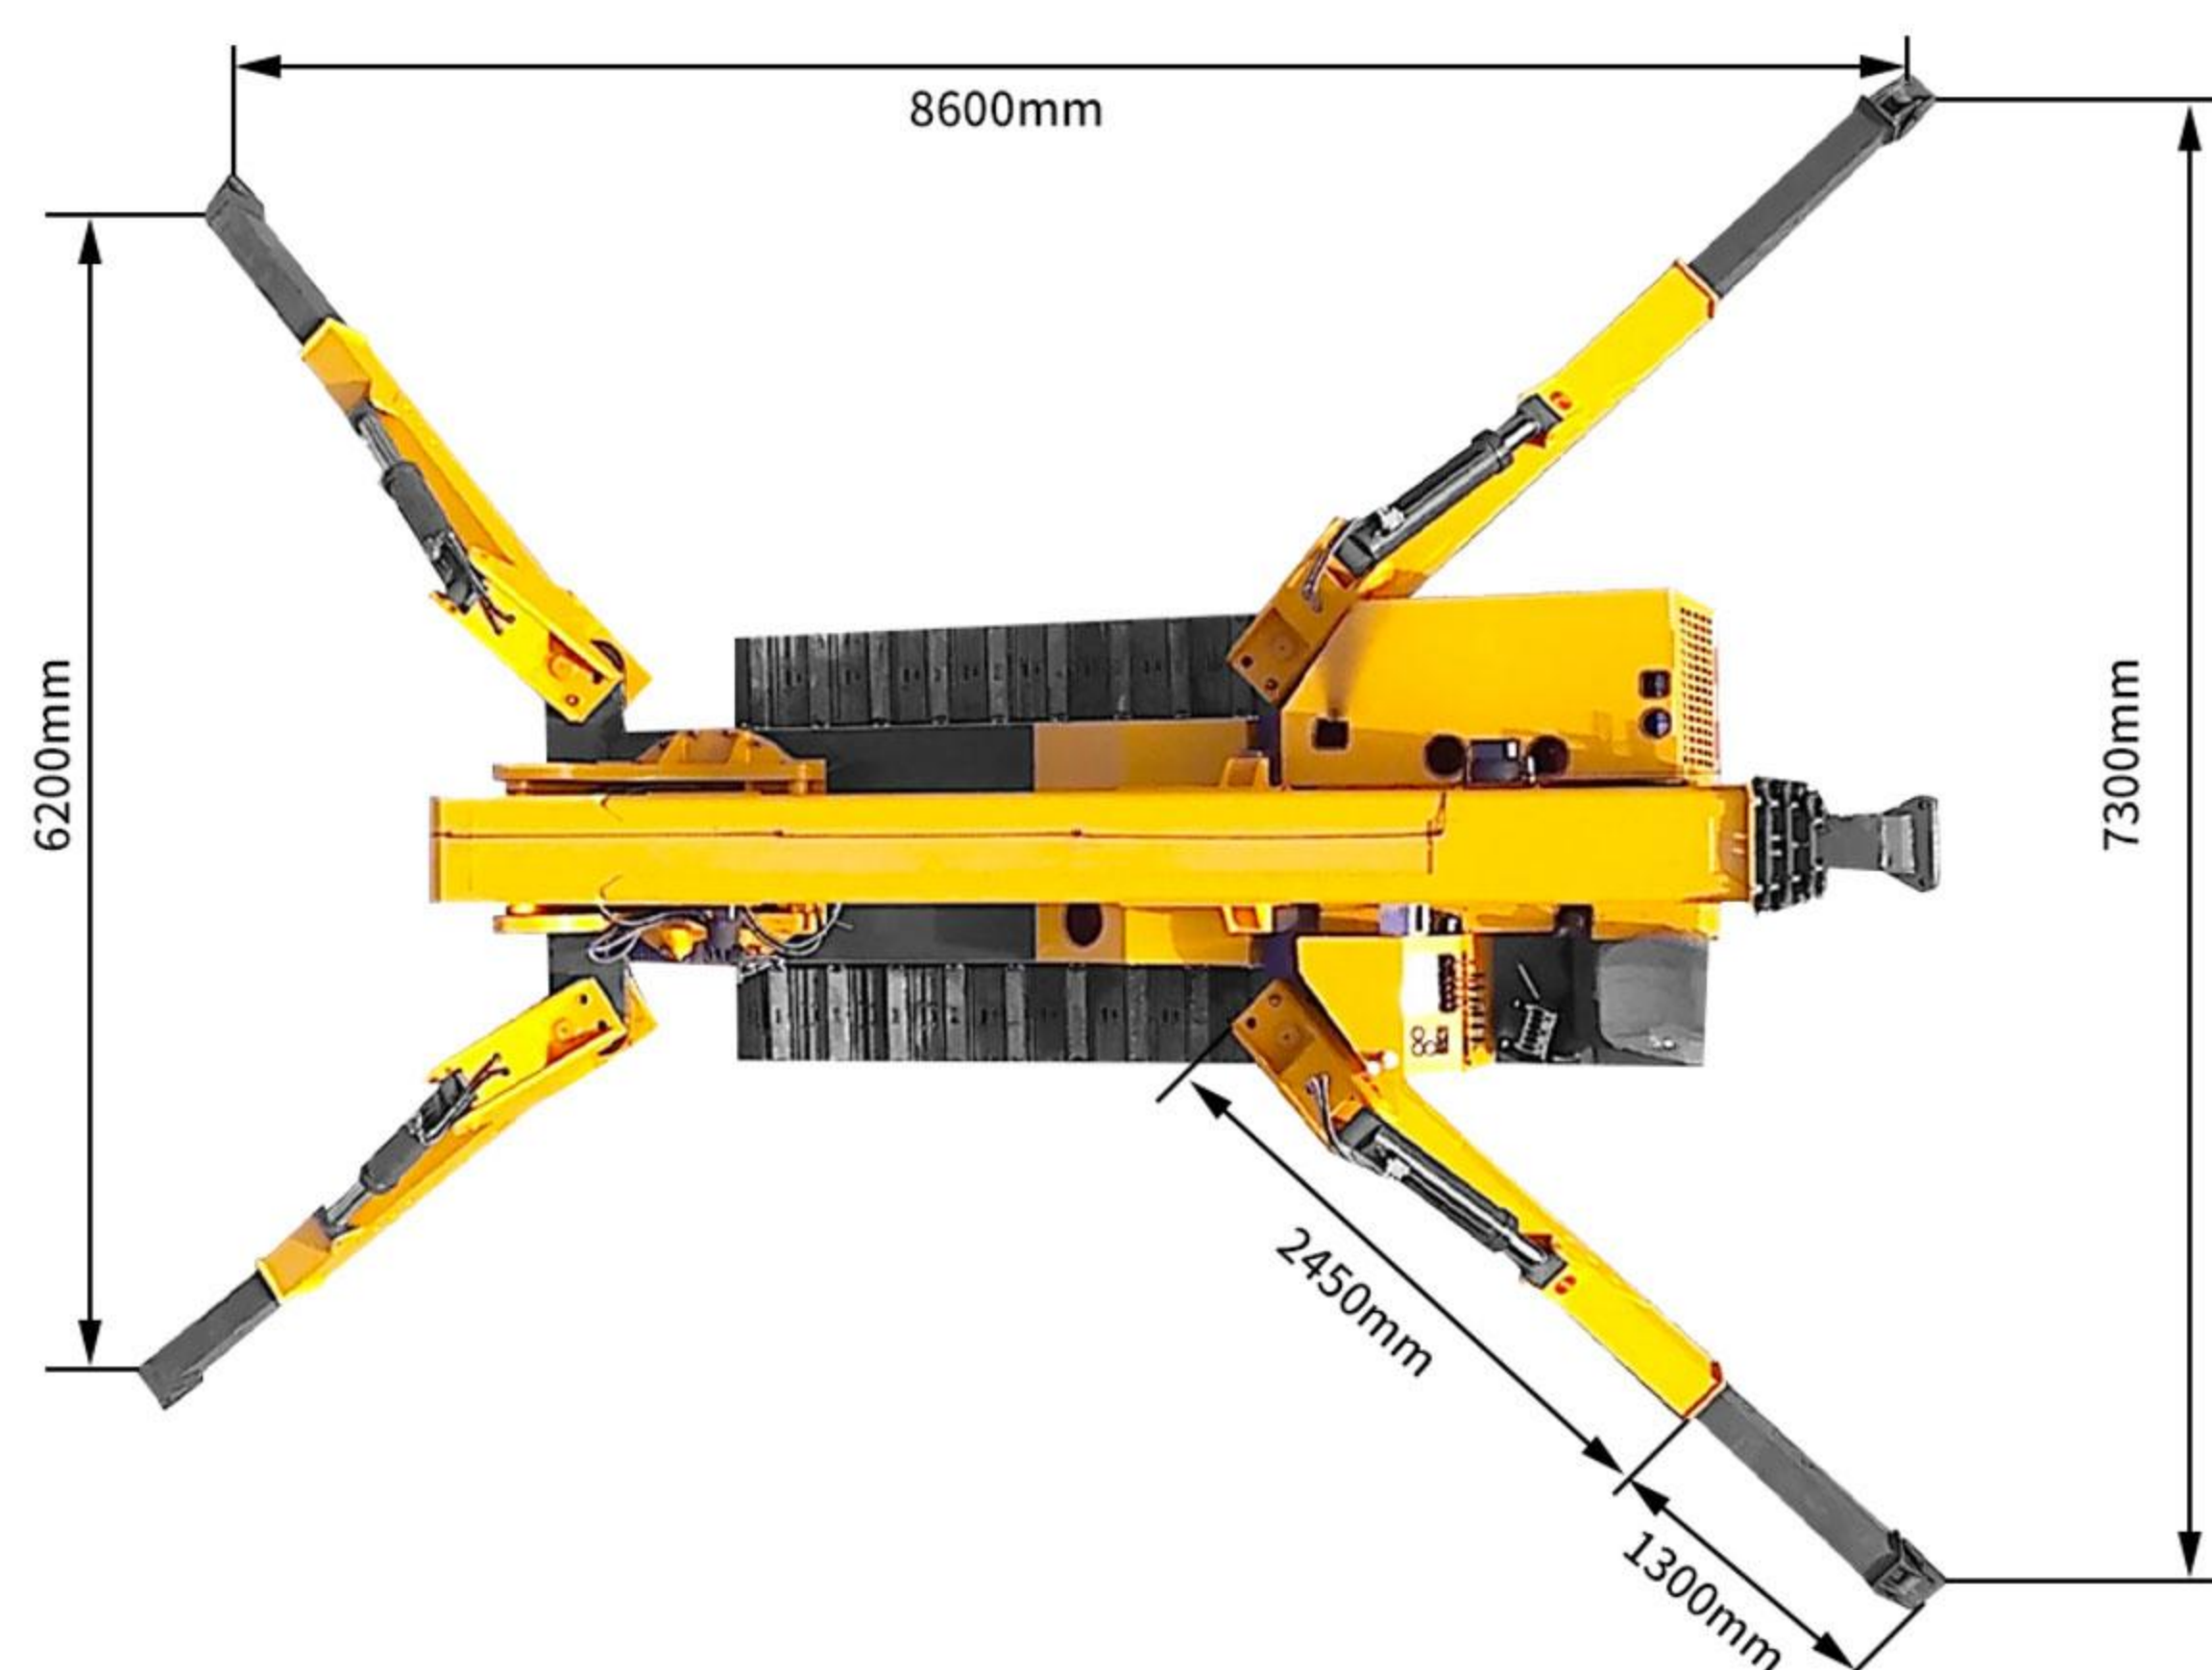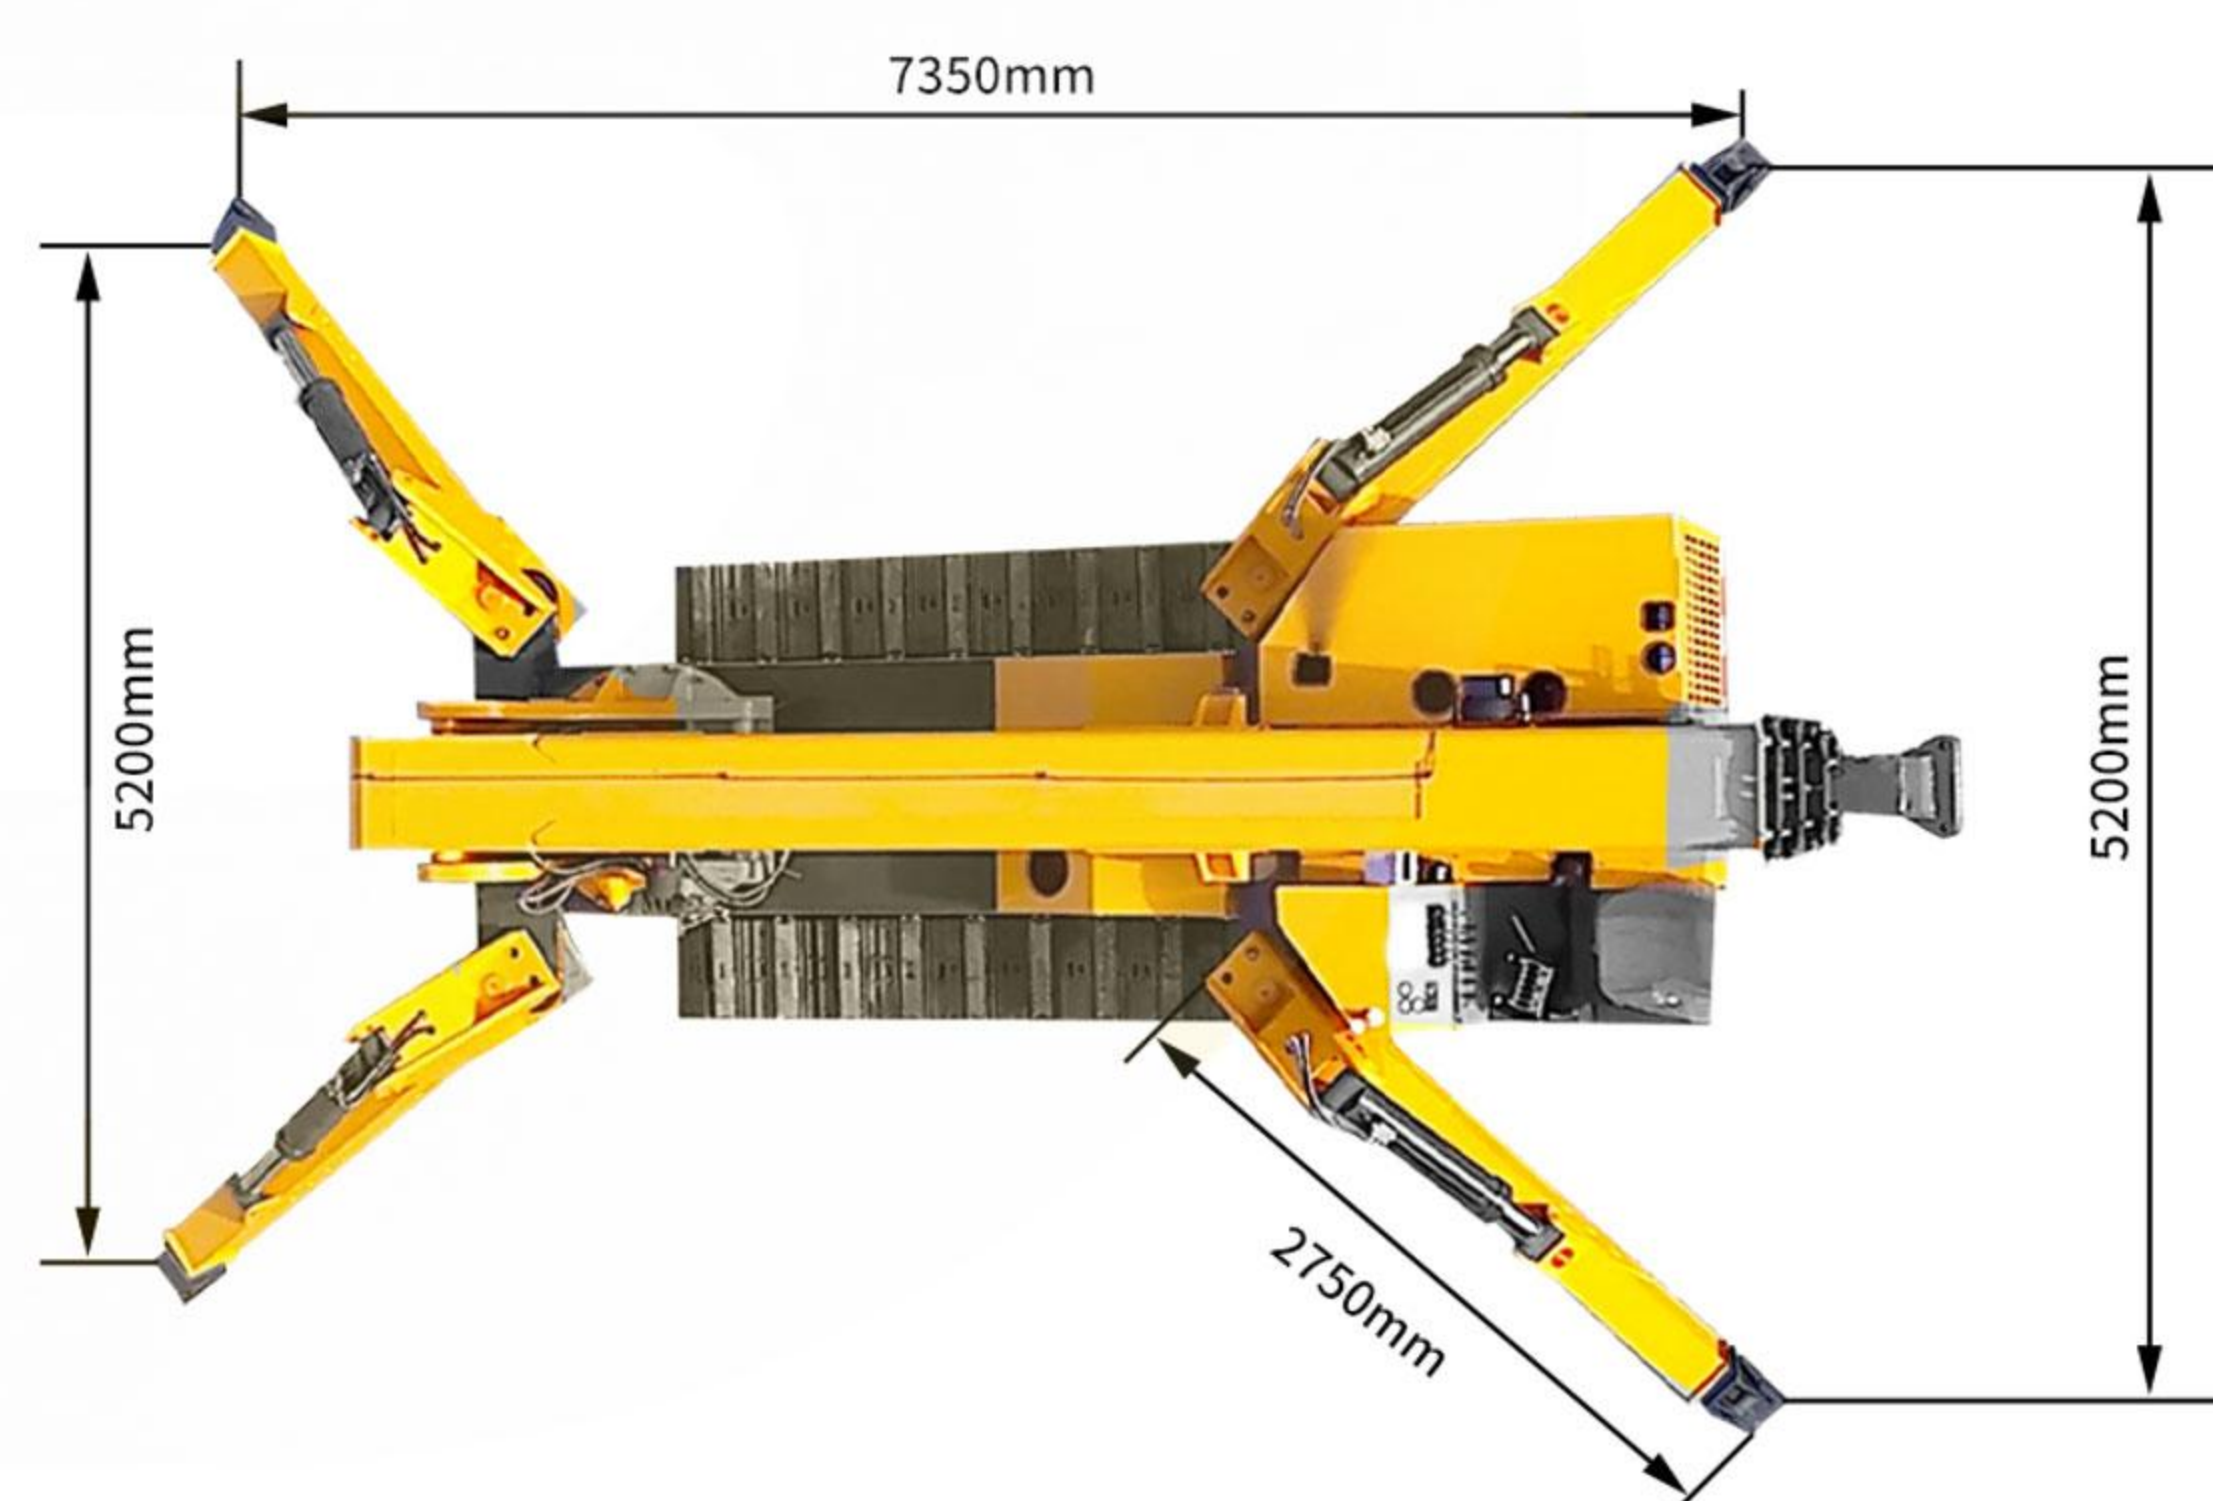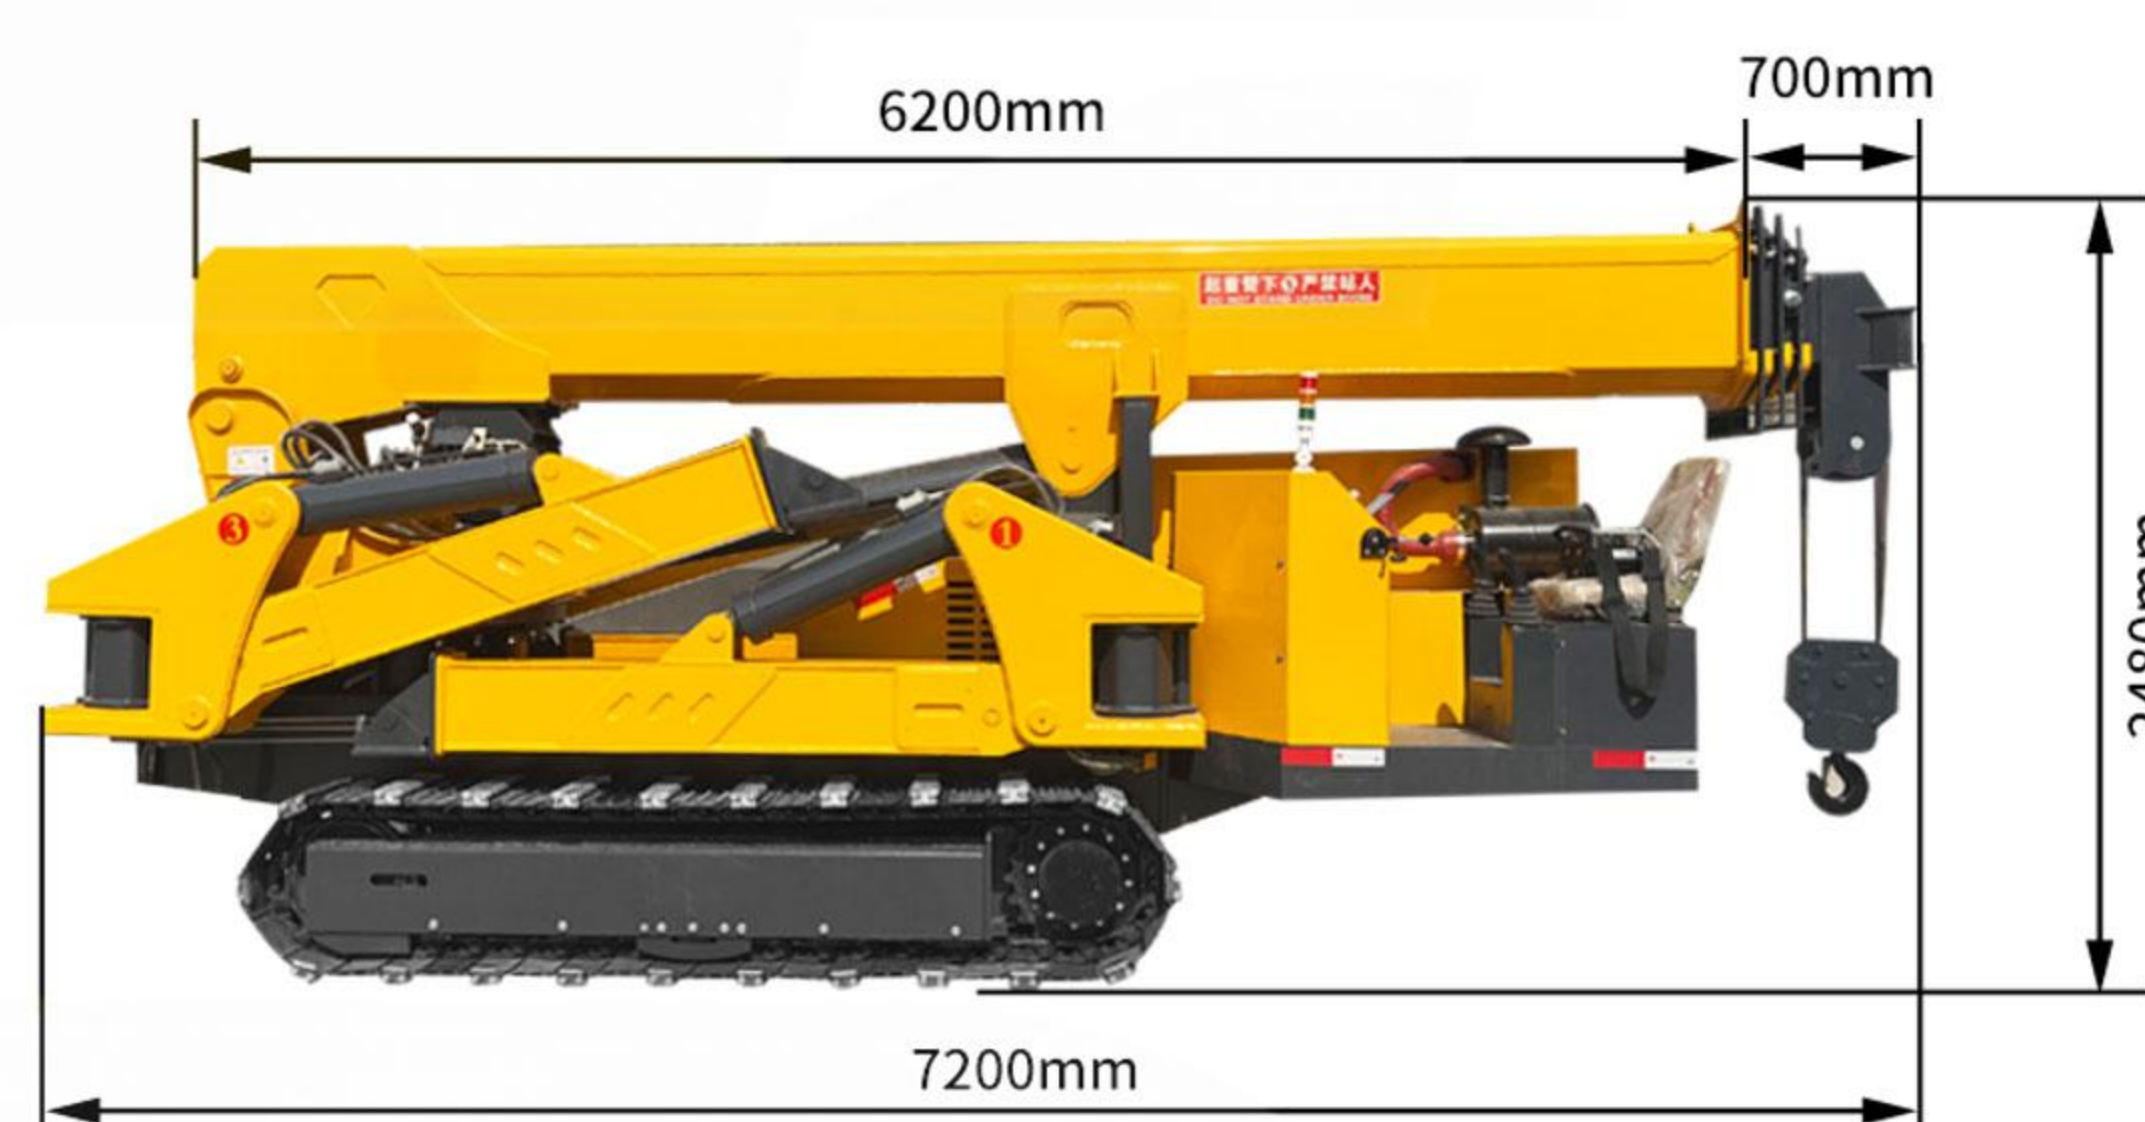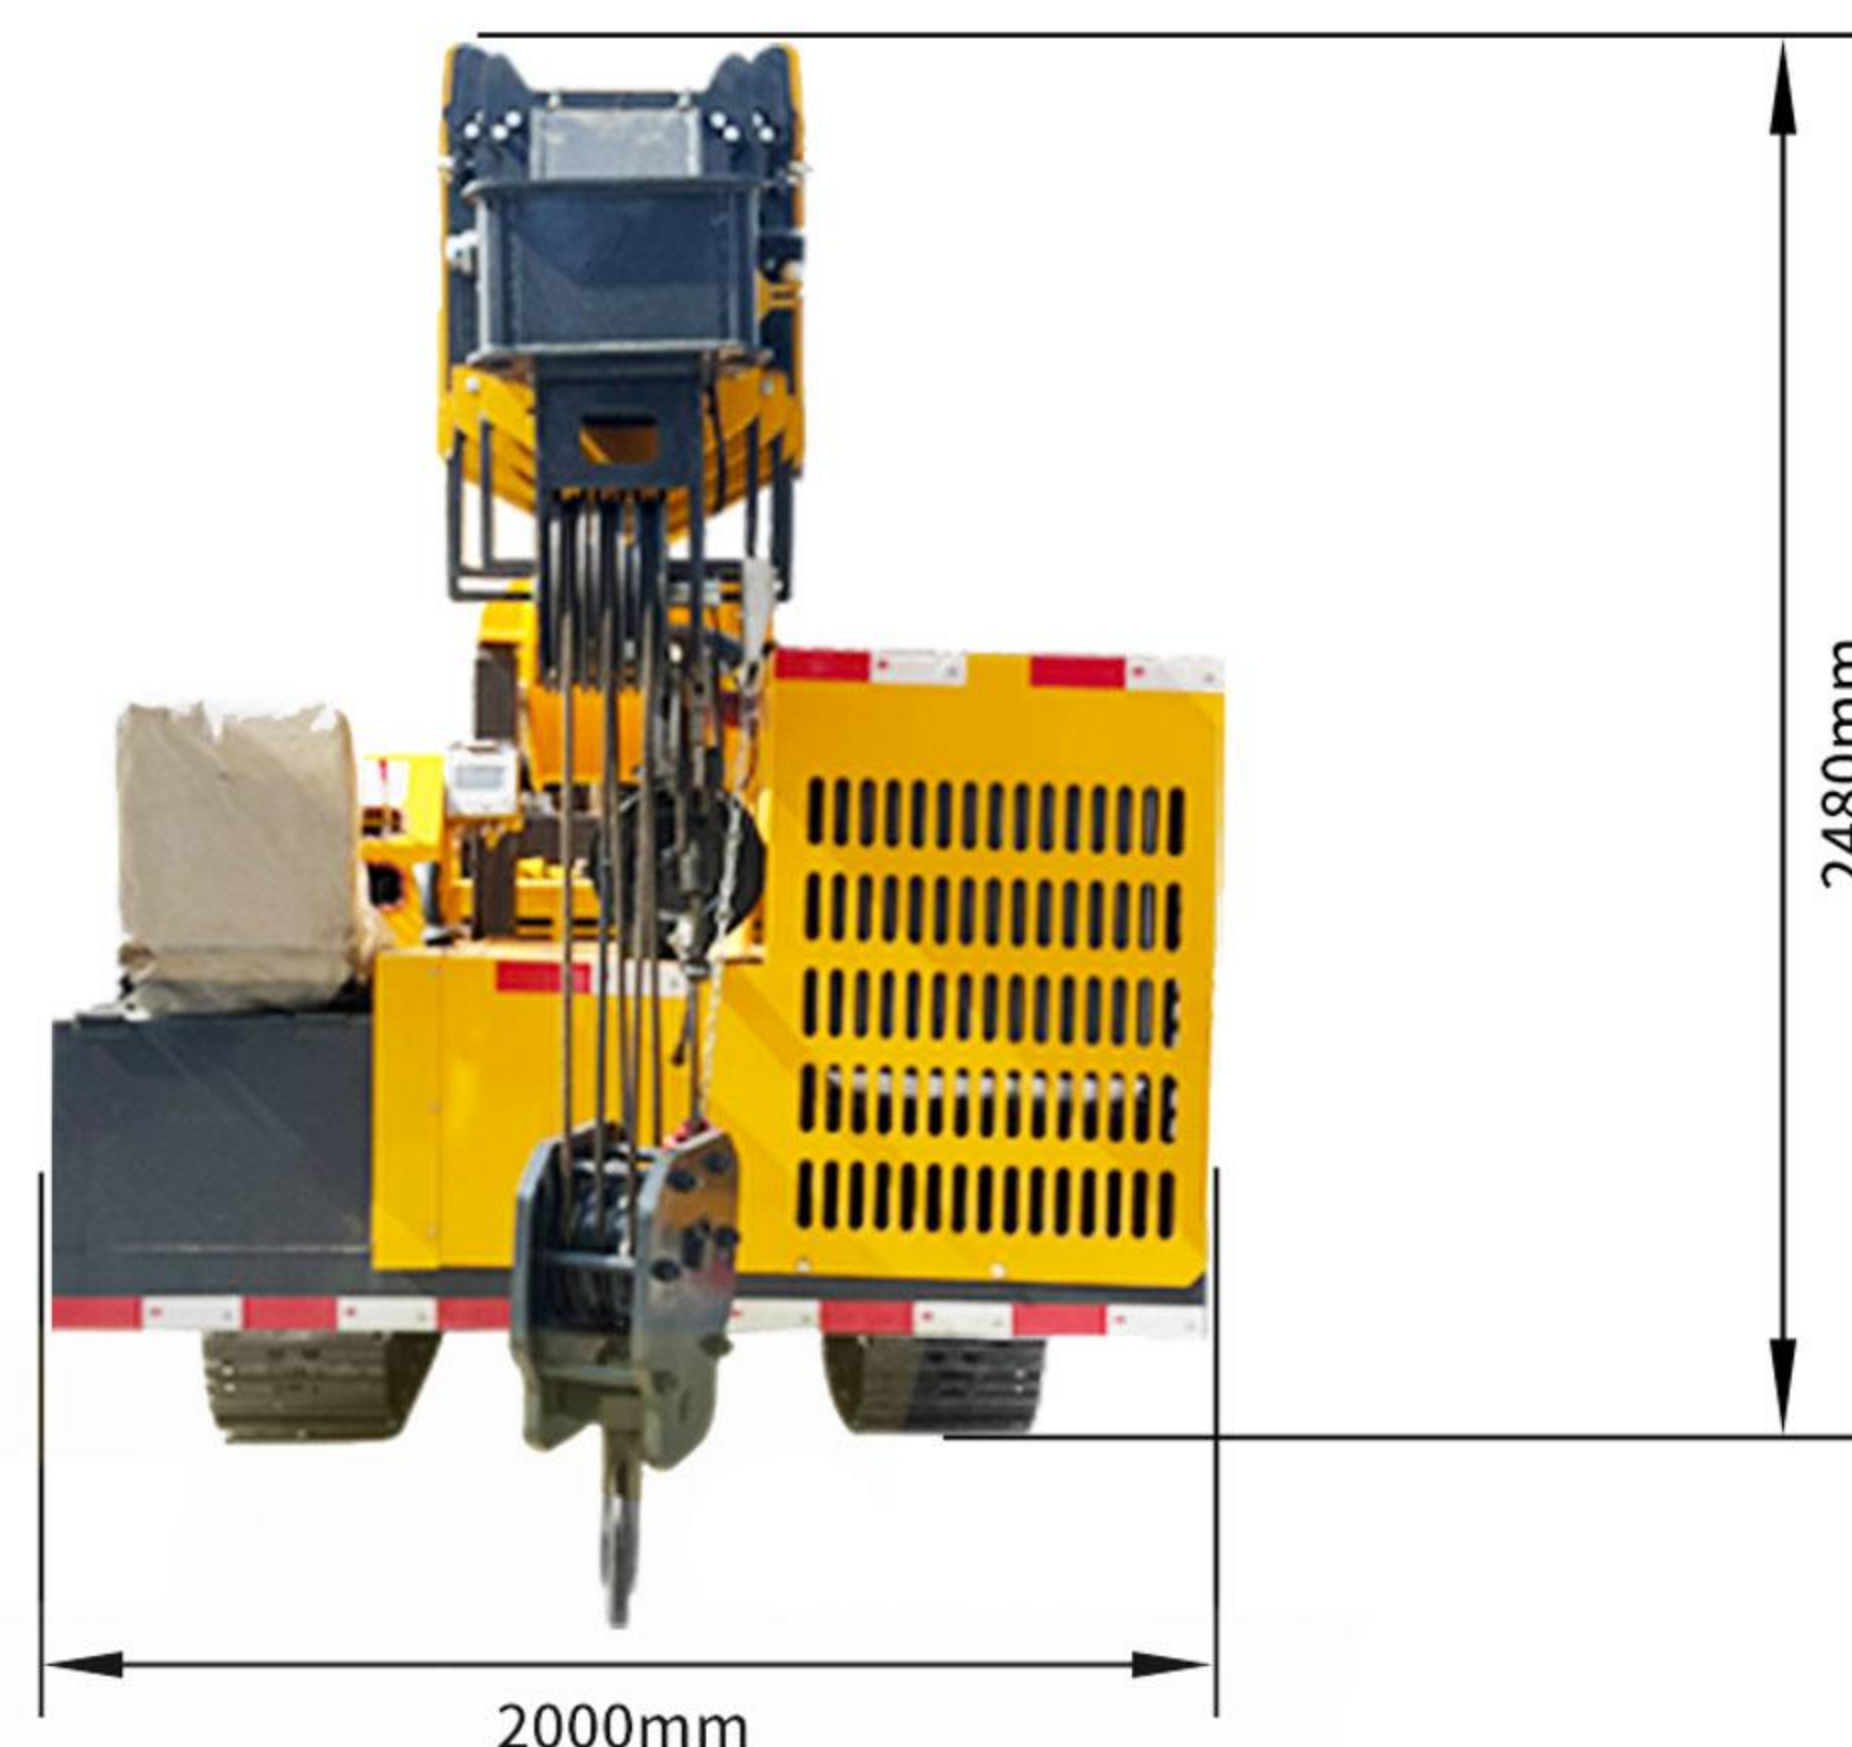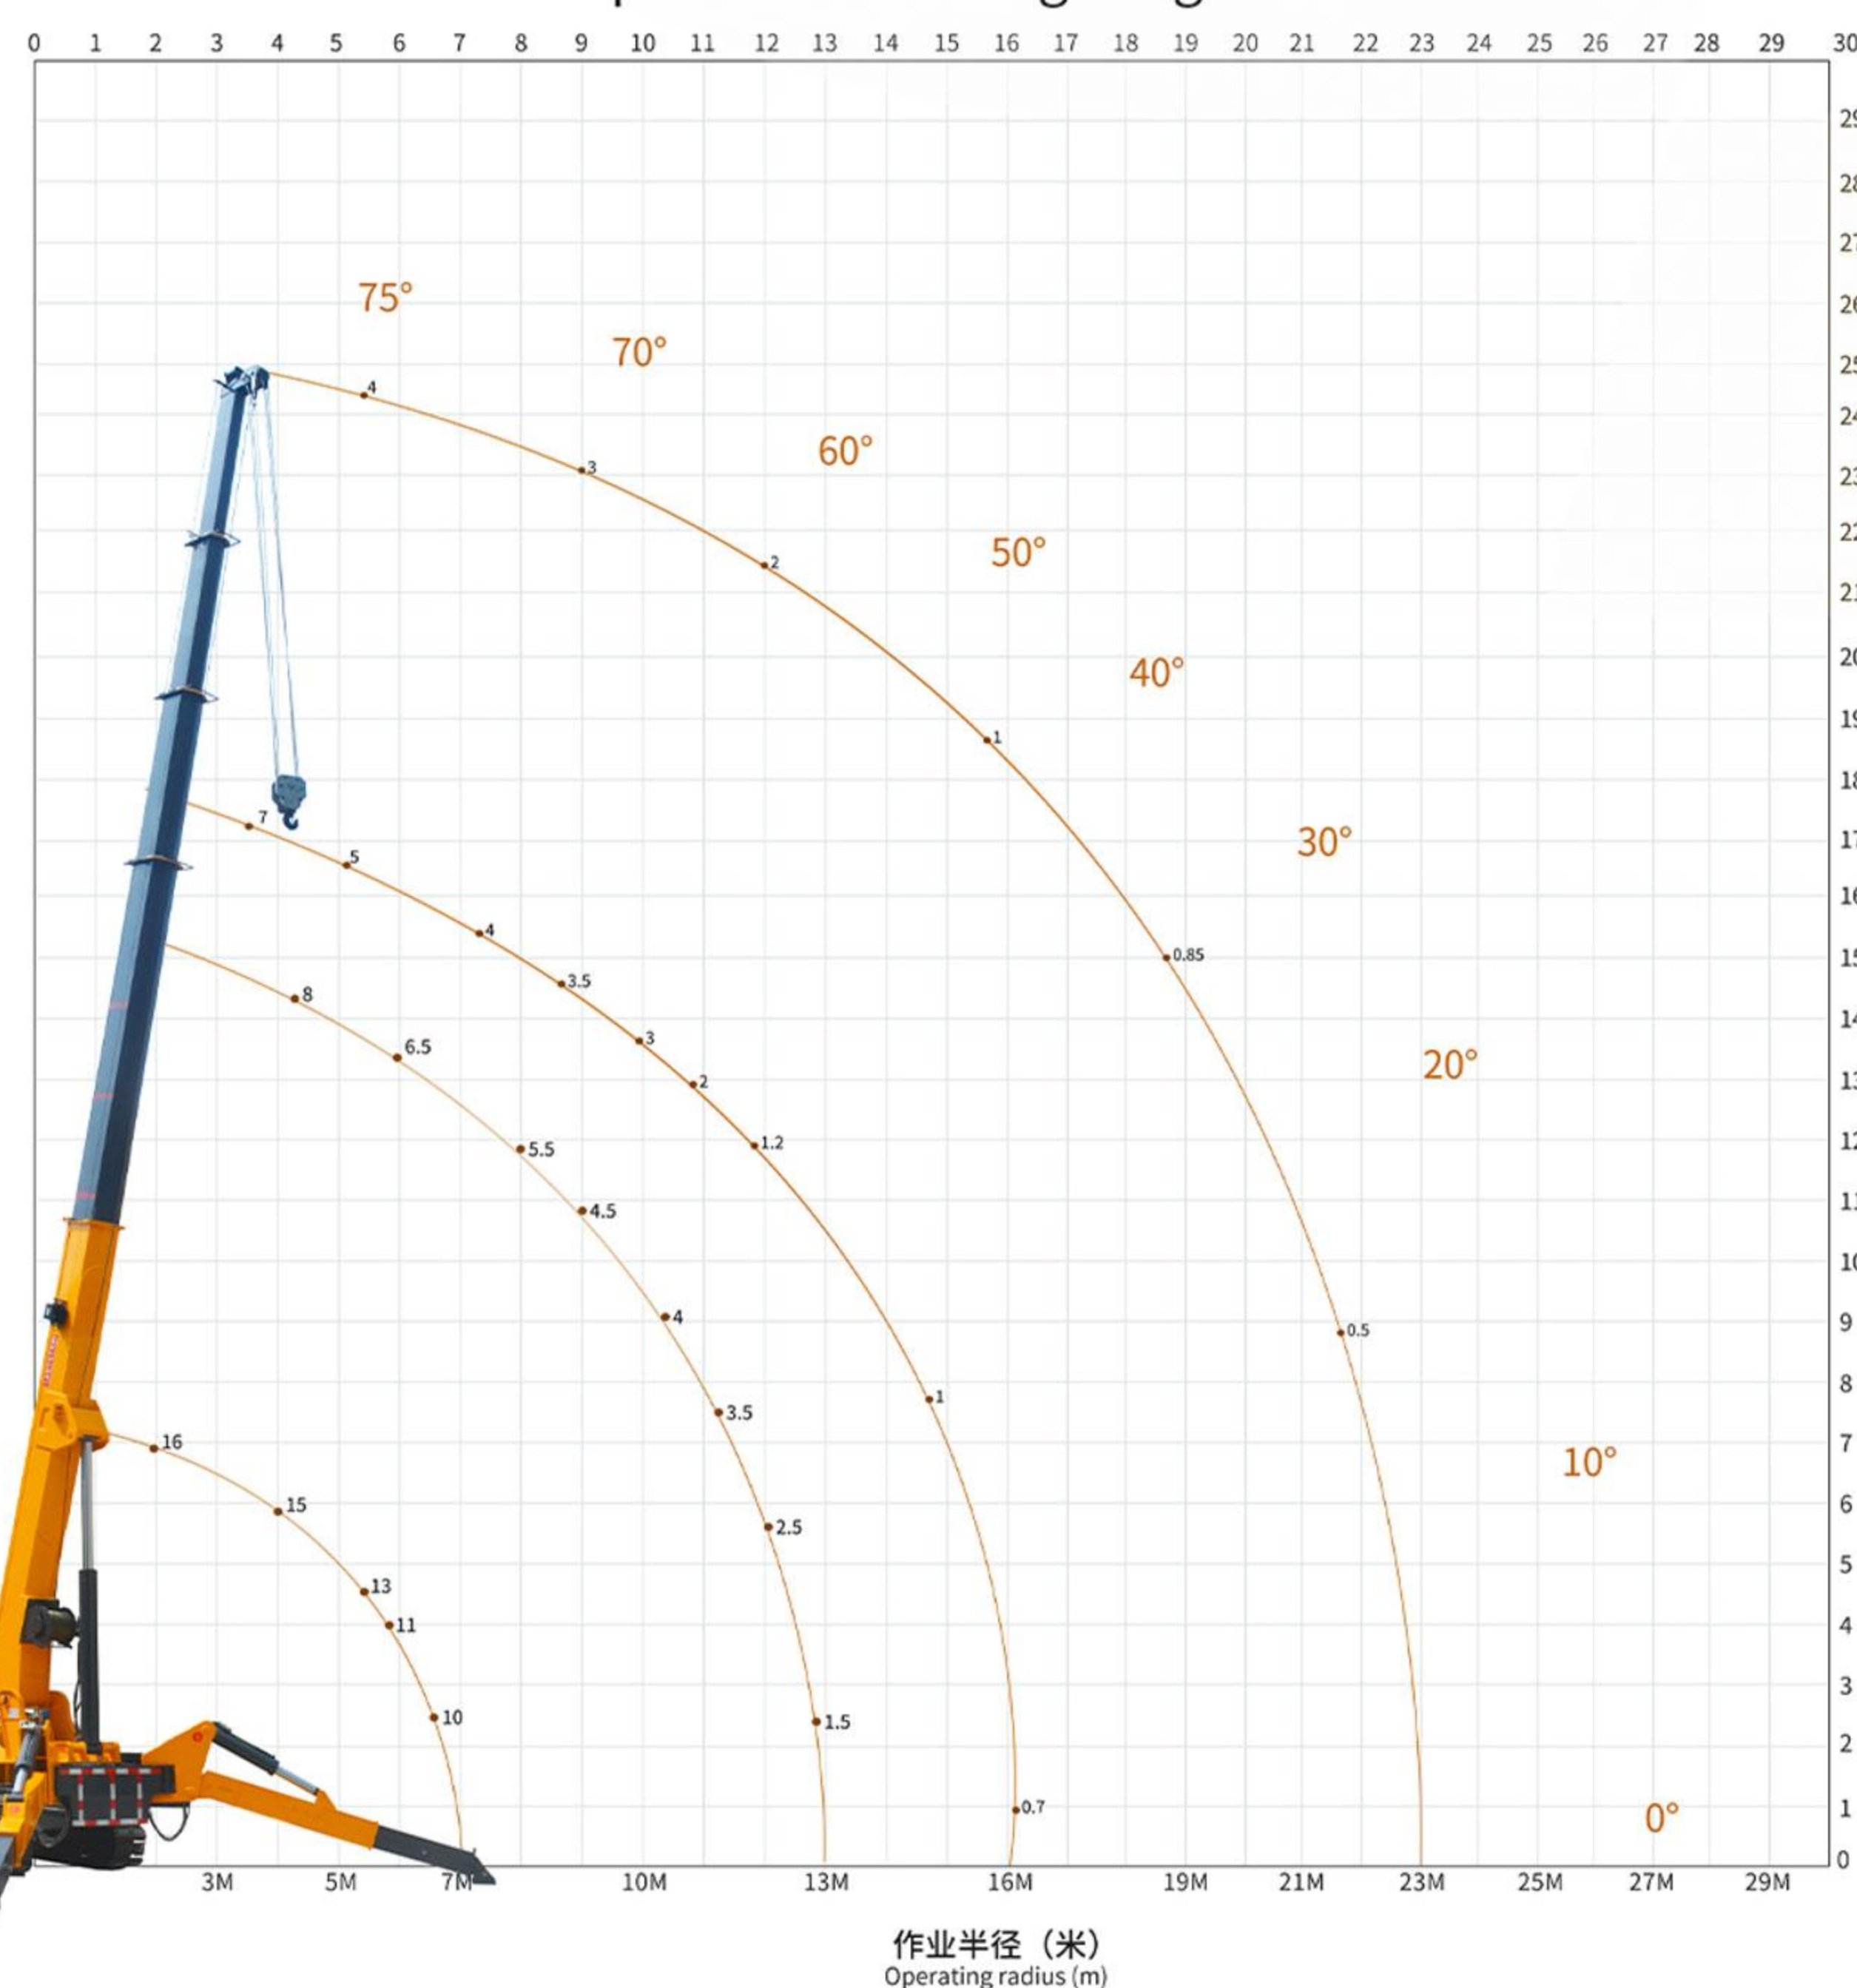

16吨蜘蛛吊机参数

16-ton Crawler Spider Crane

16T蜘蛛吊机 16T Spider Crane			
自重 (T) dead-weight (T)		16.5T	规格 Specifications
最大作业半径 Maximum operating radius		23m	最大地上扬程 Maximum ground lift
卷扬装置 Winch device	吊钩上升速度 Hook lifting speed	10m/min (4绳) 双速 10m/min (4 ropes) double speed	生产方 Manufacturer
	钢丝绳规格 Specification of steel wire rope	Φ12mm×160m	玉柴 (可定制) 85kw Yuchai (customizable) 85kw
	卷扬机规格 Hoist specifications	16T	排放标准 Emission standard
伸缩装置 Telescopic device	伸缩臂形式 Telescopic arm form	6m*5节吊臂 (可定制) 6m*5-section lifting arm (Support customization)	启动方式 start mode
	吊臂长/时间 Boom length/time	12.3m/40sec (可调节) 12.3m/40sec (adjustable)	电启动 Electric start
	伸缩臂长度 Telescopic arm length	6.5m-25m	启动性能 start performance
支腿 Outrigger	支腿动作形式 Outrigger movement form	手动旋出+液压伸缩+液压支撑 Manual screw out + hydraulic telescopic + hydraulic support	燃料/容积 Fuel/Volume
	最大伸出幅度 (mm) Maximum extension amplitude (mm)	8600 (长) X6200 (后) X7300 (前) 8600(length) X 6200 (rear) X 7300 (front)	柴油/45L Diesel oil/45L
行走装置 running gear	行走方式 Walking mode	液压驱动 hydraulic drive	操作系统 operating system
	行走速度 Walking speed	0-2.5km/h	操作种类 (吊臂/支腿) 手动行走 Operation type (boom/leg), manual walking
	爬坡能力 Gradeability	25°(36%)	手动操作、手动行走(可选遥控操作) Manual operation, manual travel (optional remote control operation)
	履带结构 Track structure	钢制履带 Steel track	操作特性 Operational Characteristics
可选装 Optional		可选装力矩控制器/遥控器/吊篮/液压飞臂/颜色: 红、绿、黄、白、灰、黑 Optional torque controller/remote control/cradle/hydraulic flying jib/colors: red, green, yellow, white, grey, black	
		变幅装置 Luffing device	吊臂角度/时间 Boom angle/time
		回旋装置 gyroscope	回转角度/速度 Rotation angle/speed
		整车尺寸 Vehicle Size	长7.2米 宽2米 高2.48米 7.2meters long, 2meters wide, and 2.48 meters high
		履带 (mm) Track (mm)	135(节距) 48(节) 400(宽) 135(pitch)48 (section)400 (width)

16T蜘蛛吊润滑部位图

16T spider crane lubrication parts diagram

注: 转盘、大臂须定时保养(20天为一周期) / “但凡出臂, 大臂处抹黄油”
Note: Turntables and jibs must be maintained regularly (20 days as a cycle) / “Whenever the jibs are out, grease the jibs.”

润滑点标记颜色 Lubrication point marking color	润滑周期 lubrication cycle	润滑方法 Lubrication method	润滑油种类 Lubricant Type
红色 red (color)	每周 daily	油枪注入/涂抹 Grease gun injection/application	硫化钼重型机油膏 Molybdenum Sulfide Heavy Duty Grease
绿色 (发动机机油) Green (engine oil)	100小时 100h	换油 oil change	SI10W-30机油 SI 10W-30 Motor Oil
黄色 (减速机) Yellow (reducer)	100小时 100h	涂抹 apply (makeup etc)	CKC220矿物齿轮油 CKC220 Mineral Gear Oil

This product is strictly prohibited from being exposed to rain.
本产品严禁雨淋



液压飞臂
Hydraulic Flying Arm



力矩显示器
Torque Indicator



吊篮
gondola (of cable car)



无线遥控器
wireless remote

型号齐全 现货供应

Complete range of models · In-stock supply

